

0 5 10 15 20 25 30 35 40 45 50

Scale m's

Existing Habitat Area

Surestart Nursery

WASHFORD DR

WENDOVER ROAD

Soft Outdoor PE

Sensory garden

Outdoor canopy

Hard Outdoor PE, existing macadam surface retained

Existing cycle shelter


Soft Social & Informal

WENDOVER ROAD

Vehicular entrance

Vehicular/pedestrian entrance

A Tree Planting in Landscape Area
14 - 16cm girth trees

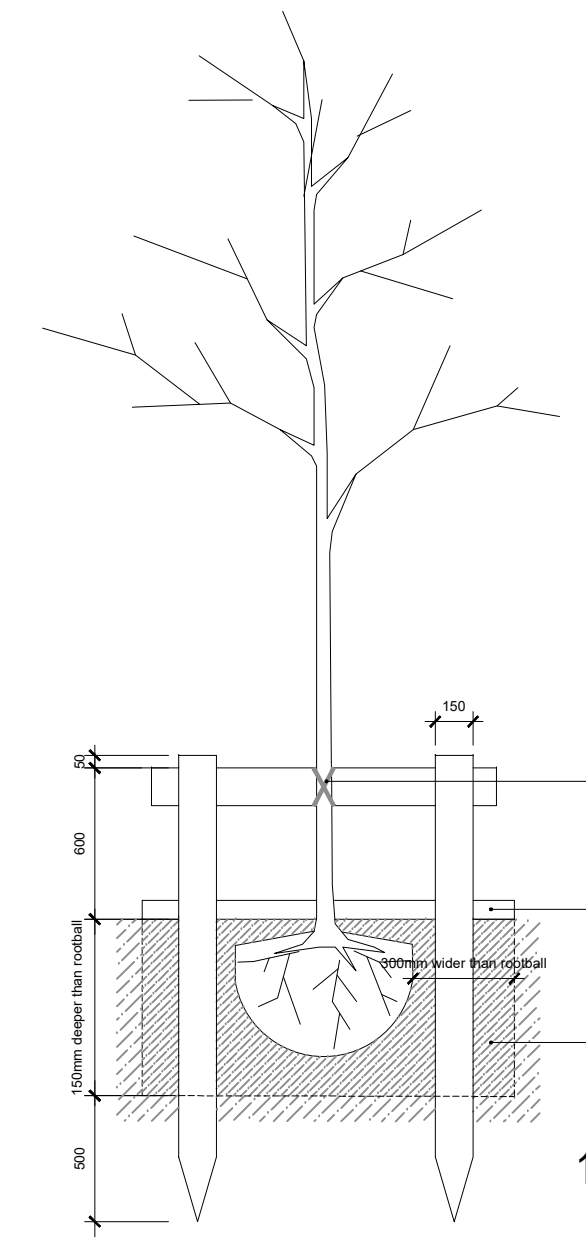

TREE PIT SPECIFICATION NOTES - 14 - 16cm girth trees

Tree pit to be excavated to allow adequate clearance between the perimeter of the root ball and the side of the pit. The depth of the pit to be a minimum of 700mm and at least 750mm greater than the depth of the root ball.

Stakes and rail to be half-round 100mm diameter sweet chestnut or peeled larch poles, pointed at one end, preserved to resist rot for their intended lifespan, and strong enough to take nails without splitting. Stakes driven in to be a minimum of 500mm below the bottom of the pit and 500mm above ground level.

Rail secured to the stakes with 2No. galvanised nails per stake.

Tree to be secured to the rail using 2No. approved tension natural fibre ties nailed to the rail. Ties are to be secured so as to allow for movement but prevent damage to the trunk.

75mm depth layer medium grade bark mulch, 1.2m diameter circle around each tree located in grass.

Topsoil

NOTES

Copyright. All rights reserved. This drawing must not be reproduced without permission. This drawing must not be scaled. Dimensions are in millimetres unless specified.

Rev	Date	Notes	By	CHK
01	21.02.23	Final issue	NH	NH
02	28.02.23	Updated for CDM 5	NH	NH
03	03.03.23	Updated for CDM 6	NH	NH
04	23.03.23	Stage 3	NH	NH
05	28.03.23		NH	NH
06	11.04.23	Updated	NH	NH
07	18.04.23	Future Extension Address added	NH	NH
08	08.05.23	Final revision received	NH	NH
09	21.06.23	Tree to be removed numbered in table 1 Make 3/100 trees to be removed and 4/400 new trees.	LC	NH
10	03.05.23	Planting plan added to grass area to 1/10 of school, grass reserved for planting 1/100	NH	NH