

8116 - Fenix Restaurant

WC Provision / calculation

FOH - 200 Covers

100 males / 100 females.


Referring to BS6465-1:2006, Table 10

Table 10 Minimum provision of sanitary appliances for restaurants and other places where seating is provided for eating and drinking

Sanitary appliance	For male customers	For female customers
WC	2 for up to 150 males; plus 1 for every additional 250 males or part thereof 2 for up to 50 males if urinals are not provided	2 for up to 30 females; plus 1 for every additional 30 females up to 120; plus 1 for every additional 60 females or part thereof
Urinal	1 per 60 males or part thereof up to 120 males; plus 1 for every additional 100 males or part thereof	-
Washbasin	1 per WC, plus 1 per 5 urinals or part thereof	1 per WC
Cleaners' sink	As 3.5	


100 males = 2WC`s, 2 Urinals & 3 Washbasins

Current Male WC - FOH layout

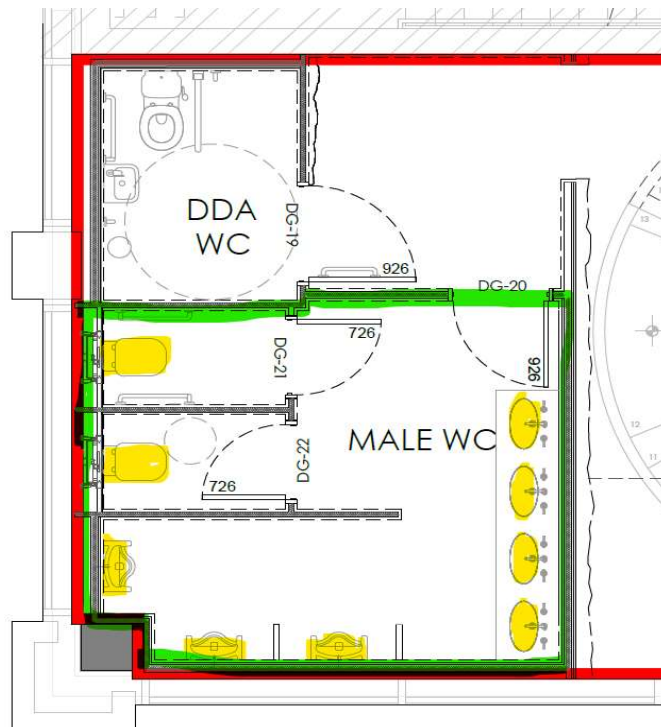

100 Females = First 30 females = 2WC`s; 100-30 = 70/30 = 2.3 WC`s
= 5WC`s & 5 Wahsbasins

Current Female WC - FOH layout

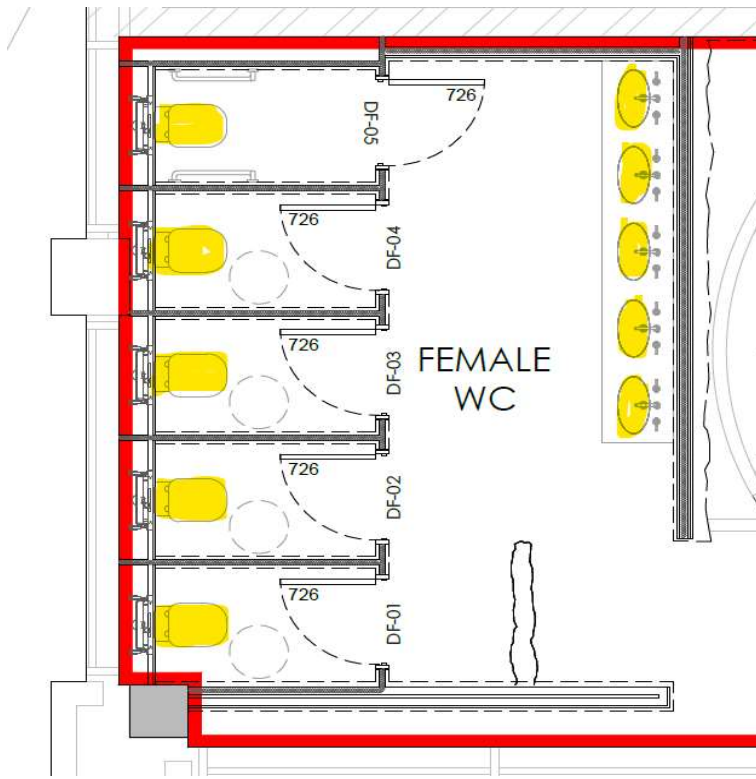

Staff Provision - 30-40 on average

Referring to BS6465-1:2006, Table 3


Table 3 Minimum scale of provision of sanitary appliances for staff toilets in offices, shops, factories and other non-domestic premises used as place of work

Sanitary appliances for female staff, and for male staff where urinals are not installed		
Number of persons at work	Number of WCs	Number of washbasins
1 to 5	1	1
6 to 15	2	2
16 to 30	3	3
31 to 45	4	4
46 to 60	5	5
61 to 75	6	6
76 to 90	7	7
91 to 100	8	8
Above 100	8, plus 1 WC and washbasin for every unit or fraction of a unit of 25 persons	


30-40 staff will be within 31-45 bracket and therefore require 4 WC's & 4 washbasins

The current proposal is to provide 2 unisex toilets BOH and include the Accessible WC on the Ground Floor adjacent to the Male WC, which is over the FOH provision and the Accessible WC to the Mezzanine floor in the staircore

Ground Floor Staff Provision

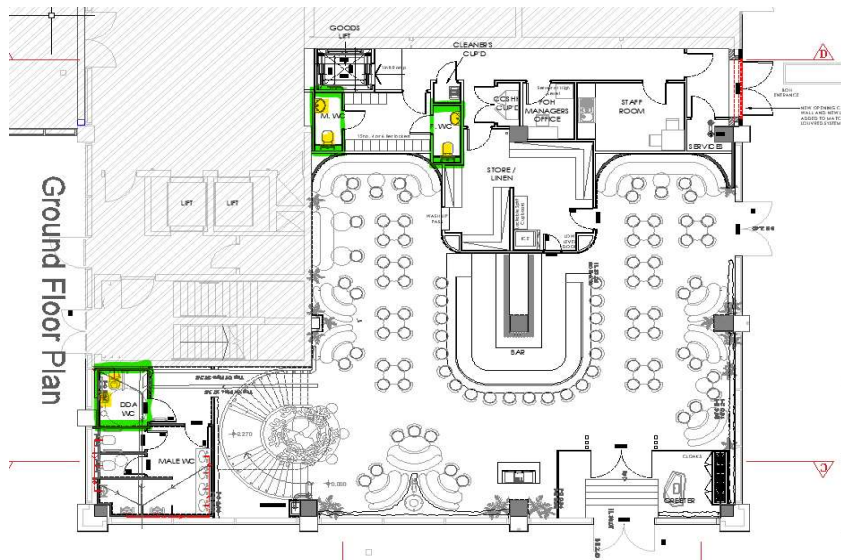

Mezzanine Floor Staff Provison

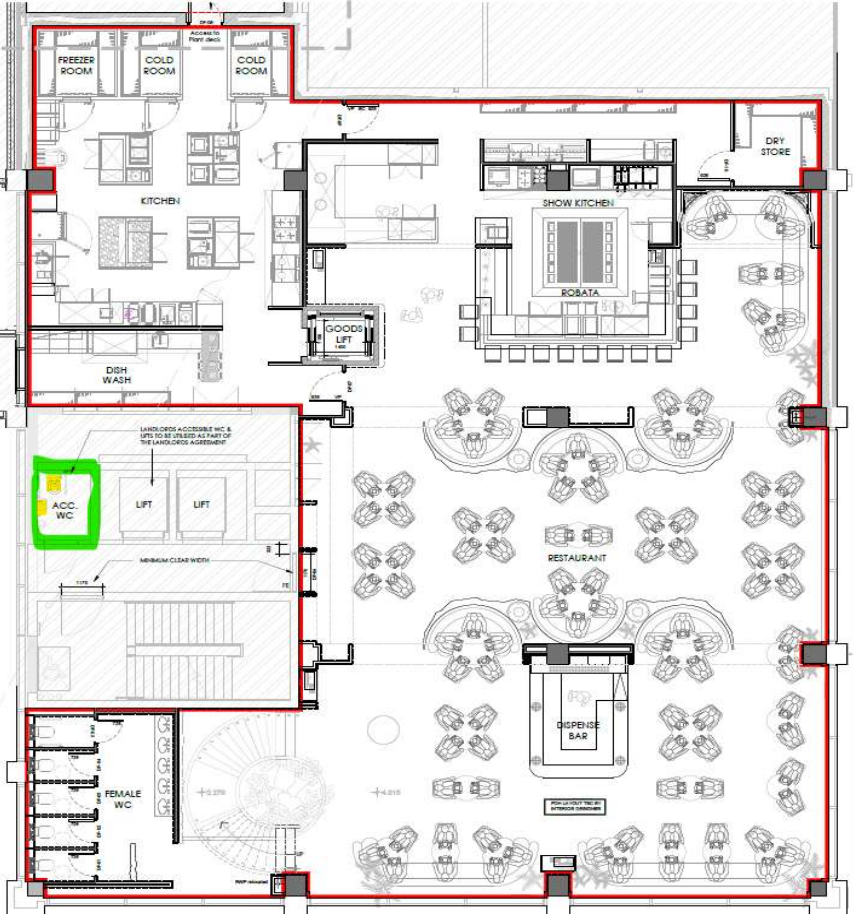

Where there are instances that staff numbers are above 45 then the Accesible WC on the Upper Floor will be available.

Typical Staircore Layout to upper levels

