
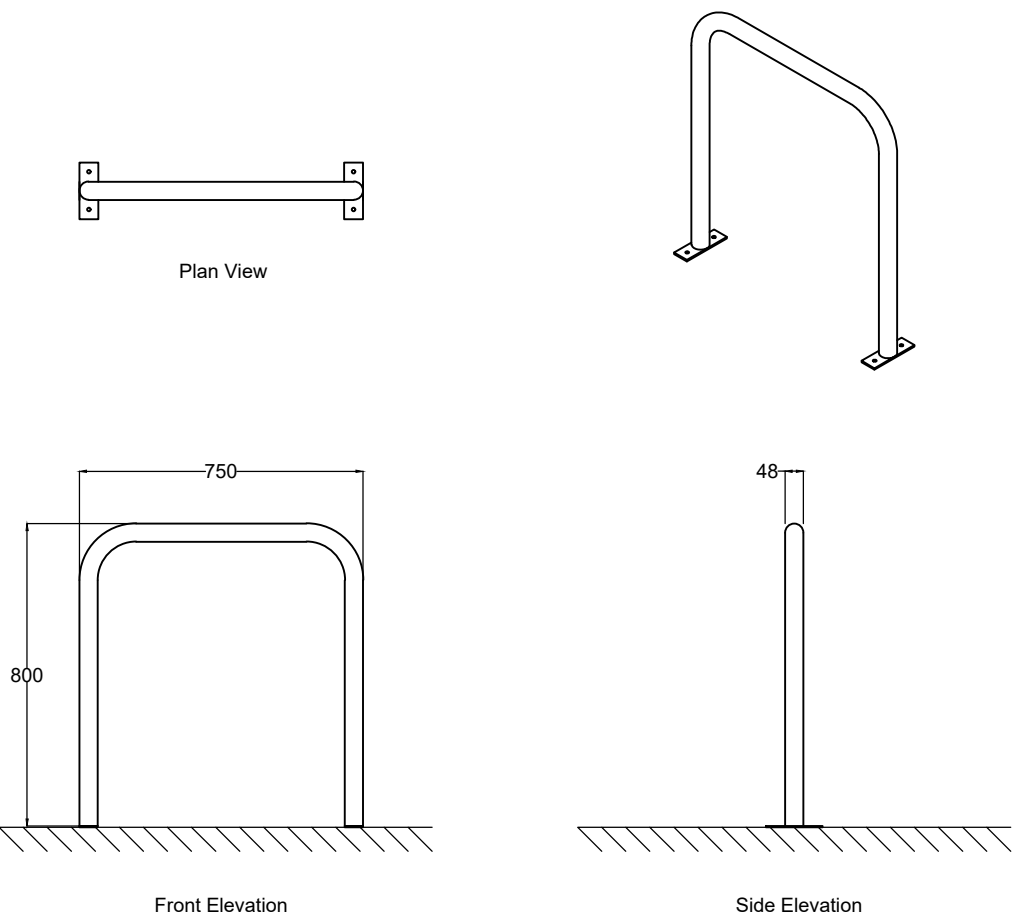


Signage for both General Waste and Recyclable waste to be provided in accordance with BREEAM requirements and criteria.

Bin storage covered (Sedum roof) and lighting provided.

Cycle Hoops provided accordance with BREEAM requirements and criteria. (Min 7No. Cycles) but to be maximised to suit space available). Cycle storage covered (Sedum roof) and lighting provided.

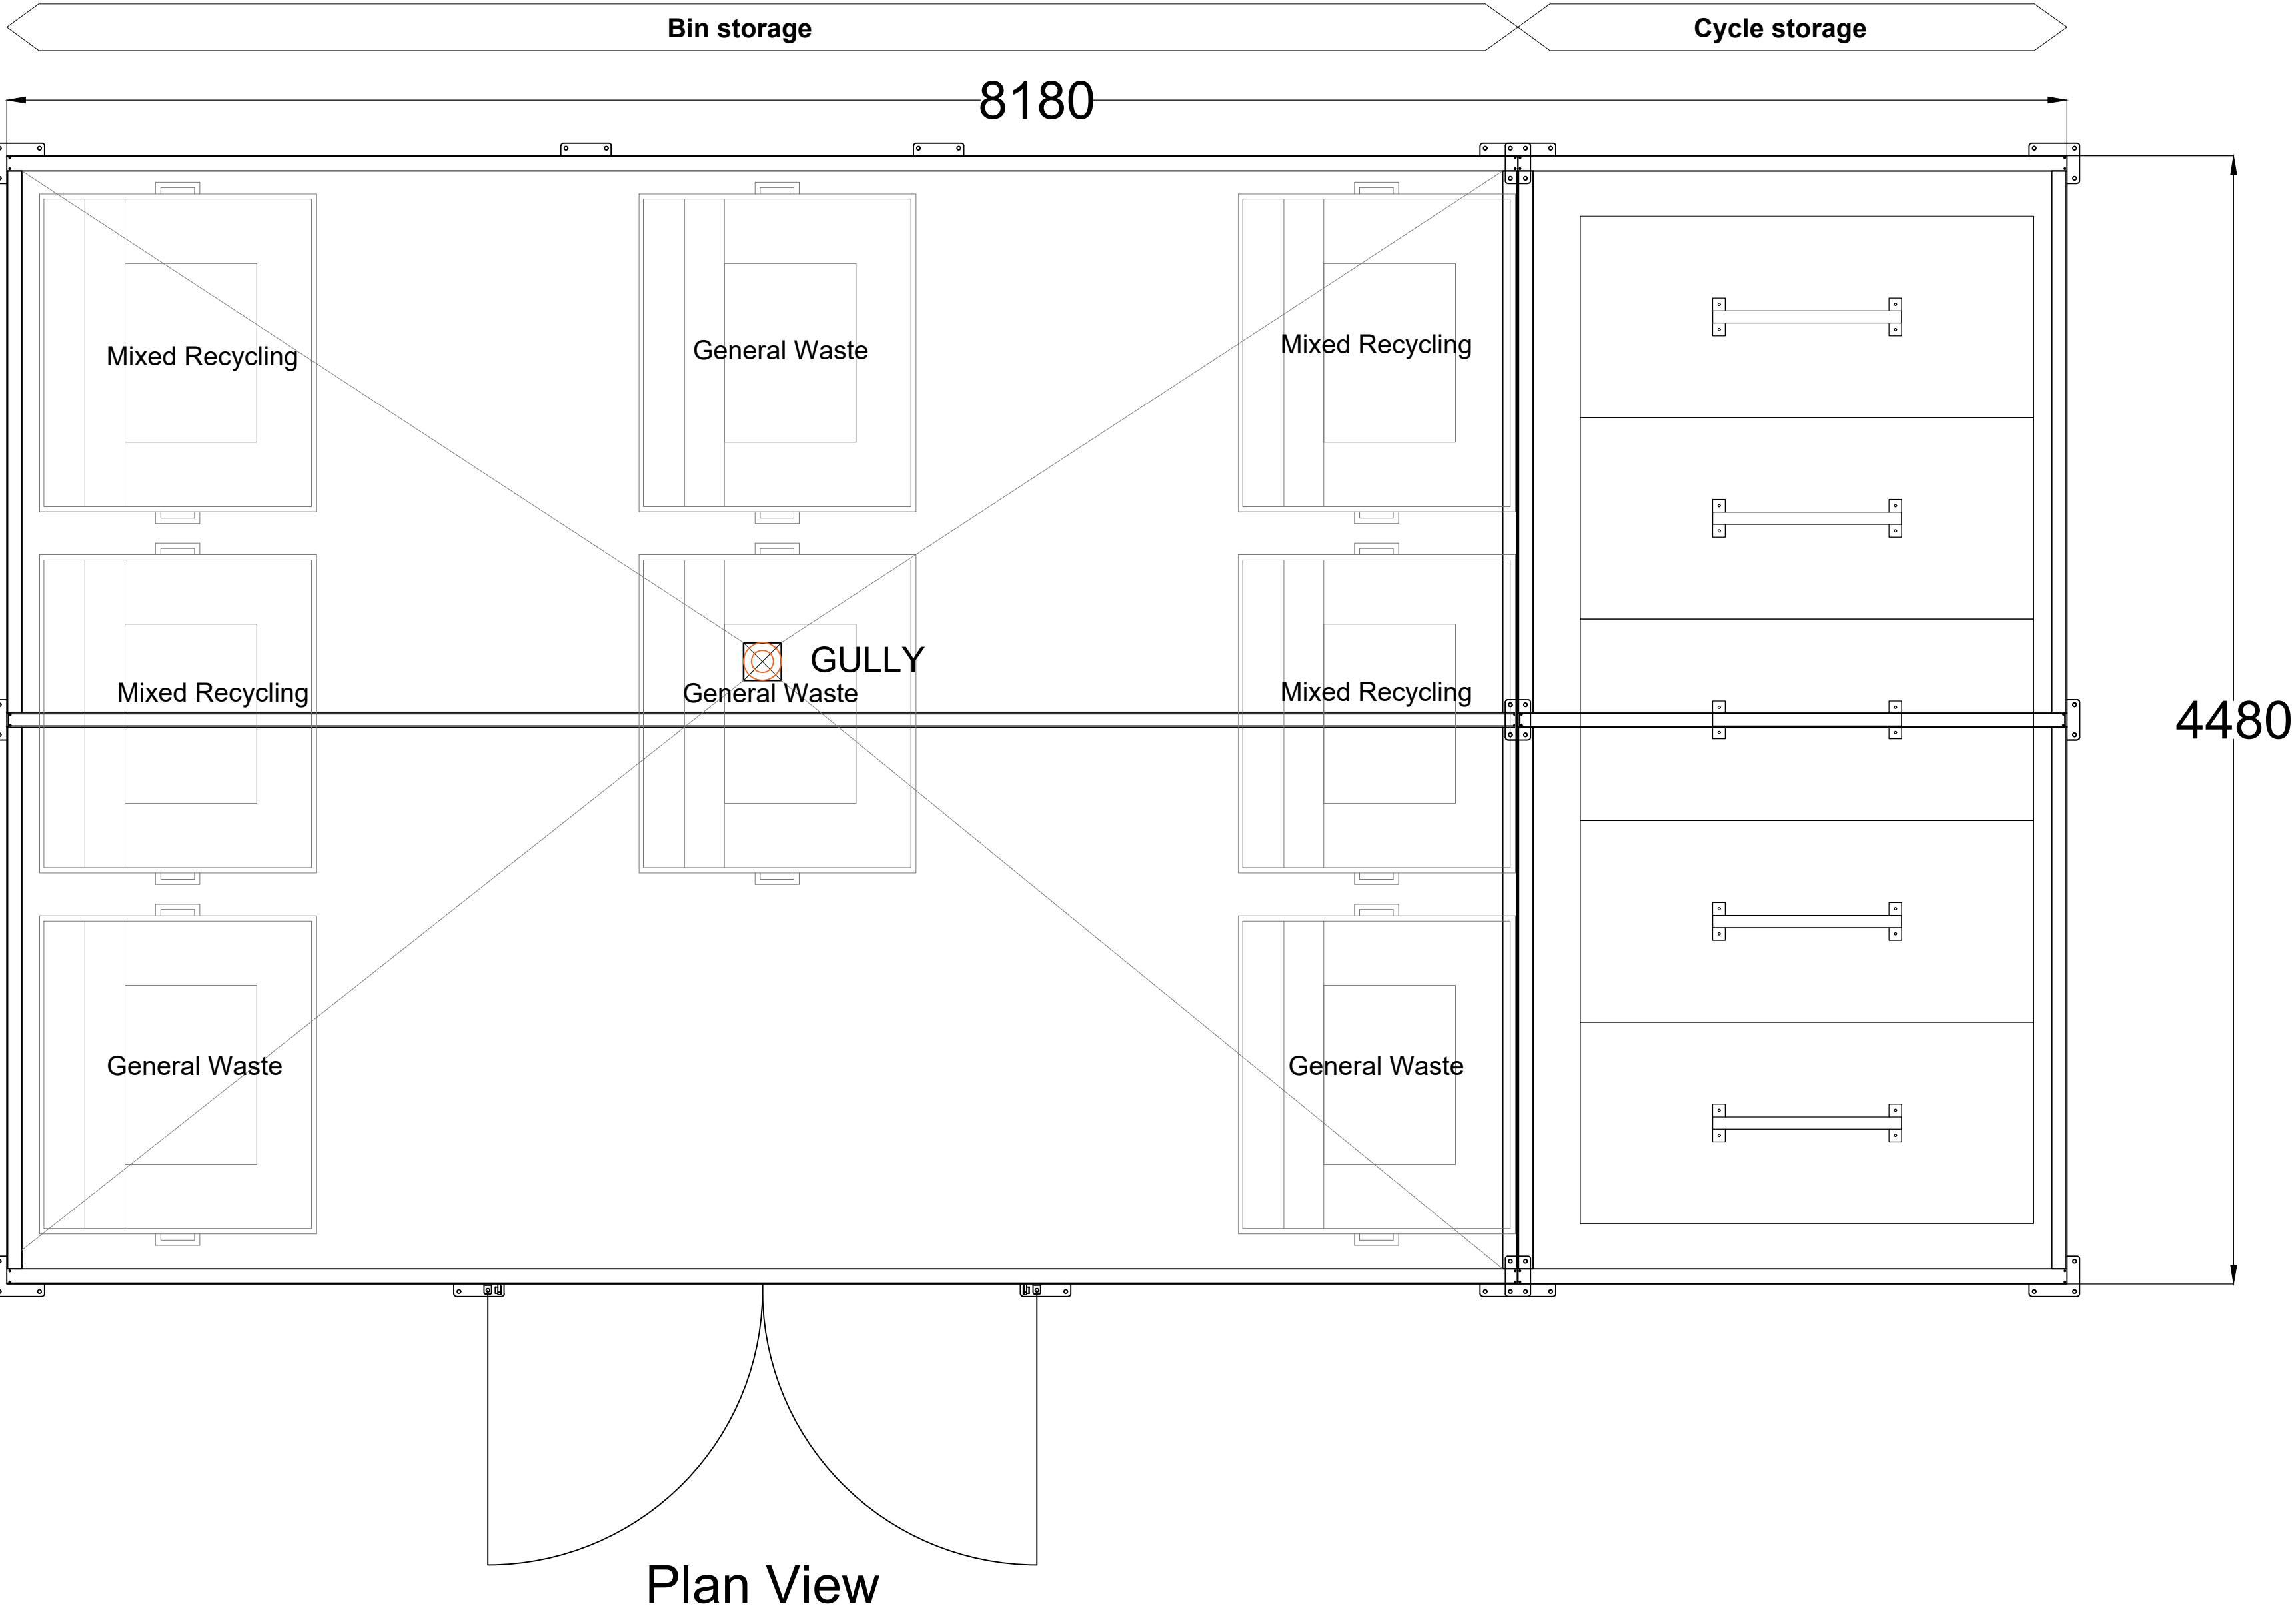

NOTE:

* All setting out to account for as-built positioning of kerb lines and change in level between bin store and surrounding areas. Falls to be accounted for when installing the enclosure. full width boards only to be used for fencing *


* sub-contractor to provide input on the stability of the enclosure given sizes as required *

* Gully for washdown to be provided.

*Subject to waste management strategy Bib tap for wash-down maybe required or mobile washdown subcontractor can be used (Cleint and M&E Consulatant to advise).

Exact Gully location shown indicative, adjusted as required to suit falls and drainage requirements. Refer S.E information for further details.

*Colour: All metal work PPC and Timber to be painted:

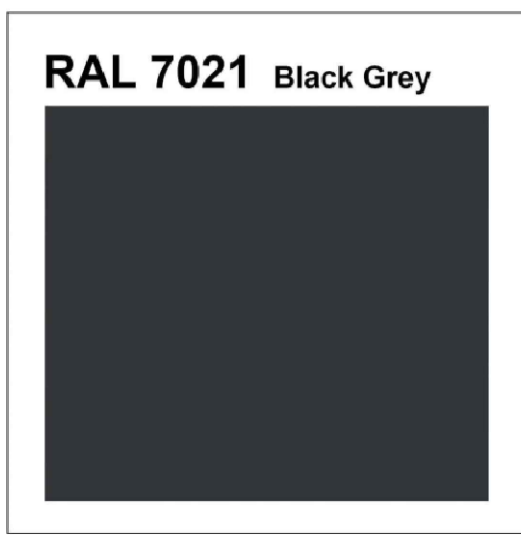

* Sedum Roof to specilaist details and recommendations*

Note drawing and specification based on Turvec Cubic Shelters, see photos for typical examples

