



e3p

Phase II Geoenvironmental Site Assessment
Renaissance, Manchester

Reference: 14-261-R2-1
Date: 21st May 2021



PHASE II GEOENVIRONMENTAL SITE ASSESSMENT

Renaissance
Deansgate
Manchester
M3 2FE

Prepared for:
Property Alliance Group Ltd



Report Ref: 14-261-R2-1
Date Issued: 21st May 2021

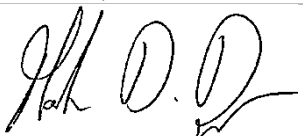
E3P

Taylor Road
Trafford Park
Urmston
M41 7JQ

+ 44 (0) 161 707 9612
<https://e3p.co.uk/>

Registered in England
CRN: 807255262

QUALITY ASSURANCE

PROJECT NUMBER	14-261		
VERSION	Version 1		
REMARKS	Issue 1		
DATE	21 st May 2021		
PREPARED BY	N Sellars		
QUALIFICATIONS	MSci (Hons), FGS		
SIGNATURE			
CHECKED BY	S Ellis		
QUALIFICATIONS	BSc (Hons), FGS, CEnv		
SIGNATURE			
AUTHORISED BY	M. Dyer		
QUALIFICATIONS	BSc (Hons), FGS, AIEMA, MIEEnvSc, CEnv		
SIGNATURE			



Cert No 18890



EXECUTIVE SUMMARY

Site Address	Land to the west of Deansgate, Manchester, M3 2FE	
Grid Reference	E383745, N398616	
Site Area	0.53 Hectares	
Proposed Development	E3P understands that the proposed development will comprise offices and residential apartments with associated car parking.	
Current Site Use	The subject site currently has several land uses; the Renaissance Hotel, Premier House, Doms Tavola Calda restaurant and an NCP car park. The site comprises a multi-storey building of varying heights with a lower level car park. Externally to the building, there are areas of hardstanding used for walkways and entrance and exit roads for the lower level multi-storey car park. There are retaining walls at the bottom level of the car park.	
Site History	The site has been developed since pre 1848. Historic town plans from 1850-1851 show a Copper Roller Works and a Cotton Finishing Works in the centre of the site and a Wind Turning Mill in the south, with a section of the Water Side Mill in the south west. The historic town plan from 1891 shows an old quarry in the centre of the site. A hotel was recorded in the north of the site pre 1891, with other unspecified buildings recorded across the footprint. From 1908 a building named the Temperance Hotel was in the centre of the site until 1948 until it was named as a ruin which may indicate bomb damage. An access road named Grosvenor Avenue was also present from 1948 along the west of the buildings. From 1973 a larger hotel building and a car park are recorded as present. The site has remained relatively unchanged since 1973.	
Environmental Setting	Drift Geology	Glaciofluvial Sheet Deposits (Devensian) – Sand and Gravel.
	Bedrock Geology	Chester Formation – Sandstone.
	Faults	No faults are mapped on site.
	Hydrogeology	Secondary A aquifer strata (drift geology) overlying a principal aquifer (bedrock geology).
	Hydrology	The River Irwell is located 5 m west of the site and forms the western boundary. The river is classified by the EA to have a river quality of E (poor).
	Flood Risk	The site is located within Flood Risk Zone 1 and is considered unaffected by river flooding.
Previous Reports	The following previous reports have been completed for the site:  E3P – Phase I Geoenvironmental Report (Ref: 14261-R1-1, September 2020). The E3P Phase I Report should be read in conjunction with this report.	
Utility Locations	Overflow sewers (culverts) are present in the south-west corner and adjacent to the north. A low-pressure gas main is located through the centre of the site, in the basement. LV and 6 to 6.6 kV electricity cables and BT connections are also present.	
Landfill Sites and Ground Gases	There are no BGS recorded landfill sites located within 500 m of the site boundary. There were also no historical landfill sites located within 500 m of the site.	



Radon	Unaffected – no special precautions required.
Coal Mining/Land Stability	The site is not situated within a development high risk area. There are no mine entries recorded within 500 m of the site boundary. There are also no past shallow coal mine workings or probable shallow coal mine workings or coal outcrops within 500 m of the site boundary.
Brine Workings	The site is not located within an area deemed to be at risk from ground instability arising from historic brine pumping activities and/or salt extraction
Hazardous Installations	No hazardous installations that could potentially prejudice the proposed construction of highly sensitive residential dwellings have been identified within influencing distance of the subject site.

GROUND INVESTIGATION

Ground Investigation Works	E3P has completed an intrusive ground investigation comprising: ✿ 4 x mechanically excavated trial pits ✿ 2 x wall cores, ✿ 6 x rotary boreholes ✿ Construction of environmental monitoring installations.
Ground Conditions	Made Ground – 0.00 m bgl to 1.50 m bgl Made Ground deposits were encountered within all exploratory hole locations to a maximum proven depth of 1.50 m bgl. Made Ground deposits generally comprise concrete to circa 0.35 m bgl underlain by grey sandy gravel of limestone (Type 1 MOT). In addition, RBH102 identified a brick wall between 0.70 m and 1.50 m bgl. RBH104 identified a brick wall between 0.35 m and 0.80 m bgl. The full depth is not proven due to the limitations of the scope and access. TP101–TP104 identified concrete with a rubber membrane, over brown gravelly fine to medium sand with concrete and brick to 0.70 m bgl. There is the potential for deep Made Ground to be present in the location of the former quarry. DRIFT Drift deposits were not encountered during the ground investigation. There is the potential for drift deposits to be present in areas that have not been investigated to date. SOLID – 0.35 m bgl to >10.00 m bgl The solid bedrock geology was encountered between 0.45 m and 10.00 m bgl. The solid geology comprises dense to very dense SANDSTONE. The bedrock will be weathered and the actual depth can only be profiled after the post demolition ground investigation. Weathered sandstone bedrock was encountered as reddish brown medium SAND between 0.35 m and 1.50 m bgl in RBH101 and between 0.70 m and 0.80 m bgl in TP101, TP103 and TP104. A former quarry is present in the centre of the site, therefore there is the potential for notable changes in the depth of bedrock.



Ground Conditions	GROUNDWATER – Groundwater strikes were not encountered during the ground investigation. Subsequent monitoring recorded groundwater between 1.40 m and 3.68 m bgl.
Foundation Pits	TP101, TP103 and TP104 identified the foundation slab within the SANDSTONE from 700 mm, the full depth was not determined. TP102 identified the foundation slab from 400 mm to 700 m within the Made Ground.
Rotary Core into Retaining Walls	WC101 went through 300 mm of the brick wall and then a service void to 1.30 m bgl and then 200 mm into the concrete retaining wall. The core could not penetrate the water membrane within the concrete retaining wall. WC102 was cored through a service void and then 200 mm into the concrete retaining wall. The core could not penetrate the water membrane within the concrete retaining wall.

CONTAMINATED LAND ASSESSMENT

Human Health	The Tier I assessment identified a single exceedance for asbestos. Loose chrysotile fibres were identified in the granular Made Ground in TP104 at <0.001 %. No visual signs of ACM were encountered during the ground investigation and it is, therefore, likely that only trace fibres are present. Impacted soils should be managed according to the asbestos risk mitigation conceptual site model. The installation of a suitable cover system in all landscaping and public open space will remove any potential for direct exposure to impacted soils. The specific design and installation process for the appropriate cover systems should be defined within a site remediation and enabling works strategy. Chemical analysis of the natural granular deposits has identified these soils to be acceptable for use as subsoil within the proposed landscaped areas; however, further chemical validation samples will be required to confirm this. There are no suitable sources of topsoil available on the site. Further post-demolition investigations are required to confirm the findings of this initial assessment as and when full and unrestricted access is available.
---------------------	---



Controlled Waters	Leachate and groundwater analysis has identified exceedances of the EQS for chromium, copper, mercury, trichloromethane and pH. Historically, the site has been occupied by a Cotton Finishing Works, Copper Roller Works and Mills which are potential sources of mobile contamination. However, the initial soil analysis has not identified a risk to controlled waters. The site is underlain by shallow sandstone bedrock which is classified as a principal aquifer. However, the majority of the identified inorganic compounds are of low solubility. The sensitivity of the principal aquifer in the bedrock is reduced given the closest potable groundwater abstraction is located 507 m north. Trichloromethane has been recorded above the limit of detection in all three groundwater samples from the rotary boreholes which have monitoring wells set within the sandstone bedrock. All other VOCs are less than the limit of detection. It is unlikely that this relates to residual contamination from the former works and mills located on site as these land uses were historical and the compounds would have degraded. It is considered possible that this compound may have migrated from commercial sites further afield. The site is topographically lower than the land to the east, therefore it is likely that groundwater will flow towards the site and towards the River Irwell. The results of the groundwater analysis indicate a higher concentration of trichloromethane at RBH101 in the north east as opposed to RBH105 located in the south west. An additional round of groundwater sampling and surface water analysis is recommended to further assess the risk to controlled waters. The results will be issued in an addendum report.
Ground Gas	Ground gas monitoring thus far has indicated the site would be classed as Characteristic Situation 1, suggesting no gas protection measures will be required. However, the final ground gas regime will be confirmed following the completion of the ground gas monitoring programme.
Potable Water Infrastructure	This will need to be confirmed following the completion of a UKWIR risk assessment. Post-remediation and enabling works ground conditions may be different from those identified during this site investigation. Current indications suggest that PE pipe will be suitable.

GEOTECHNICAL ASSESSMENT

Underground Obstructions	Significant concrete and brick obstructions have been encountered within the Made Ground, indicative of relict foundations from the former buildings. A culvert is located in the south-west corner of the site and significant obstructions will be present beneath the existing buildings. An infilled quarry is also located in the centre of the site. During a phase of cut-and-fill enabling works to create the development platform, all below-ground obstructions will require grubbing out to the base of the Made Ground to enable the construction of proposed plots.
Allowable Bearing Pressure	The natural SAND (weathered bedrock) has been assessed as being very dense with a net allowable bearing pressure (ABP) in the order of 504 kN/m² at circa 1 m bgl. The underlying SANDSTONE has a net ABP of 403-505 kN/m² between 1.00 m and 9.00 m bgl. Due to the highly fractured nature of the bedrock only one Unconfined Compressive Strength (UCS) test could be undertaken from the core recovered.



Allowable Bearing Pressure	The results indicate that at a depth of between 6.63–6.98 m bgl the sandstone recorded a strength of 3.3 (MPa) which equates to 3300 kN/m ² .
Foundation Options	Given the significant obstructions, prior to the construction of any foundation solution, a programme of remediation and enabling works will be required to remove existing foundation and slab structures and re-engineer the site to provide suitable development platform levels. The Made Ground is not considered a suitable target founding stratum. In respect of the proposed development, E3P consider it feasible to construct the proposed residential apartment blocks utilising piled foundations set within the underlying sandstone bedrock. The final foundation solution will be dependent on the structural loadings, elevation and should be designed by a suitably qualified structural engineer with detailed designs from a specialist piling contractor. Post demolition boreholes are required to further inform the foundation and sub-structure design.
Building Floor Slabs	A ground-bearing slab will be viable; however, it will need to be constructed utilising a sub-base with the thickness designed by a structural engineer to ensure that settlement tolerances are taken into consideration.
Heave Precautions	The site is underlain by granular soils, therefore heave precautions are not required.
Soakaway Drainage	The presence of substantial depths of Made Ground across the site may result in settlement. It is therefore recommended that drain runs are designed using steeper gradients and flexible joints to allow for some differential settlement. The presence of deep Made Ground across the site will preclude the use of soakaway drainage. If soakaway drainage is to be considered, full BRE365 testing must be completed to inform the detailed design.
Sulphate Assessment	Concrete classification will be DS1 AC1s.
CBR Design %	Granular soils can be re-engineered to ensure 5% within the subgrade during favourable climatic conditions.
Cut/Fill	Development levels unknown at this time; however, an element of cut-and-fill works will be required to prepare the development platform.
Civil Engineering Excavations	The E3P Intrusive Ground Investigation has identified the presence of weathered/competent bedrock at a shallow depth, the presence of which will impede the excavation materials to form sewerage and drainage infrastructure and foundations. A former quarry is present in the centre of the site, therefore there is the potential for notable changes in the depth of bedrock. Due to the depth and variability of the Made Ground and the likelihood of trench collapse, it is considered that all excavations are supported or battered back in accordance with the guidance contained in CIRIA R97. Furthermore, the site is topographically lower than the adjacent roadways, consideration must be given to retaining being constructed or current wall adapted to ensure the stability of the soils around the periphery of the site.



Waste Characterisation

Any material that is to be disposed off-site should undergo assessment using Technical Guidance WM3: *Waste Classification – Guidance on the classification and assessment of waste*.

Samples of the Made Ground in TP101 at 0.65 m and TP103 at 0.45 m were compared to the Waste Acceptance Criteria. The WAC analysis suggests that the soils would be classified as stable non-reactive.

RECOMMENDATIONS

Based on the findings of the geoenvironmental site assessment, the following additional works are recommended to be completed in due course:

- ✿ Further investigation of inaccessible areas and extensive post demolition ground investigation.
- ✿ An additional round of groundwater and surface water analysis.
- ✿ Further geotechnical testing to determine the settlement characteristics for ground bearing floor slab (upon completion of the reduced level dig) and pavement design.
- ✿ Foundations to be designed by suitably qualified Structural Engineer.
- ✿ Geotechnical earthworks strategy (infrastructure).
- ✿ Remediation and enabling works strategy.
- ✿ Construction phase Surface Water Management Plan.



Table of Contents

EXECUTIVE SUMMARY	1
1. INTRODUCTION	9
1.1. Background	9
1.2. Proposed Development.....	9
1.3. Objectives	10
1.4. Scope of Works.....	10
1.5. Limitations	10
1.6. Confidentiality.....	11
2. GROUND INVESTIGATION.....	12
2.1. General Overview	12
2.2. Limitations of the Investigation	12
2.3. Scope of Investigation.....	12
2.4. In-Situ Standard Penetration Testing (SPT).....	13
2.5. Laboratory Analysis.....	13
3. GROUND AND GROUNDWATER CONDITIONS	14
3.1. Summary of Ground Conditions	14
3.2. Made Ground	14
3.3. Drift Deposits	15
3.4. Solid Geology.....	15
3.5. Groundwater	15
3.6. Visual and Olfactory Evidence of Contamination	15
3.7. Soil Consistency	15
3.8. Side Stability and Ease of Excavation	15
3.9. Soil Density/Moisture Content Relationship	20
3.10. Point Load Tests.....	20
3.11. Unconfined Compressive Strength.....	22
pH and Sulphate.....	23
4. TIER I QUALITATIVE CONTAMINATED LAND RISK ASSESSMENT	24
4.1. Human Health Risk Assessment.....	24
4.2. Controlled Waters Risk Assessment.....	28
4.2.1. Controlled Water Risk Assessment and Mitigation	33
4.2.2. Discussion of Controlled Waters Risk Assessment	33
4.3. Ground Gas	34
4.1. Investigation Rationale.....	34
4.2. Monitoring Methodology.....	35
4.2.1. Summary of Monitoring Results	35
4.2.2. Sources of Ground Gas	37
4.2.3. Groundwater	37
4.2.4. Gas Flow.....	37
4.2.5. Gas Concentrations	37
4.2.6. Gas Assessment.....	37
4.3. Potable Water Supply	38
4.4. Conceptual Site Model	39
5. GEOTECHNICAL ASSESSMENT	44
5.1. Proposed Development.....	44
5.2. Summary of Ground Conditions	44
5.3. Site Preparation	44
5.4. Foundation Conditions and Assessment of Potential Bearing Capacities	45
5.5. Ground Floor Slabs	46



5.6.	Heave Precautions	46
5.7.	Highways Construction	46
5.8.	Drainage	47
5.9.	Concrete Durability	47
5.10.	Excavations	47
5.11.	Construction Activity and Inspection	48
5.12.	Geotechnical Risk Register	49
5.13.	Further Works	51
6.	CONCLUSIONS AND RECOMMENDATIONS	52
6.1.	Contaminated Land Assessment	52
6.2.	Geotechnical Assessment	53
APPENDIX I LIMITATIONS		54
APPENDIX II GLOSSARY		56
APPENDIX III DRAWINGS		59
APPENDIX IV PHOTOGRAPHS		61
APPENDIX V E3P EXPLORATORY HOLE LOGS		65
APPENDIX VI CHEMICAL TESTING RESULTS		66
APPENDIX VII ORIGIN OF TIER I GENERIC ASSESSMENT CRITERIA		67
APPENDIX VIII GEOTECHNICAL TESTING CERTIFICATES		69

DRAWING LIST

14-261-001 - Site Location Plan
14-261-002 - Proposed Development Plan
14-261-003 - Historical Features Plan
14-261-004 - Site Features Plan
14-261-005 - Exploratory Hole Location Plan
14-261-006 - Depth of Made Ground Plan
14-261-008 - Depth to Founding Strata Plan
14-261-010 - Conceptual Site Model
14-261-012 - Depth to Bedrock Plan
14-261-018 - Contamination Issues Plan-Human Health
14-261-019 - Contamination Issues Plan-Controlled Waters
14-261-023 - Foundation Pit Details
14-261-025 - Wall Core Details



1. INTRODUCTION

1.1. BACKGROUND

E3P has been commissioned by Property Alliance Group to undertake a detailed Phase II Geoenvironmental Site Assessment for a parcel of land at Renaissance, Deansgate, Manchester.

This report is required to determine potential contaminated land liabilities, remediation requirements and geotechnical engineering works that will be required as part of the proposed development for a proposed low-rise residential development.

1.2. PROPOSED DEVELOPMENT

E3P understands that the proposed development will comprise offices and residential apartments with associated car parking.

A snapshot of the proposed development layout is indicated in Figure 1.1.

FIGURE 1.1 SNAPSHOT OF PROPOSED DEVELOPMENT



1.3. OBJECTIVES

The objectives of the geoenvironmental assessment are as follows:

- ✦ Review historical plans, geology, hydrogeology, site sensitivity, floodplain issues, mining records and any local authority information available in order to complete a desk study in line with Environment Agency (EA) document *Land Contamination: Risk Management (LCRM) (2019)*.
- ✦ Undertake a preliminary stage of sampling and analysis to provide an overview of environmental issues identified.
- ✦ Assess the implications of any potential environmental risks, liabilities and development constraints associated with the site in relation to the future use of the site and in relation to off-site receptors.
- ✦ Assess the geotechnical information and provide preliminary recommendations in relation to foundations, pavement construction and floor slabs.
- ✦ Provide recommendations regarding future works required.

1.4. SCOPE OF WORKS

The scope of work includes the following elements:

- ✦ Design of suitable intrusive ground investigation;
- ✦ Rotary boreholes;
- ✦ Mechanically excavated trial pits;
- ✦ Wall cores;
- ✦ In-situ geotechnical testing;
- ✦ Chemical and geotechnical laboratory analysis;
- ✦ Groundwater monitoring and sampling;
- ✦ Ground gas monitoring;
- ✦ Contamination risk assessment and conceptual site model;
- ✦ Geotechnical assessment and interpretation; and
- ✦ Factual and interpretive reporting.

1.5. LIMITATIONS

The limitations of this report are presented in Appendix I.



1.6. CONFIDENTIALITY

E3P has prepared this report solely for the use of the client and those parties with whom a warranty agreement has been executed, or with whom an assignment has been agreed. Should any third party wish to use or rely upon the contents of the report, written approval must be sought from E3P; a charge may be levied against such approval.



2. GROUND INVESTIGATION

2.1. GENERAL OVERVIEW

A ground investigation has been designed based on the findings of the E3P desk study, with exploratory holes advanced to target specific potential contaminant sources. The investigation has also been used to collect geotechnical information to assist in the design and construction of the proposed development.

Exploratory fieldwork was completed between 19th February and 26th February 2021. The works are summarised in Table 2.1.

2.2. LIMITATIONS OF THE INVESTIGATION

Access was limited by the existing buildings on site.

2.3. SCOPE OF INVESTIGATION

TABLE 2.1 SUMMARY OF FIELDWORK

POTENTIAL SOURCE/RATIONALE	LOCATION HOLE	TYPE	MAXIMUM DEPTH (m bgl)	MONITORING WELLS RESPONSE ZONE (m bgl)
General Ground Conditions/ To investigate the existing foundations in the south.	TP101	Mechanically Excavated Trial Pit	0.80	N/A
	TP102		0.70	N/A
	TP103		0.80	N/A
	TP104		0.80	N/A
To investigate the depth and nature of the bedrock and to provide detailed geotechnical information. To permit the installation of deep groundwater monitoring wells.	RBH101	Rotary Borehole	10.00	2.0–10.0
	RBH102		10.00	0.5–1.5
	RBH103		10.00	2.0–10.0
	RBH104		10.00	2.0–10.0
	RBH105		10.00	2.0–10.0
	RBH105		10.00	2.0–10.0
To establish the thickness of the brick wall/concrete retaining wall.	WC101	Wall Core	1.50	N/A
	WC102		0.20	N/A

Mechanically excavated trial pits were advanced to investigate the current footings for the building.

The series of rotary boreholes were advanced to investigate the depth and nature of the underlying bedrock, to complete detailed geotechnical testing and to permit the installation of deep groundwater monitoring wells.

Two concrete cores were completed through the brick wall and concrete retaining wall in the east of the site. The full thickness of the concrete retaining wall could not be determined due to the presence of a rubber membrane. The findings are detailed on Drawing 14-261-025 (Appendix III).



The sampling locations are illustrated in Drawing 14-261-005 (Appendix III). The ground conditions encountered are indicated on the logs, which are provided in Appendix V.

Return visits were made to monitor installations for groundwater level and gas concentrations. In addition, selected wells were purged and samples of groundwater recovered for chemical analysis.

2.4. IN-SITU STANDARD PENETRATION TESTING (SPT)

In-situ geotechnical testing was conducted using the standard penetration test (SPT) and, where the ground is granular, a 60° cone (SPT(C)) was used instead of the sampling tube. The results are shown in the probehole logs in Appendix V and presented in Table 3.2 and discussed in Section 5.

2.5. LABORATORY ANALYSIS

Selected soil samples were submitted for a range of chemical analysis comprising:

- ✦ Metals.
- ✦ pH, total sulphate, water-soluble sulphate (2:1 extract).
- ✦ Sulphide.
- ✦ Cyanide.
- ✦ Phenols.
- ✦ Total and speciated polycyclic aromatic hydrocarbons (PAHs).
- ✦ Asbestos identification and quantification.
- ✦ Banded total petroleum hydrocarbon (TPH).

I2 Analytical undertook the analytical work and the testing results are included in Appendix VI and discussed in Section 4.

Selected samples were submitted to PSL Laboratory where the following geotechnical tests were undertaken:

- ✦ Dry density/moisture content relationship under 4.5 kg compaction;
- ✦ Point load tests; and
- ✦ Unconfined compressive strength.

Laboratory analysis sheets are included in Appendix VIII and are summarised in Section 9.



3. GROUND AND GROUNDWATER CONDITIONS

3.1. SUMMARY OF GROUND CONDITIONS

The ground investigation generally confirms the published geology and identifies the strata set out in Table 3.1.

TABLE 3.1 SUMMARY OF STRATA

HOLE	DEPTH TO STRATUM (m bgl)			
	MADE GROUND CONCRETE	MADE GROUND	SAND (WEATHERED BEDROCK)	BEDROCK
TP101	0.00–0.35	0.35–0.70	0.70–0.80	–
TP102	0.00–0.35	0.35–0.70	–	–
TP103	0.00–0.35	0.35–0.70	0.70–0.80	–
TP104	0.00–0.35	0.35–0.70	0.70–0.80	–
RBH101	0.00–0.25 0.27–0.35	0.25–0.27	0.35–1.50	1.50–>10.00
RBH102	0.00–0.35	0.35–1.50	–	1.50–>10.00
RBH103	0.00–0.25 0.27–0.33	0.25–0.27 0.33–0.70	–	0.70–>10.00
RBH104	0.00–0.25 0.27–0.35	0.25–0.27 0.35–0.80	–	0.80–>10.00
RBH105	0.00–0.35	0.35–0.45	–	0.45–>10.00
RBH106	0.00–0.26 0.28–1.50	0.26–0.28	–	1.50–>10.00

Note: The bedrock will be weathered and the actual depth can only be profiled after the post demolition ground investigation.

3.2. MADE GROUND

Made Ground deposits were encountered within all exploratory hole locations to a maximum proven depth of 1.50 m bgl.

Made Ground deposits generally comprised concrete to circa 0.35 m bgl underlain by grey sandy gravel of limestone (Type 1 MOT). In addition, RBH102 identified a brick wall between 0.70 m and 1.50 m bgl. RBH104 identified a brick wall between 0.35 m and 0.80 m bgl.

TP101-TP104 identified concrete with a rubber membrane over brown gravelly fine to medium sand with concrete and brick to 0.70 m bgl.

There is the potential for deep Made Ground in the location of the former quarry.

A Depth of Made Ground Plan is presented as Drawing 14-261-006 in Appendix III.



3.3. DRIFT DEPOSITS

Drift deposits were not encountered during the ground investigation. There is the potential for drift deposits to be present in areas that have not been investigated to date.

3.4. SOLID GEOLOGY

The solid bedrock geology was encountered between 0.45 m and 10.00 m bgl. The solid geology comprises dense to very dense SANDSTONE. The bedrock will be weathered and the actual depth can only be profiled after the post demolition ground investigation.

Weathered sandstone bedrock was encountered as reddish brown medium SAND between 0.35 m and 1.50 m bgl in RBH101 and between 0.70 m and 0.80 m bgl in TP101, TP103 and TP104.

A former quarry is present in the centre of the site, therefore there is the potential for notable changes in the depth of bedrock.

3.5. GROUNDWATER

Groundwater strikes were not encountered during the ground investigation. Subsequent monitoring recorded groundwater between 1.40 and 3.68 m bgl.

Monitoring was undertaken using an electronic dip meter and interface probe to record the depth to groundwater and the thickness of any free-phase hydrocarbon product, if present. These results are summarised in Table 4.7.

3.6. VISUAL AND OLFACTORY EVIDENCE OF CONTAMINATION

Visual and olfactory evidence of potential contamination has not been identified during the site investigation.

3.7. SOIL CONSISTENCY

Results of the standard penetration tests, including undrained shear strengths derived from SPTs are included in Table 3.2.

3.8. SIDE STABILITY AND EASE OF EXCAVATION

The sides of the exploratory trial pit excavations appeared to be stable during excavation.

The presence of brick and concrete cobbles within the Made Ground deposits meant that in certain places, excavation was slow through the Made Ground. The natural sand (weathered bedrock) was excavated with relative ease.

3.9. ROTARY CORE INTO RETAINING WALL FINDINGS

WC101 went through 300 mm of the brick wall and then a service void to 1.30 m bgl and then 200 mm into the concrete retaining wall. The core could not penetrate the water membrane within the concrete retaining wall.

WC102 was cored through a service void and then 200 mm into the concrete retaining wall. The core could not penetrate the water membrane within the concrete retaining wall.



3.10. TRIAL PIT EXCAVATION FINDINGS

TP101, TP103 and TP104 identified the foundation slab within the SANDSTONE from 700 mm, the full depth was not determined.

TP102 identified the foundation slab from 400 mm to 700 mm within the Made Ground



TABLE 3.2 STANDARD/CONE PENETRATION TEST RESULTS

BOREHOLES	DEPTH (m bgl)	MATERIAL FIELD DESCRIPTION	CPT/SPT "N" VALUE	CORRECTED "N" VALUE (N ₁) ₆₀	TERZAGHI & PECK RELATIVE DENSITY (SANDS)	EUROCODE SOIL STRENGTH	CONSISTENCY (BS 5930)	TERZAGHI & PECK APPROXIMATE UNDRAINED SHEAR STRENGTH (kN/m ²)	ALLOWABLE BEARING PRESSURE (kN/m ²)*
RBH101	1.00	SAND	50	50.41	Very Dense	N/A	N/A	N/A	504.07
	2.00	SANDSTONE	46	42.02	Dense	N/A	N/A	N/A	420.23
	3.00	SANDSTONE	50	43.48	Dense	N/A	N/A	N/A	434.83
	4.00	SANDSTONE	50	42.24	Dense	N/A	N/A	N/A	422.43
	5.00	SANDSTONE	50	41.48	Dense	N/A	N/A	N/A	414.81
	6.00	SANDSTONE	50	40.99	Dense	N/A	N/A	N/A	409.94
RBH102	2.00	SANDSTONE	50	45.68	Dense	N/A	N/A	N/A	456.77
	3.00	SANDSTONE	50	43.48	Dense	N/A	N/A	N/A	434.83
	4.00	SANDSTONE	50	42.24	Dense	N/A	N/A	N/A	422.43
	5.00	SANDSTONE	50	41.48	Dense	N/A	N/A	N/A	414.81
	6.00	SANDSTONE	50	40.99	Dense	N/A	N/A	N/A	409.94
	7.00	SANDSTONE	50	40.68	Dense	N/A	N/A	N/A	406.78
	8.00	SANDSTONE	50	40.47	Dense	N/A	N/A	N/A	404.73
RBH103	1.00	SANDSTONE	50	50.41	Very Dense	N/A	N/A	N/A	504.07
	2.00	SANDSTONE	50	45.68	Dense	N/A	N/A	N/A	456.77
	3.00	SANDSTONE	50	43.48	Dense	N/A	N/A	N/A	434.83
	4.00	SANDSTONE	50	42.24	Dense	N/A	N/A	N/A	422.43
RBH104	1.00	SANDSTONE	50	50.41	Very Dense	N/A	N/A	N/A	504.07



Renaissance, Deansgate

Phase II Geoenvironmental Site Assessment

May 2021

BOREHOLES	DEPTH (m bgl)	MATERIAL FIELD DESCRIPTION	CPT/SPT "N" VALUE	CORRECTED "N" VALUE (N ₁) ₆₀	TERZAGHI & PECK RELATIVE DENSITY (SANDS)	EUROCODE SOIL STRENGTH	CONSISTENCY (BS 5930)	TERZAGHI & PECK APPROXIMATE UNDRAINED SHEAR STRENGTH (kN/m ²)	ALLOWABLE BEARING PRESSURE (kN/m ²)*
RBH104	2.00	SANDSTONE	50	45.68	Dense	N/A	N/A	N/A	456.77
	3.00	SANDSTONE	50	43.48	Dense	N/A	N/A	N/A	434.83
	4.00	SANDSTONE	50	42.24	Dense	N/A	N/A	N/A	422.43
	5.00	SANDSTONE	50	41.48	Dense	N/A	N/A	N/A	414.81
	6.00	SANDSTONE	50	40.99	Dense	N/A	N/A	N/A	409.94
	7.00	SANDSTONE	50	40.68	Dense	N/A	N/A	N/A	406.78
RBH105	3.00	SANDSTONE	50	43.48	Dense	N/A	N/A	N/A	434.83
	4.00	SANDSTONE	50	42.24	Dense	N/A	N/A	N/A	422.43
	6.00	SANDSTONE	50	40.99	Dense	N/A	N/A	N/A	409.94
	7.00	SANDSTONE	50	40.68	Dense	N/A	N/A	N/A	406.78
	8.00	SANDSTONE	50	40.47	Dense	N/A	N/A	N/A	404.73
RBH106	1.00	SANDSTONE	50	50.41	Very Dense	N/A	N/A	N/A	504.07
	2.80	SANDSTONE	50	43.82	Dense	N/A	N/A	N/A	438.21
	3.80	SANDSTONE	50	42.44	Dense	N/A	N/A	N/A	424.43
	4.50	SANDSTONE	50	41.82	Dense	N/A	N/A	N/A	418.18
	5.40	SANDSTONE	50	41.26	Dense	N/A	N/A	N/A	412.61
	6.20	SANDSTONE	50	40.92	Dense	N/A	N/A	N/A	409.20
	7.20	SANDSTONE	50	40.63	Dense	N/A	N/A	N/A	406.30



Renaissance, Deansgate

Phase II Geoenvironmental Site Assessment

May 2021

BOREHOLES	DEPTH (m bgl)	MATERIAL FIELD DESCRIPTION	CPT/SPT "N" VALUE	CORRECTED "N" VALUE (N ₁) ₆₀	TERZAGHI & PECK RELATIVE DENSITY (SANDS)	EUROCODE SOIL STRENGTH	CONSISTENCY (BS 5930)	TERZAGHI & PECK APPROXIMATE UNDRAINED SHEAR STRENGTH (kN/m ²)	ALLOWABLE BEARING PRESSURE (kN/m ²)*
RBH106	8.20	SANDSTONE	50	40.44	Dense	N/A	N/A	N/A	404.42
	9.00	SANDSTONE	50	40.34	Dense	N/A	N/A	N/A	403.42

NOTES

* The Allowable Bearing Pressure (ABP) should be considered indicative.

The interpretation of in situ mass undrained shear strength (cu) data from SPT Blow Count (N) results and the influence of the Plasticity Index (PI) was reported in Standard Penetration Test in Insensitive Clays and Soft Rocks. Stroud (1974). The standard penetration test and the engineering properties of glacial materials subsequently. Stroud and Butler (1975) and (1989).

Allowable bearing pressure on sands. Soil Mechanics in Engineering Practice Terzaghi, K. & Peck, R.B. 1996.



3.11. SOIL DENSITY/MOISTURE CONTENT RELATIONSHIP

Dry density / moisture content relationship analysis has been conducted on soils using via utilising proctor compaction tests utilising a 4.5 kg rammer. The results of the tests have been summarised in Table 3.3. The full test results can be found in Appendix VIII.

TABLE 3.3 SUMMARY DRY DENSITY AND MOISTURE CONTENT

LOCATION	LABORATORY DESCRIPTION	TOP DEPTH (m)	METHOD OF COMPACTION	INITIAL MOISTURE CONTENT (%)	OPTIMUM MOISTURE CONTENT (%)	MATERIAL RETAINED ON 37.5 mm SIEVE (%)	MAX DRY DENSITY (mg/m ³)	MATERIAL RETAINED ON 20.0 mm TEST SIEVE (%)
RBH101	Brown gravelly slightly clayey silty SAND.	0.80	4.5 kg	22	12	0	1.89	0

The proctor compaction tests have indicated that the material in RBH101 is wet of the optimum. It should be noted that if this material is excavated for use in a cut/fill operation careful consideration should be taken in the stabilisation of this material.

Engineering of this type of material will need to be completed during dry weather periods only.

3.12. POINT LOAD TESTS

Point index load tests were performed on samples of sandstone obtained from the rotary boreholes advanced across site to assess the suitability of the sandstone bedrock. The results of which are presented within Appendix VIII and are summarised in Table 3.4.

TABLE 3.4 SUMMARY OF POINT LOAD TEST DATA

LOCATION	DEPTH (m)	TEST TYPE	ORIENTATION	FAILURE LOAD (kN)	UNCORRECTED POINT LOAD STRENGTH INDEX (Is) - MPa	POINT LOAD STRENGTH INDEX (Is50) - MPa
RBH101	2.30	A	Perpendicular	0.21	0.04	0.04
RBH101	6.28	A	Perpendicular	1.01	0.18	0.22
RBH101	7.47	A	Perpendicular	1.43	0.26	0.31
RBH101	8.82	A	Perpendicular	0.99	0.16	0.20
RBH101	6.71	A	Perpendicular	0.81	0.18	0.20
RBH102	7.23	A	Perpendicular	1.59	0.27	0.33
RBH102	1.86	A	Perpendicular	0.97	0.18	0.21
RBH102	8.82	A	Perpendicular	0.77	0.16	0.18
RBH102	9.65	A	Perpendicular	0.69	0.12	0.15



LOCATION	DEPTH (m)	TEST TYPE	ORIENTATION	FAILURE LOAD (kN)	UNCORRECTED POINT LOAD STRENGTH INDEX (Is) - MPa	POINT LOAD STRENGTH INDEX (Is50) - MPa
RBH102	9.30	A	Perpendicular	0.48	0.10	0.11
RBH102	8.64	A	Perpendicular	1.12	0.30	0.33
RBH103	1.50	A	Perpendicular	1.59	0.38	0.43
RBH103	3.40	A	Perpendicular	2.01	0.32	0.40
RBH103	8.60	A	Perpendicular	0.84	0.18	0.21
RBH104	2.43	A	Perpendicular	0.47	0.10	0.11
RBH104	3.36	A	Perpendicular	1.45	0.29	0.34
RBH104	5.60	A	Perpendicular	0.83	0.19	0.21
RBH104	7.26	A	Perpendicular	2.06	0.40	0.47
RBH105	1.10	A	Perpendicular	0.63	0.13	0.15
RBH105	5.00	A	Perpendicular	1.46	0.34	0.38
RBH105	6.80	A	Perpendicular	1.12	0.20	0.24
RBH105	9.73	A	Perpendicular	1.45	0.25	0.31
RBH106	3.10	A	Perpendicular	2.62	0.39	0.48
RBH106	3.37	A	Perpendicular	0.60	0.18	0.19
RBH106	5.40	A	Perpendicular	0.99	0.22	0.25
RBH106	7.20	A	Perpendicular	1.23	0.29	0.33
RBH106	9.80	A	Perpendicular	0.93	0.18	0.21
RBH101	2.30	D	Parallel	0.33	0.043	0.05
RBH101	6.28	D	Parallel	0.72	0.093	0.12
RBH101	7.47	D	Parallel	1.09	0.141	0.18
RBH101	8.82	D	Parallel	0.69	0.089	0.11
RBH101	6.71	D	Parallel	0.68	0.086	0.11
RBH102	7.23	D	Parallel	0.73	0.094	0.12
RBH102	1.86	D	Parallel	0.85	0.118	0.15
RBH102	8.82	D	Parallel	0.54	0.070	0.09



LOCATION	DEPTH (m)	TEST TYPE	ORIENTATION	FAILURE LOAD (kN)	UNCORRECTED POINT LOAD STRENGTH INDEX (Is) - MPa	POINT LOAD STRENGTH INDEX (Is50) - MPa
RBH102	9.65	D	Parallel	0.45	0.057	0.07
RBH102	9.30	D	Parallel	0.48	0.065	0.08
RBH102	8.64	D	Parallel	1.28	0.162	0.21
RBH103	1.50	D	Parallel	1.06	0.134	0.17
RBH103	3.40	D	Parallel	1.11	0.140	0.18
RBH103	8.60	D	Parallel	1.10	0.139	0.18
RBH104	2.43	D	Parallel	0.41	0.057	0.07
RBH104	3.36	D	Parallel	1.01	0.130	0.17
RBH104	5.60	D	Parallel	0.76	0.100	0.13
RBH104	7.26	D	Parallel	1.44	0.190	0.24
RBH105	1.10	D	Parallel	0.43	0.056	0.07
RBH105	5.00	D	Parallel	0.33	0.048	0.06
RBH105	6.80	D	Parallel	0.61	0.077	0.10
RBH105	9.73	D	Parallel	1.51	0.204	0.26

The results of the point load tests indicate that at a depth of between 1.10–9.73 m bgl the sandstone bedrock recorded a strength of between 0.05 and 0.48 (MPa) which equates to 50–480 kN/m².

3.13. UNCONFINED COMPRESSIVE STRENGTH

An unconfined compressive strength test was performed on a sample of sandstone obtained from RBH103. The results of which are presented within Appendix VIII and are summarised in Table 3.5.

TABLE 3.5 SUMMARY OF UNCONFINED COMPRESSIVE STRENGTH

LOCATION	DEPTH (m)	INITIAL MASS (g)	Bulk Density (Mg/m)	Moisture Content (%)	Dry Density (Mg/m)	Load Failure (kN)	UCS (MPa)	Failure Mode
RBH103	6.63-6.98	1840	2.19	15	1.91	20.1	3.3	Brittle

The results indicate that at a depth of between 6.63-6.98 m bgl the sandstone recorded a strength of 3.3 (MPa) which equates to 3300 kN/m².



3.14. pH AND SULPHATE

Chemical analyses for pH and soluble sulphate content contained in Appendix VI (summarised in Table 3.6), shows that the soils at the site meet Class DS-1, Aggressive Chemical Environment for Concrete Classification (ACEC) AC-1s in accordance with BRE *Special Digest 1* (2005).

TABLE 3.6 SUMMARY OF pH AND SULPHATE DATA

LOCATION	DEPTH (m)	SO ₄ IN 2:1 WATER/SOIL (g/l)	pH VALUE	CLASSIFICATION
TP101	0.40	0.031	11.5	DS-1, AC-1s
TP102	0.40	0.0047	12.3	
TP103	0.45	0.077	11.2	
TP104	0.45	0.027	11.3	
RBH101	0.80	0.014	9.2	
RBH102	0.60	0.015	12.4	
RBH103	0.80	0.083	9.2	
RBH103	0.40	0.011	12.3	
RBH104	0.30	0.42	7.8	
RBH104	0.90	0.0095	9.1	
RBH105	0.30	0.02	11.5	
RBH105	0.50	0.014	9.5	
RBH106	0.35	0.017	11.7	



4. TIER I QUALITATIVE CONTAMINATED LAND RISK ASSESSMENT

E3P has undertaken a Tier 1 qualitative risk assessment to determine if any potential contaminants within the underlying soils and groundwater pose an unacceptable level of risk to the identified receptors.

4.1. HUMAN HEALTH RISK ASSESSMENT

At Tier 1 stage, the long term (chronic) human health toxicity of the soil has been assessed by comparing the on-site concentrations of organic and inorganic compounds with reference values published in LQM/CIEH S4UL (S4UL3267).

The results of this comparison have been summarised within Table 4.1.



TABLE 4.1 SUMMARY OF INORGANIC AND HYDROCARBON TOXICITY ASSESSMENT FOR A RESIDENTIAL END USE WITHOUT PLANT UPTAKE

DETERMINANT	UNIT	GAC	N	MC	LOC. OF EX	PAT H-WAY	ASSESSMENT
Arsenic	mg/kg	40	13	3.9	-	1	No Further Action
Cadmium	mg/kg	85	13	0.6	-	1	No Further Action
Chromium (VI)	mg/kg	6	13	<4.0	-	1	No Further Action
Lead	mg/kg	200	13	16	-	1	No Further Action
Mercury	mg/kg	1.2	13	<0.3	-	3	No Further Action
Nickel	mg/kg	180	13	11	-	1	No Further Action
Selenium	mg/kg	430	13	<1.0	-	1	No Further Action
Copper	mg/kg	7100	13	30	-	1	No Further Action
Zinc	mg/kg	40000	13	65	-	1	No Further Action
Cyanide – Total	mg/kg	791	13	<1.0	-	1	No Further Action
Phenols – Total	mg/kg	210	13	<1.0	-	1	No Further Action
Asbestos	Fibres	NFD	13	<0.001 %	TP104 0.45 m	3	Further Action
Naphthalene	mg/kg	2.3	13	<0.05	-	4	No Further Action
Acenaphthylene	mg/kg	2900	13	<0.05	-	2	No Further Action
Acenaphthene	mg/kg	3000	13	<0.05	-	1	No Further Action
Fluorene	mg/kg	2800	13	<0.05	-	1	No Further Action
Phenanthrene	mg/kg	1300	13	0.4	-	2	No Further Action
Anthracene	mg/kg	31000	13	<0.05	-	2	No Further Action
Fluoranthene	mg/kg	1500	13	0.44	-	2	No Further Action
Pyrene	mg/kg	3700	13	0.42	-	2	No Further Action
Benzo(a)Anthracene	mg/kg	11	13	0.33	-	2	No Further Action
Chrysene	mg/kg	30	13	0.23	-	2	No Further Action
Benzo(b)Fluoranthene	mg/kg	3.9	13	<0.05	-	2	No Further Action
Benzo(k)Fluoranthene	mg/kg	110	13	<0.05	-	2	No Further Action
Benzo(a)Pyrene	mg/kg	3.2	13	<0.05	-	2	No Further Action
Indeno(123-cd)Pyrene	mg/kg	45	13	<0.05	-	2	No Further Action
Dibenzo(a,h)Anthracene	mg/kg	0.31	13	<0.05	-	2	No Further Action
Benzo(ghi)Perylene	mg/kg	360	13	<0.05	-	2	No Further Action
TPH C5-C6 (aliphatic)*	mg/kg	42	13	<1.0	-	4	No Further Action
TPH C6-C8 (aliphatic)*	mg/kg	100	13	<0.1	-	4	No Further Action
TPH C8-C10 (aliphatic)*	mg/kg	27	13	<0.1	-	4	No Further Action
TPH C10-C12 (aromatic)*	mg/kg	250	13	<2.0	-	4	No Further Action
TPH C12-C16 (aromatic)*	mg/kg	1800	13	<4.0	-	4	No Further Action
TPH C16-C21 (aromatic)*	mg/kg	1900	13	16	-	1	No Further Action



DETERMINANT	UNIT	GAC	N	MC	LOC. OF EX	PAT H-WAY	ASSESSMENT
TPH C21-C35 (aromatic)*	mg/kg	1900	13	51	-	1	No Further Action

Notes

PL1 = soil ingestion, PL2 = dermal contact and ingestion, PL3 = dust inhalation; PL4 = Vapour/Gas Inhalation; PL5 = Vertical / Lateral Migration; PL6 = Corrosion of concrete; PL7=Tainting of water supply; PL8 = Uptake by plants

Abbreviations: GAC = general assessment criteria, n = number of samples, MC = maximum concentration; Loc of Ex = location of exceedance; NFD = no fibres detected.

* The Tier 1 GAC for the hydrocarbon fraction is derived from the CIEH assessment for petroleum hydrocarbons Criteria Working Group (CWG) for both aliphatic and aromatic compounds. E3P has utilised the Tier 1 values for aliphatic compounds for the volatile and semi volatile fractions (C5-C12) and the Tier 1 values for aromatic compound for the non-volatile fractions (C12-C35). The comparison of a total (aliphatic/aromatic) compounds to an individual fraction is considered to be a conservative approach and satisfactory for the protection of human health.

Referring to Table 4.1, the results of this direct comparison indicates that the data exceeds the screening criteria for a residential end use for the following contaminant:

 Chrysotile.

Asbestos in the form of loose chrysotile fibres has been identified in the granular Made Ground in TP104 at <0.001 %.

In relation to this exceedance, the following can be determined:

 The main exposure pathway is:

- Fibre/dust inhalation.

 The exceedance for asbestos is associated with shallow Made Ground deposits in TP104.

Samples of the Made Ground in TP101 at 0.65 m and TP103 at 0.45 m were compared to the Waste Acceptance Criteria. The WAC analysis suggests that the soils would be classified as stable non-reactive. A WM3 waste assessment is still required to confirm the waste classification but based on an initial review of the available data, any soil arisings are likely to be inert.

HUMAN HEALTH RISK ASSESSMENT AND MITIGATION

No visual signs of ACM were encountered during the ground investigation; it is therefore likely that only trace fibres are present. Impacted soils should be managed according to the asbestos risk mitigation conceptual site model shown in Figure 4.1.

The installation of a suitable cover system in all landscaping and public open space will remove any potential for direct exposure to impacted soils.

The specific design and installation process for the appropriate cover systems should be defined within a site remediation and enabling works strategy.



FIGURE 4.1 ASBESTOS RISK MITIGATION CONCEPTUAL SITE MODEL



Notes

ND None Detect

0.001% Soils may contain $\leq 0.001\%$ asbestos using composite testing to ensure there is no potential risk to human health. This value is present within areas where there may be a short term low level exposure of soils containing trace asbestos fibres by construction workers where an appropriate level of asbestos management is employed (dust suppression)

0.1% Soils at a depth of $>1.00\text{m}$ bgl may contain $<0.1\%$ asbestos using composite testing where they will not be likely to be disturbed in the future and will therefore be in an area of low sensitivity. Risk assessment completed in accordance with Asbestos JIWG risk assessment tools.

Undefined- this will be dependent upon soils encountered during earthworks, which may be placed at these depths to ensure no potential risk to human health.

Chemical analysis of the natural granular deposits has identified these soils to be acceptable for use as subsoil within the proposed landscaped areas; however, further chemical validation samples will be required to confirm this. There are no suitable sources of topsoil available on the site.

Further post demolition ground investigation will be required to confirm the absence of any significant contamination.



4.2. CONTROLLED WATERS RISK ASSESSMENT

E3P has undertaken a controlled waters risk assessment for the site based on the consideration of the conceptual site model and the sensitive receptors which are summarised in Table 4.2.

TABLE 4.2 CONTROLLED WATERS CONCEPTUAL MODEL AND SENSITIVITY PROFILE

DISCUSSION		SENSITIVITY RATING
Contaminant Source		
Made Ground Made Ground infill material from historical construction and demolition activities is present. No significant contamination has been identified, with the exception of asbestos in TP104.		Low
Historic Copper Roller Works, Cotton Finishing Works, Mills It is unlikely that the former works and mills are a potential source as the land uses were historical.		Low
Pathway		
Vertical Migration Due to the majority of the site being underlain by shallow sandstone bedrock, vertical migration of contaminants is likely to occur as there are no drift deposits overlying the bedrock.		High
Lateral migration Lateral migration of contaminants is considered possible due to the presence of shallow bedrock across the site.		High
Receptor		
Aquifer Classification in Superficial Drift Deposits	Secondary A aquifer (drift deposits appear to be absent).	Low
Aquifer Classification in Bedrock	Principal aquifer.	High
Groundwater Source Protection Zone or Drinking Water Safeguard Zone	The site is not affected.	Low
Distance to the Closest Groundwater Abstraction Point	There is a groundwater abstraction point located 65 m north west of the site licensed to British Telecoms Plc for "Other industrial/commercial/public services: general cooling (existing licenses only) (High Loss)". The closest potable abstraction is 507 m north.	Medium
Is the Site Located Within 50 m of a Surface Watercourse?	The River Irwell is located 5 m west of the site and forms the western boundary. A culvert is present in the south west corner of the site.	High
The ICSM developed within the context of the site setting has identified viable pollutant pathways, which would be the downward migration of potentially mobile phase-soluble contaminants towards the underlying principal aquifer and the lateral migration towards the River Irwell.		



To ensure a robust appraisal of the identified risk to controlled waters, E3P has identified the sources of potential contamination that represent a risk to controlled waters from the initial CSM, we have then assessed the availability of ground investigation data in the form of analysis of the solid phase (soil) and dissolved phase within the perched groundwater or aquifer. The results of this assessment are presented in Table 4.3.

TABLE 4.3 QUALITATIVE RISK TO CONTROLLED WATERS FROM SOIL ANALYTICAL RESULTS

CONTAMINANT	ASSESSMENT RATING	DISCUSSION
BTEX > 1 mg/kg	The soil data analysis has not identified any TPH C5 to C6 that might otherwise be indicative of VOC impact.	None
Total VOC > 1 mg/kg		
Total SVOC > 1 mg/kg	As above.	None
C5-C10 > 5 mg/kg	All concentrations are below the laboratory LOD.	None
C10-C12 > 10 mg/kg	All concentrations are below the laboratory LOD.	None
C12-C16 > 50 mg/kg	All concentrations are below the laboratory LOD.	None
Phenols > 2 mg/kg	All concentrations are below the laboratory LOD.	None
Naphthalene > 2 mg/kg	All concentrations are below the laboratory LOD.	None
Total PAH > 10 mg/kg	Total concentrations of low-solubility PAH compounds greater than 10 mg/kg have not been detected.	None
PCB > 1 mg/kg	No potential sources of PCB have been identified.	None
Heavy metals > 500 mg/kg	Concentrations of heavy metals above 500 mg/kg have not been recorded.	None

The Tier I assessment has included a comparison of leachate analysis from a sample of the Made Ground and groundwater to drinking water standards and environmental quality standards (EQS).

These are presented in Table 4.4.



TABLE 4.4 COMPARISON OF GROUNDWATER AND LEACHATE ANALYSIS WITH TIER 1 SCREENING LEVELS

DETERMINAND	UNIT	EQS ^{1,2,3}	DWS ^{3,4,5}	NO. OF GW SAMPLES	MAX CONC. IN GROUNDWATER	LOCATION OF EXCEEDANCE	NO. OF LEACHATE SAMPLES	MAX CONC. IN LEACHATE	LOCATION OF EXCEEDANCE	ASSESSMENT
		AA								
Arsenic	µg/l	50	10	3	2.93	-	1	<1.0		No Further Action
Cadmium	µg/l	0.08-0.25	5	3	0.03	-	1	<0.08		No Further Action
Chromium (VI)	µg/l	3.4	-	3	-	-	1	11	TP101 0.4 m	Further Action
Chromium (III)	µg/l	4.7	50	3	3.8	-	1	12	TP101 0.4 m	Further Action
Copper	µg/l	1	2000	3	8.4 3.1 2.9	RBH104 RBH101 RBH105	1	14	TP101 0.4 m	Further Action
Total Cyanide	µg/l	1	50	3	<1.0	-	1	<1.0	-	No Further Action
Lead	µg/l	1.2	10	3	0.2	-	1	1.2	-	No Further Action
Mercury	µg/l	-	1.0	3	1.22	RBH104	1	<0.5	-	Further Action
Nickel	µg/l	4	20	3	2.1	-	1	2.5	-	No Further Action
Selenium	µg/l	-	10	3	2.8	-	1	<4.0	-	No Further Action
Zinc	µg/l	10.9	-	3	7.8	-	1	9.5	-	No Further Action
pH		6-9		3	10.0 10.2	RBH105 RBH104	1	12	TP101 0.4 m	Further Action
Naphthalene	µg/l	2	10*	3	<0.01	-	1	<0.01	-	No Further Action
Anthracene	µg/l	0.1	10*	3	<0.01	-	1	<0.01	-	No Further Action
Benzo[b]fluoranthene	µg/l	0.00017*	10*	3	<0.01	-	1	<0.01	-	No Further Action
Benzo[k]fluoranthene	µg/l	0.00017*	10*	3	<0.01	-	1	<0.01	-	No Further Action
Benzo(a)pyrene	µg/l	0.00017*	10*	3	<0.01	-	1	<0.01	-	No Further Action
Indeno(123-cd)pyrene	µg/l	0.00017*	10*	3	<0.01	-	1	<0.01	-	No Further Action



DETERMINAND	UNIT	EQS ^{1,2,3}	DWS ^{3,4,5}	NO. OF GW SAMPLES	MAX CONC. IN GROUNDWATER	LOCATION OF EXCEEDANCE	NO. OF LEACHATE SAMPLES	MAX CONC. IN LEACHATE	LOCATION OF EXCEEDANCE	ASSESSMENT
		AA								
Fluoranthene	µg/l	0.0063	10*	3	<0.01	-	1	<0.01	-	No Further Action
Benzo(ghi)perylene	µg/l	1.7–4	10*	3	<0.01	-	1	<0.01	-	
TPH C5-C6 (benzene)	µg/l	10	1	3	<1.0	-	1	<1.0	-	
TPH C6-C8 (toluene)	µg/l	74	700	3	<1.0	-	1	<1.0	-	
TPH C8-C10 (ethyl benzene)	µg/l	20	300	3	<1.0	-	1	<1.0	-	
TPH C10-C12 (xylene)	µg/l	30	500	3	<10	-	1	<10	-	
TPH C10-C12 (xylene)	µg/l	30	500	3	<10	-	1	<10	-	
TPH C12-C16	µg/l	2	90 ⁵	3	<10	-	1	<10	-	
TPH C16-C35	µg/l	50#	90 ⁵	3	<10	-	1	<10	-	
TPH C5-C6	µg/l	–	15000	3	<1.0	-	1	<1.0	-	
TPH C6-C8	µg/l	–	15000	3	<1.0	-	1	<1.0	-	
TPH C8-C10	µg/l	–	300	3	<1.0	-	1	<1.0	-	
TPH C10-C12	µg/l	–	300	3	<10	-	1	<10	-	
TPH C12-C16	µg/l	–	300	3	<10	-	1	<10	-	
TPH C16-C21	µg/l	–	300**	3	<10	-	1	<10	-	
TPH C21-C35	µg/l	–	300**	3	<10	-	1	<10	-	
Tetrachloroethylene	µg/l	0.4	10	3	<1.0	-	0	-	-	
Trichloroethylene	µg/l	10	10	3	<1.0	-	0	-	-	
Trichlorobenzene	µg/l	0.4	–	3	<1.0	-	0	-	-	



DETERMINAND	UNIT	EQS ^{1,2,3}	DWS ^{3,4,5}	NO. OF GW SAMPLES	MAX CONC. IN GROUNDWATER	LOCATION OF EXCEEDANCE	NO. OF LEACHATE SAMPLES	MAX CONC. IN LEACHATE	LOCATION OF EXCEEDANCE	ASSESSMENT
		AA								
Trichloromethane	µg/l	2.5	–	3	18.8 8.6 7.9	RBH101 RBH104 RBH105	0	-	-	No Further Action
Dichloromethane	µg/l	20	200	3	<1.0	-	0	-	-	
Carbon Tetrachloride	µg/l	12	3	3	<1.0	-	0	-	-	
Vinyl Chloride	µg/l	–	0.3	3	<1.0	-	0	-	-	

Notes

Solubility <0.01µg/l

AA – Annual Average

MAC- Maximum Admissible Concentration

* Polyaromatic hydrocarbons (PAH) - Benzo(a)pyrene (BaP), Benzo(b)fluoranthene, Benzo(k)fluoranthene, Benzo(g,h,i)-perylene and Indeno(1,2,3-cd)-pyrene. Benzo(a)pyrene can be considered as a marker for the other PAHs, hence only benzo(a)pyrene needs to be monitored for comparison with the biota EQS or the corresponding AA-EQS in water

** There are no WHO Guideline Values for aliphatic fractions C16-C21 and C21-C35, therefore the guideline value for aliphatic fractions inclusive of C8-C16 (300µg/l) has been applied.

1. The Water Environment (Water Framework Directive) (England and Wales) (Amendment) Regulations (2015)
2. Directive establishing a framework for Community action in the field of water policy (Water Framework Directive)
3. Council Directive on pollution caused by certain dangerous substances discharged into the aquatic environment of the Community (Dangerous Substances Directive) - List II substances
4. Council Directive on the quality of water intended for human consumption (Drinking Water Directive)
5. WHO Guidelines for Drinking Water Quality. Third edition (2004)



4.2.1. CONTROLLED WATER RISK ASSESSMENT AND MITIGATION

This comparison indicates that the data exceeds the EQS values for the following inorganic compounds:

- ✿ Chromium (VI)
- ✿ Chromium (III)
- ✿ Copper
- ✿ Mercury
- ✿ pH
- ✿ Trichloromethane

Where leachate analysis has been undertaken, this can overstate the risk and is not wholly representative of the site characterisation.

4.2.2. M-BAT ASSESSMENT

Due to exceedances in both soil and leachate samples for copper, an m-BAT assessment has been completed to assess the bioavailability of the metals with respect to surface water receptors (River Irwell, Culvert). The chemical values from the groundwater analysis have been input into the assessment.

Where the Risk Characterisation Ratio (RCR) is greater than 1, this indicates the bioavailable concentration is above the EQS and the receptor is therefore at risk. In this instance, groundwater chemical data for DOC was input into the m-BAT for the onsite locations. The following exceed the RCR:

1. RBH105
 - Copper (1.76)

The m-BAT assessment has confirmed that the RCR is marginally above 1 in the groundwater sample from RBH105. The RCR was below 1 in the other groundwater samples.

In light of the above assessment, E3P do not consider the site to pose an unacceptable level of risk to surface waters for copper.

However, further analysis of the surface water in the River Irwell should be undertaken as groundworks progress, to ensure no future mobilisation of contaminants is caused, which may pose a risk to the watercourse.

4.2.3. DISCUSSION OF CONTROLLED WATERS RISK ASSESSMENT

Historically, the site has been occupied by a Cotton Finishing Works, Copper Roller Works and Mills which are potential sources of mobile contamination. However, the initial soil analysis has not identified a risk to controlled waters.

The site is underlain by shallow sandstone bedrock which is classified as a principal aquifer. However, the majority of the identified inorganic compounds are of low solubility. The sensitivity of the principal aquifer in the bedrock is reduced given the closest potable groundwater abstraction is located 507 m north.



Trichloromethane has been recorded above the limit of detection in all three groundwater samples from the rotary boreholes which have monitoring wells set within the sandstone bedrock. All other VOCs are less than the limit of detection. It is unlikely that this relates to residual contamination from the former works and mills located on site as these land uses were historical and the compounds would have degraded.. It is considered possible that this compound may have migrated from commercial sites further afield. The site is topographically lower than the land to the east, therefore it is likely that groundwater will flow towards the site and towards the River Irwell. The results of the groundwater analysis indicate a higher concentration of trichloromethane at RBH101 in the north east as opposed to RBH105 located in the south west.

The site is encapsulated in hardstanding, therefore infiltration will be limited.

Based on the above, there is considered to be a low risk to controlled waters.

An additional round of groundwater sampling and surface water analysis is recommended to further assess the risk to controlled waters. The results will be issued in an addendum report.

4.3. GROUND GAS

The potential impact on the development from ground gases has been assessed with reference to standards and guidelines published in CIRIA Report 665 – *Assessing risks posed by hazardous ground gases to buildings* (2007). However, it is recommended that the full ground gas assessment and recommended protection measures are agreed with the local authority prior to their adoption on site. Furthermore, all protection measures adopted should be validated by a suitably qualified engineer.

4.1. INVESTIGATION RATIONALE

The ICSM has identified that the underlying Made Ground, infilled quarry and former works and mills may represent a potential source of ground gas generation. Based on the identification of these sources, E3P has determined that the site represents a low ground gas source generation potential.

Within the context of the proposed residential end use and ground gas generation potential, the gas assessment requires that six visits are required over three months, with at least two sets of readings at low or falling atmospheric pressure as set out within CIRIA 665 Tables 5.5a and 5.5b.

The spacing requirements for monitoring wells are detailed within CIRIA 665 Table 4.2, which indicates that for low gas hazard sites (Made Ground with limited degradable material, organic clay of limited thickness) and a high sensitivity development, nominal well spacing should be between 25 m and 50 m.

Table 4.5 Ground Gas Monitoring Location Rationale

LOCATION	GROUND GAS SOURCE	DEPTH OF MONITORING WELL (m)
RBH101	Bedrock	2.0–10.0
RBH102	Made Ground	0.5–1.5
RBH103	Bedrock	2.0–10.0
RBH104	Bedrock	2.0–10.0
RBH105	Bedrock	2.0–10.0
RBH106	Bedrock	2.0–10.0



4.2. MONITORING METHODOLOGY

Concentrations of methane (CH₄), carbon dioxide (CO₂) and oxygen (O₂) were measured using a calibrated infra-red gas analyser (GFM435) with gas flow rates were measured using an integrated flow meter.

Gas measurements were recorded for a minimum of 60 seconds at each location, at which point the maximum concentration of CH₄ and CO₂, together with the lowest concentration of O₂ were recorded. The results of the ground gas monitoring are presented in Table 4.7.

CIRIA C665 provides assessments for carbon dioxide and methane based upon gas screening values (GSVs) utilising flow rates and concentrations. The site-based GSVs for steady state methane and carbon dioxide are based upon the following equation:

$$GSV = \frac{\text{concentration (by vol)}}{100} \times \text{flowrate (1 / hr)}$$

The GSVs within CIRIA C665 are based upon all buildings other than standard residential houses. The thresholds for GSVs based upon CIRIA guidance are provided within Table 4.6.

TABLE 4.6 RESIDENTIAL THRESHOLDS FOR GAS SCREENING VALUES (GSV) IN ACCORDANCE WITH CIRIA C665– COMMERCIAL END USE

CIRIA – NO SUBFLOOR VOID	
CLASSIFICATION	GSV (METHANE AND CARBON DIOXIDE)
CS1	< 0.07
CS2	< 0.70
CS3	< 3.5
CS4	< 15
CS5	< 70
CS6	> 70

4.2.1. SUMMARY OF MONITORING RESULTS

Table 4.7 presents of the ground gas and groundwater monitoring results to date.



TABLE 4.7 SUMMARY OF GROUND GAS MONITORING RESULTS

WELL	DATE	CH ₄ INITIAL (%V/V)	CH ₄ STEADY (%V/V)	CH ₄ GSV (l/hr)	CO ₂ INITIAL (%V/V)	CO ₂ STEADY (%V/V)	CO ₂ GSV (l/hr)	O ₂ (%V/V)	ATMOS (mb)	ATMOS. DYNAMIC	FLOW (l/hr)	RESPONSE ZONE (m bgl)	DEPTH TO BASE (m bgl)	DEPTH TO WATER (m bgl)
RBH101	09/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	20.5	1013	Falling	0.1	2.0–10.0	6.70	2.20
	23/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	20.1	1017	Falling	0.1		6.40	2.85
RBH102	09/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	19.3	1013	Falling	0.1	0.5–1.5	1.40	1.40
	23/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	20.3	1017	Falling	0.1		1.40	1.40
RBH103	09/03/21	-0.1	-0.1	-0.0031	-0.1	-0.1	-0.0031	19.8	1013	Falling	3.1	2.0–10.0	7.45	3.20
	23/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	19.9	1017	Falling	0.1		7.45	3.68
RBH104	09/03/21	-0.2	-0.2	-0.0044	-0.1	-0.1	-0.0022	16.8	1013	Falling	2.2	2.0–10.0	5.62	2.00
	23/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	19.5	1017	Falling	0.1		5.62	2.15
RBH105	09/03/21	-0.1	-0.1	-0.0001	-0.1	-0.1	-0.0001	20.3	1013	Falling	0.1	2.0–10.0	5.40	1.75
	23/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	20.1	1017	Falling	0.1		5.40	1.80
RBH106	09/03/21	-0.1	-0.1	-0.0001	-0.1	-0.1	-0.0001	19.6	1010	Falling	0.1	2.0–10.0	4.90	1.75
	23/03/21	0.1	0.1	0.0001	0.1	0.1	0.0001	20.6	1017	Falling	0.1		4.90	1.81



4.2.2. SOURCES OF GROUND GAS

The Phase I report and subsequent ground investigation has identified the following potential sources of ground gas:

- ✳ Made Ground deposits.
- ✳ Infilled quarry.
- ✳ Former works and mills.

4.2.3. GROUNDWATER

Monitoring wells RBH105 and RBH106 were flooded during the first two monitoring visits and cannot therefore be included within the gas assessment. RBH104 was also flooded on the first monitoring visit.

Groundwater levels were observed between 1.40 m and 3.68 m bgl.

4.2.4. GAS FLOW

During the monitoring a positive flow was noted in all boreholes. The measure of positive flow is considered to be the result of groundwater fluctuations and flooding of the well causing compression – as opposed to gas generation – as the highest flows are recorded during periods of high groundwater levels.

4.2.5. GAS CONCENTRATIONS

No elevated concentrations of methane or carbon dioxide were recorded during the initial monitoring visits.

4.2.6. GAS ASSESSMENT

In accordance with the methodology outlined with the CIRIA publication C665, E3P have utilised the results of the ground gas monitoring surveys to calculate a tentative gas screening value (GSV). The GSVs for the monitoring positions are summarised in Table 4.8.

TABLE 4.8 GAS RISK PROFILE AND LOCATION

LOCATION	MAX CH ₄ (% v/v)	GSV (l/hr)	MAX CO ₂ (% v/v)	GSV (l/hr)	CLASSIFICATION
RBH101	0.1	0.0001	0.1	0.0001	CS1
RBH102	0.1	0.0001	0.1	0.0001	CS1
RBH103	0.1	-0.0031	0.1	0.0001	CS1
RBH104	0.2	-0.0044	0.1	-0.0022	CS1
RBH105	0.1	0.0001	0.1	0.0001	CS1
RBH106	0.1	0.0001	0.1	0.0001	CS1

The GSV has been compared to the criteria outlined with CIRIA C665 to determine the level of risk to the proposed development and to ensure the appropriate remedial options are incorporated into any future building design in this area.



Preliminary ground gas monitoring suggests that the site can be classified as CS1, and it is considered that gas protection measures will not be required. This will be confirmed on completion of the monitoring.

4.3. POTABLE WATER SUPPLY

This section provides a summary of the site investigation data with reference to the selection of potable water supply pipework. The assessment is made with reference to the UK Water Industry Research (UKWIR) publication "Guidance on the selection of Water Supply Pipes to be used in Brownfield Sites"

TABLE 4.9 PIPELINE SELECTION PE THRESHOLD CONCENTRATIONS

Contaminant Group	PE-threshold (mg/kg)	Concentrations at <u>Current</u> pipeline depth (mg/kg)
Total VOC	0.5	<1.0
Total BTEX And MTBE	0.1	N/A
Total SVOCs (Excluding PAH and those substances marked with an *)	2	N/A
EC5-EC10 Aliphatic and Aromatic Hydrocarbons	2	<1.0
EC10-EC16- Aliphatic and Aromatic Hydrocarbons	10	<4.0
EC16-EC40 Aliphatic and Aromatic Hydrocarbons	500	67
Phenols (From SVOC Analysis)*	2	N/A
Cresols and Chlorinated Phenols (From SVOC Analysis)	2	NA
Ethers*	0.5	NA
Nitrobenzene*	0.5	NA
Ketones*	0.5	NA
Aldehydes*	0.5	NA
Amines	Fail	NA
Other Consideration		
Are there any exceedances of the PE threshold outside of the pipeline depth?	No	
Is free product present in soil and groundwater?	None	
Could hydrocarbon impact at greater depth than current pipeline depth be mobilised by rising groundwater levels?	No hydrocarbon impact has been identified.	
Will soils impacted with above determinands likely be utilised elsewhere on site?	No	
Will soils be imported to site as part of any future earth works	Currently unknown. The importation of materials may affect the WIR Risk Assessment which should be updated after completion.	

Notes - Pipe line depth normally between 0.75m–1.35m

Based on the assessment of current site conditions it is likely that PE pipe will be suitable for the proposed development.



4.4. CONCEPTUAL SITE MODEL

Following the completion of the intrusive site investigation, chemical analysis and risk assessment, the conceptual model shown in Table 4.10 has been prepared for the site.

TABLE 4.10 CONCEPTUAL MODEL

POLLUTANT LINKAGE	CONTAMINANT (SOURCE)	PATHWAY	RECEPTOR	PROBABILITY	CURRENT RISK	RESIDUAL RISK AFTER MITIGATION
PL1 PL2	Heavy Metals, non-volatile PAH (Made Ground, Former Works and Mills, Infilled Quarry)	Dermal contact. Dermal contact and ingestion.	Future site users. Off-site receptors.	Low Likelihood	Low	LOW
Assessment: No exceedances have been identified in the chemical testing completed.						
Recommendation: Due to the presence of Made Ground, construction works should be completed with PPE and provision of welfare. A clean cover system should be installed in areas of soft landscaping to prevent direct exposure to the underlying Made Ground.						
PL3	ACM in Made Ground	Inhalation of dust.	Future site users. Buildings. Off-site land users.	Likely	High	LOW
Assessment: Asbestos in the form of loose chrysotile fibres has been identified in the granular Made Ground in TP104 at <0.001 %.						
Recommendation: Asbestos impacted soils should be managed in accordance with the asbestos CSM, A cover system to landscaped areas will prevent exposure to future site users. Construction works completed with PPE and provision of welfare.						



POLLUTANT LINKAGE	CONTAMINANT (SOURCE)	PATHWAY	RECEPTOR	PROBABILITY	CURRENT RISK	RESIDUAL RISK AFTER MITIGATION
PL4	Volatile contaminants such as hydrocarbons, (Made Ground, Former Works and Mills)	Inhalation of vapours. Migration through permeable strata and preferential pathways.	Future site users. Off-site receptors.	Low Likelihood	Low	LOW
Assessment: No exceedances have been identified in the chemical testing completed. Recommendation: Due to the presence of Made Ground, construction works should be completed with PPE and provision of welfare. If any unidentified contamination is uncovered during remediation and enabling works, the soils may require localised excavation and validation.						
PL4	Methane, carbon dioxide (Made Ground, Infilled Quarry, Former Works and Mills)	Inhalation of gas. Migration through permeable strata and preferential pathways. Explosion in confined spaces.	Future site users. Buildings. Off-site land users.	Low likelihood	Low	LOW
Assessment: Monitoring completed to date suggests CS1. Recommendation: Completion of ground gas monitoring.						



POLLUTANT LINKAGE	CONTAMINANT (SOURCE)	PATHWAY	RECEPTOR	PROBABILITY	CURRENT RISK	RESIDUAL RISK AFTER MITIGATION
PL5	Mobile contaminants such as metals, PAHs, hydrocarbons, volatile compounds (Made Ground, Infilled Quarry, Former Works and Mills)	Surface runoff. Migration through permeable strata and preferential pathways. Perched waters migration.	Groundwater (Principal aquifer in bedrock). Surface water (River Irwell).	Low Likelihood	Low	TBC

Assessment:

Leachate and groundwater analysis has identified exceedances of the EQS for chromium, copper, mercury, trichloromethane and pH.

Historically, the site has been occupied by a Cotton Finishing Works, Copper Roller Works and Mills. The initial soil analysis has not identified a risk to controlled waters.

The site is underlain by shallow sandstone bedrock which is classified as a principal aquifer. However, the majority of the identified inorganic compounds are of low solubility. The sensitivity of the principal aquifer in the bedrock is reduced given the closest potable groundwater abstraction is located 507 m north.

Trichloromethane has been recorded above the limit of detection in all three groundwater samples from the rotary boreholes which have monitoring wells set within the sandstone bedrock. All other VOCs are less than the limit of detection. It is unlikely that this relates to residual contamination from the former works and mills located on site as these land uses were historical and the compounds would have degraded. It is considered possible that this compound may have migrated from commercial sites further afield. The site is topographically lower than the land to the east, therefore it is likely that groundwater will flow towards the site and towards the River Irwell. The results of the groundwater analysis indicate a higher concentration of trichloromethane at RBH101 in the north east as opposed to RBH105 located in the south west.

The site is encapsulated in hardstanding, therefore infiltration will be limited.

Recommendation:

An additional round of groundwater sampling and surface water analysis is recommended to further assess the risk to controlled waters. The results will be issued in an addendum report



POLLUTANT LINKAGE	CONTAMINANT (SOURCE)	PATHWAY	RECEPTOR	PROBABILITY	CURRENT RISK	RESIDUAL RISK AFTER MITIGATION
PL6	Sulphate (potential ash within Made Ground)	Sulphate attack on concrete.	Building structure.	Low likelihood	Low	LOW
Assessment: The soils at the site meet class DS-1, AC-1s.						
Recommendation: Concrete should be designed in accordance with the chemical testing results.						
PL7	Organic contaminants such as hydrocarbons, solvents (Made Ground, Former Works and Mills)	Ingestion of tainted water supply.	Future site users. Water pipes.	Low likelihood	Low	LOW
Assessment: Low likelihood as no significant contamination anticipated at pipeline depth across the site (0.75–1.35 m). Current chemical analysis indicates that PE pipe will be suitable for the site.						
Recommendation: A pipeline risk assessment should be completed following a process of remediation and enabling works. Post-remediation and enabling works ground conditions may be different from those identified during this site investigation.						
PL8	Phytotoxic contaminants (Made Ground, Former Works and Mills)	Direct Contact (plant uptake).	Flora.	Low Likelihood	Low	LOW
Assessment: No exceedances have been identified in the chemical testing completed.						
Recommendation Due to the presence of Made Ground impacted by asbestos, a clean cover system should be installed in areas of proposed planting/soft landscaping.						



Main exposure pathways: PL1 = soil ingestion, PL2 = dermal contact and ingestion, PL3 = dust inhalation; PL4 = Vapour/Gas Inhalation; PL5 = Vertical / Lateral Migration; PL6 = Corrosion of concrete; PL7=Tainting of water supply; PL8 = Uptake by plants;



5. GEOTECHNICAL ASSESSMENT

5.1. PROPOSED DEVELOPMENT

E3P understands that the proposed development will comprise offices and residential apartments with associated car parking.

5.2. SUMMARY OF GROUND CONDITIONS

Made Ground

- Made Ground deposits were encountered within all exploratory hole locations to a maximum proven depth of 1.50 m bgl.
- Made Ground deposits generally comprised concrete to circa 0.35 m bgl underlain by grey sandy gravel of limestone (Type 1 MOT).
- In addition, RBH102 identified a brick wall between 0.70 m and 1.50 m bgl. RBH104 identified a brick wall between 0.35 m and 0.80 m bgl.
- TP101-TP104 identified concrete with a rubber membrane over brown gravelly fine to medium sand with concrete and brick to 0.70 m bgl.

Drift

- Drift deposits were not encountered during the ground investigation.

Solid

- The solid bedrock geology was encountered between 0.45 m and 10.00 m bgl. The solid geology comprises dense to very dense SANDSTONE.
- Weathered sandstone bedrock was encountered as reddish brown medium SAND between 0.35 m and 1.50 m bgl in RBH101 and between 0.70 m and 0.80 m bgl in TP101, TP103 and TP104.
- A former quarry is present in the centre of the site, therefore there is the potential for notable changes in the depth of bedrock.

Groundwater

- Groundwater strikes were not encountered during the ground investigation. Subsequent monitoring recorded groundwater between 1.40 and 3.68 m bgl.

5.3. SITE PREPARATION

The site should be cleared and any vegetation below areas of proposed development stripped in accordance with Series 200 of the *Manual of Contract Documents for Highway Works (MCHW)*. This should include the following:



- ✳️ Roots present below the footprint of proposed structures and infrastructure should be grubbed out and the resulting void infilled with suitable compacted engineered fill.
- ✳️ Demolition of all existing buildings and removal of all concrete hardstanding (where applicable).
- ✳️ Redundant services should be sealed off and grubbed out and replaced with suitable compacted engineered fill.
- ✳️ Buried structures and old foundations have been encountered on site. These should be excavated from below the proposed development footprint with the resulting void backfilled.

5.4. FOUNDATION CONDITIONS AND ASSESSMENT OF POTENTIAL BEARING CAPACITIES

In due consideration of the identified ground conditions, in-situ and laboratory geotechnical testing, E3P has undertaken an assessment of the net safe allowable bearing pressure (ABP) within the underlying natural stratum to assist in the detailed design of foundations and infrastructure and determine the target founding stratum. The results of this assessment are summarised in Table 5.1.

TABLE 5.1 SUMMARY OF ABP

GRANULAR SOILS			
Description	Depth (Range m bgl)	Relative Density	Allowable Bearing Pressure (kN/m ²)
SAND (Weathered Bedrock)	1.00	Very Dense	504
SANDSTONE	1.00-9.00	Dense – Very Dense	403 - 505
SANDSTONE	6.63-6.98	Dense – Very Dense	3.3 MPa (3300 kN/m ²)

Based on the assessment of the relative undrained shear strength, relative in-situ densities and corresponding safe net allowable bearing pressure, the suitable target founding stratum has been identified as the underlying sandstone bedrock.

Due to the highly fractured nature of the bedrock, only one Unconfined Compressive Strength (UCS) test could be undertaken from the core recovered. The results indicate that at a depth of between 6.63–6.98 m bgl the sandstone recorded a strength of 3.3 (MPa) which equates to 3300 kN/m².

A culvert is located in the south-west corner of the site and significant obstructions will be present beneath the existing buildings. All obstructions would need to be removed as part of the enabling works prior to any piling.

While a detailed assessment of pile depths and bearing capacity is beyond the scope of this report, it is likely that piles would achieve a 'set' within the sandstone. Consideration of the effects of negative skin friction due to variability on the Made Ground and natural drift strata will be required.

A specialist piling contractor should be contacted to obtain detailed designs and costs for a specialist piling technique and to allow them to reduce the factor of safety based on their extensive pile testing data.



Post demolition boreholes are required to further inform the foundation and sub-structure design.

Table 5.2 outlines the anticipated depth to suitable founding strata from existing levels at each E3P location.

TABLE 5.2 ANTICIPATED FOUNDATIONS

LOCATION	ANTICIPATED FOUNDING STRATA DEPTH (m bgl)	GROUND WATER (m bgl)	TARGET STRATUM	TREES	FOUNDATION TYPE	TYPE OF CONCRETE
TP101	1.05	N/A	Dense SAND	N	Pile	DS-1 AC-1s
TP102	>1.00	N/A	Dense SAND	N	Pile	DS-1 AC-1s
TP103	1.05	N/A	Dense SAND	N	Pile	DS-1 AC-1s
TP104	1.05	N/A	Dense SAND	N	Pile	DS-1 AC-1s
RBH101	0.90	N/A	Dense SAND	N	Pile	DS-1 AC-1s
RBH102	1.85	N/A	SANDSTONE	N	Pile	DS-1 AC-1s
RBH103	1.05	N/A	SANDSTONE	N	Pile	DS-1 AC-1s
RBH104	1.15	N/A	SANDSTONE	N	Pile	DS-1 AC-1s
RBH105	0.90	N/A	SANDSTONE	N	Pile	DS-1 AC-1s
RBH106	1.85	N/A	SANDSTONE	N	Pile	DS-1 AC-1s

5.5. GROUND FLOOR SLABS

Given the nature of the proposed high-rise residential development it is recommended that a ground bearing floor slab be utilised.

In order to accommodate for differential settlement and slab failure, it is recommended further Plate Load Testing is undertaken on the sub-grade following the breaking out of hardstand and reduced level dig to understand settlement characteristics and inform a geotechnical design specification in order to engineer to the required level to support a proposed ground bearing slab.

5.6. HEAVE PRECAUTIONS

The site has been proven to be underlain by shallow bedrock and no clay soils have been identified, therefore heave precautions are not required.

5.7. HIGHWAYS CONSTRUCTION

A programme of remediation and enabling works will be required to remediate the proposed road subgrade in accordance with the requirements of the Manual of Contract Documents for Highway Works Volume 1 Specification for Highway Works (Series 600-Earthworks) for a method compaction.

It is considered that the material can be re-engineered using method compaction to achieve a CBR in excess of 5% if works are completed in favourable climatic conditions.



5.8. DRAINAGE

The presence of substantial depths of Made Ground across some areas of the site may result in settlement. It is therefore recommended that drain runs are designed using steeper gradients and flexible joints to allow for some differential settlement.

The presence of deep Made Ground across the site will preclude the use of soakaway drainage. If soakaway drainage is to be considered, full BRE365 testing must be completed to inform the detailed design.

5.9. CONCRETE DURABILITY

Based upon the results of the chemical analyses it is considered that subsurface concrete can be designed in accordance with Design Sulphate Class DS-1, Aggressive Chemical Environment for Concrete Classification (ACEC) AC-1s in accordance with the recommendations provided in BRE *Special Digest 1* (2005).

5.10. EXCAVATIONS

Trial pits were generally stable; as such, it is considered that near-surface excavations will be feasible.

Site observations indicated that excavations should be feasible in the near-surface with normal plant; however, obstructions were identified, including former foundations and former floor slabs. It is anticipated that any obstructions will be grubbed out during the reduced-level dig for the substructure works. Shallow bedrock has been identified, therefore larger plant may be required.

However, due to the depth and variability of the Made Ground and the likelihood of trench collapse, it is considered that all excavations are supported or battered back in accordance with the guidance contained in CIRIA R97. Furthermore, the site is topographically lower than the adjacent roadways, consideration must be given to retaining being constructed or current wall adapted to ensure the stability of the soils around the periphery of the site.

If local pumping of groundwater is required during the advancement of excavations for the proposed foundations then consideration should be given to the potential for dewatering gravels in the surrounding areas that may cause structural damage to building substructures in close proximity to the site.

TABLE 5.3 CIVIL ENGINEERING EXCAVATION RISK MATRIX

RISK ITEM	PRESENT	COMMENT
Running Sands	No	No running sand has been identified.
Minor Water Ingress	Yes	Minor water ingress will require localised dewatering/sump pumping during the construction of site drainage infrastructure. Ingress of water into foundation excavation will potentially flood foundation excavations, limiting the viability of spread foundations to be constructed.
Shallow Bedrock	Yes	Shallow bedrock has been identified. The presence of bedrock will impede excavation for drainage infrastructure using traditional excavation plant and equipment.



5.11. CONSTRUCTION ACTIVITY AND INSPECTION

The following activities and inspections should be incorporated into the site works:

- ✿ Due to the variability of the soils at the site, it is recommended that sufficient allowance is made for the inspection of formations and sub-formations to foundations and pavement construction.
- ✿ Excavations where access is required should be subject to a risk assessment from a competent person and, where appropriate, mitigation measures such as benching back the sides or use of support systems in accordance with CIRIA R97 should be utilised.
- ✿ It is considered that dewatering may be required, especially following periods of heavy rainfall. Removal of surface water and water within trenches should be possible with conventional sump pumping. Discharge of any water should be agreed with the relevant regulatory body and be undertaken under a trade effluent discharge, where required. Measures to remove silt and suspended solids may be required and consideration should be given to the provision of space for settling tanks or an attenuation pond.
- ✿ Where access to confined spaces is required, appropriate mitigation measures should be addressed within the construction stage health and safety plan. Particular account should be taken of the gas results.
- ✿ The presence of potential contamination and mitigation measures should be addressed as part of the construction stage health and safety plan and should include measures to design out the risks, reduce their impact and, finally, include the use of personnel protective equipment (PPE).



5.12. GEOTECHNICAL RISK REGISTER

POTENTIAL CONSTRAINT	ABNORMAL	LOCATION ON-SITE	ESTIMATED AREA OF SITE AT RISK (%)	ASSESSMENT AND MITIGATION
Remediation of contaminated soils		On-site	TBC	Asbestos should be managed according to the asbestos CSM. Should significant backfill be needed deeper or specialist foundations may be required in those areas.
Bedrock		On-site	100	Shallow bedrock is identified, this represents a significant risk in terms of the viability for excavations to install infrastructure using standard construction equipment. The actual depth is currently unprofiled across the site.
Obstructions		All	100	Significant obstructions are present under the existing buildings.
Artificially levelled and filled platforms		On-site	100	The site appears to have been levelled and artificially backfilled. An infilled quarry is present in the centre of the site.
Retaining walls		On-site	100	There are retaining walls on all boundaries of the site. These will need to be considered during the phased demolition of the site.
Trench collapse		All	100	Made Ground present beneath the site is likely to be loosely compacted and possibly prone to collapse.
Volume change potential clay		N/A	N/A	No clay soils have been identified, therefore heave precautions are not required.
Running sands		N/A	N/A	Data searches indicate low risk.
Ground dissolution		N/A	N/A	Data searches indicate no hazard.
Concrete design		On-site	100	The soils meet class DS-1, AC-1s.
Low-permeability ground		On-site	N/A	The presence of deep Made Ground across the site will preclude the use of soakaway drainage. If soakaway drainage is to be considered, full BRE365 testing must be completed to inform the detailed design.



Renaissance, Deansgate

Phase II Geoenvironmental Site Assessment
May 2021

POTENTIAL CONSTRAINT	ABNORMAL	LOCATION ON-SITE	ESTIMATED AREA OF SITE AT RISK (%)	ASSESSMENT AND MITIGATION
Services/sensitive structures		-	-	A review of online services has identified a number of services within the site boundary including a culvert in the south-west. Piling may not be possible within close proximity to any sensitive infrastructure.
Abnormal foundation solutions		On-site	100	A piled foundation will be required due to the imposed loads, presence of deep Made Ground and obstructions.
Areas not investigated		On-site	60	Further investigation will be required once the existing buildings have been demolished.



5.13. FURTHER WORKS

Based on the findings of the intrusive site investigation, the following additional works are recommended to be completed in due course:

-  Further investigation of inaccessible areas and extensive post demolition ground investigation.
-  Additional round of groundwater and surface water sampling.
-  Further geotechnical testing to determine the settlement characteristics for ground bearing floor slab (upon completion of the reduced level dig) and pavement design.
-  Foundations to be designed by suitably qualified Structural Engineer.
-  Geotechnical earthworks strategy (infrastructure).
-  Remediation and enabling works strategy.
-  Construction phase Surface Water Management Plan.



6. CONCLUSIONS AND RECOMMENDATIONS

6.1. CONTAMINATED LAND ASSESSMENT

Human Health	The Tier I assessment identified a single exceedance for asbestos. Loose chrysotile fibres were identified in the granular Made Ground in TP104 at <0.001 %. No visual signs of ACM were encountered during the ground investigation; it is therefore likely that only trace fibres are present. Impacted soils should be managed according to the asbestos risk mitigation conceptual site model. The installation of a suitable cover system in all landscaping and public open space will remove any potential for direct exposure to impacted soils. The specific design and installation process for the appropriate cover systems should be defined within a site remediation and enabling works strategy. Chemical analysis of the natural granular deposits has identified these soils to be acceptable for use as subsoil within the proposed landscaped areas; however, further chemical validation samples will be required to confirm this. There are no suitable sources of topsoil available on the site. Further post-demolition investigations are required to confirm the findings of this initial assessment as and when full and unrestricted access is available.
Controlled Waters	Leachate and groundwater analysis has identified exceedances of the EQS for chromium, copper, mercury, trichloromethane and pH. Historically, the site has been occupied by a Cotton Finishing Works, Copper Roller Works and Mills which are potential sources of mobile contamination. However, the initial soil analysis has not identified a risk to controlled waters. The site is underlain by shallow sandstone bedrock which is classified as a principal aquifer. However, the majority of the identified inorganic compounds are of low solubility. The sensitivity of the principal aquifer in the bedrock is reduced given the closest potable groundwater abstraction is located 507 m north. Trichloromethane has been recorded above the limit of detection in all three groundwater samples from the rotary boreholes which have monitoring wells set within the sandstone bedrock. All other VOCs are less than the limit of detection. It is unlikely that this relates to residual contamination from the former works and mills located on site as these land uses were historical and the compounds would have degraded. It is considered possible that this compound may have migrated from commercial sites further afield. The site is topographically lower than the land to the east, therefore it is likely that groundwater will flow towards the site and towards the River Irwell. The results of the groundwater analysis indicate a higher concentration of trichloromethane at RBH101 in the north east as opposed to RBH105 located in the south west.



Controlled Waters	The site is encapsulated in hardstanding, therefore infiltration will be limited. An additional round of groundwater sampling and surface water analysis is recommended to further assess the risk to controlled waters. The results will be issued in an addendum report.
Ground Gas	Characteristic Situation 1 (pending completion of gas monitoring).
Potable Water	This will need to be confirmed following the completion of a UKWIR risk assessment. Post-remediation and enabling works ground conditions may be different from those identified during this site investigation. Current indications suggest that PE pipe may be suitable.

6.2. GEOTECHNICAL ASSESSMENT

The natural SAND (weathered bedrock) has been assessed as being very dense with a net allowable bearing pressure (ABP) in the order of 504 kN/m² at circa 1 m bgl.

The underlying SANDSTONE has a net ABP of 403-505 kN/m² between 1.00 m and 9.00 m bgl.

Given the significant obstructions, prior to the construction of any foundation solution, a programme of remediation and enabling works will be required to remove existing foundation and slab structures and re-engineer the site to provide suitable development platform levels.

The Made Ground is not considered a suitable target founding stratum.

In respect of the proposed development, E3P consider it feasible to construct the proposed residential apartment blocks utilising piled foundations set within the underlying sandstone bedrock. The final foundation solution will be dependent on the structural loadings, elevation and should be designed by a suitably qualified structural engineer with detailed designs from a specialist piling contractor.

Post demolition boreholes are required to further inform the foundation and sub-structure design.

END OF REPORT



APPENDIX I

LIMITATIONS

1. This report and its findings should be considered in relation to the terms of reference and objectives agreed between E3P and the client as indicated in Section 1.3.
2. For the work, reliance has been placed on publicly available data obtained from the sources identified. The information is not necessarily exhaustive and further information relevant to the site may be available from other sources. When using the information it has been assumed it is correct. No attempt has been made to verify the information.
3. This report has been produced in accordance with current UK policy and legislative requirements for land and groundwater contamination which are enforced by the local authority and the Environment Agency. Liabilities associated with land contamination are complex and requires advice from legal professionals.
4. During the site walkover, reasonable effort has been made to obtain an overview of the site conditions. However, during the site walkover, no attempt has been made to enter areas of the site that are unsafe or present a risk to health and safety, are locked, barricaded, overgrown, or the location of the area has not been made known or accessible.
5. Access considerations, the presence of services and the activities being carried out on the site limited the locations where sampling locations could be installed and the techniques that could be used.
6. Site sensitivity assessments have been made based on available information at the time of writing and are ultimately for the decision of the regulatory authorities.
7. Where mention has been made to the identification of Japanese Knotweed and other invasive plant species and asbestos or asbestos-containing materials, this is for indicative purposes only and do not constitute or replace full and proper surveys.
8. The executive summary, conclusions and recommendations sections of the report provide an overview and guidance only and should not be specifically relied upon without considering the context of the report in full.
9. E3P cannot be held responsible for any use of the report or its contents for any purpose other than that for which it was prepared. The copyright in this report and other plans and documents prepared by E3P is owned by them and no such plans or documents may be reproduced, published or adapted without written consent. Complete copies of this may, however, be made and distributed by the client as is expected in dealing with matters related to its commission. Should the client pass copies of the report to other parties for information, the whole report should be copied, but no professional liability or warranties shall be extended to other parties by E3P in this connection without their explicit written agreement there to by E3P.
10. New information, revised practices or changes in legislation may necessitate the re-interpretation of the report, in whole or in part.



APPENDIX II

GLOSSARY

TERMS

ACM	Asbestos-containing material	MMP	Materials management plan
ADS	Acoustic design statement	ND	Not detected
AST	Above-ground storage tank	NDP	Nuclear density probe
BGS	British Geological Survey	NMP	Noise management plan
BSI	British Standards Institute	NPSE	Noise policy statement for England
BTEX	Benzene, toluene, ethylbenzene, xylenes	NR	Not recorded
CA	Coal Authority	PAH	Polycyclic aromatic hydrocarbon
CBR	California bearing ratio	PCB	Polychlorinated biphenyl
CIEH	Chartered Institute of Environmental Health	PI	Plasticity index
CIRIA	Construction Industry Research Association	PID	Photo ionisation detector
CLEA	Contaminated land exposure assessment	POS	Public open space
CML	Council of Mortgage Lenders	PPE	Personnel protective equipment
CoC	Contaminants of concern	ProPG	Professional practice guidance
CSM	Conceptual site model	QA	Quality assurance
DNAPL	Dense non-aqueous phase liquid (chlorinated solvents, PCB)	SGV	Soil guideline value
DWS	Drinking water standard	SPH	Separate-phase hydrocarbon
EA	Environment Agency	SPT	Standard penetration test
EQS	Environmental quality standard	SVOC	Semi-volatile organic compound
FFL	Finished floor level	TPH	Total and speciated petroleum hydrocarbon
GAC	General assessment criteria	TPH CWG	Total Petroleum Hydrocarbon (Criteria Working Group)
GL	Ground level	UKWIR	United Kingdom Water Infrastructure Risk
GSV	Gas screening value	UST	Underground storage tank
HCV	Health criteria value	VCC	Vibro-concrete column
ICSM	Initial conceptual site model	VOC	Volatile organic compound
LEL	Lower explosive limit	VRSC	Vibro-replacement stone columns
LMRL	Lower method reporting limit	VSC	Vibro-stone columns
LNAPL	Light non-aqueous phase liquid (petrol, diesel, kerosene)	WHO	World Health Organisation
MCV	Moisture condition value	WRAP	Waste and Resources Action Programme




MIBK	Methyl isobutyl ketone	WTE	Water table elevation
m	Metres	ppm	Parts per million
km	Kilometres	mg/m³	Milligram per metre cubed
% v/v	Percent volume in air	m bgl bgl	Metres below ground level
mb	Millibars (atmospheric pressure)	m bcl	Metre below cover level
l/hr	Litres per hour	mAOD	Metres above ordnance datum (sea level)
µg/l	Micrograms per litre (parts per billion)	kN/m²	Kilonewtons per metre squared
ppb	Parts per billion	µm	Micrometre
mg/kg	Milligrams per kilogram (parts per million)	SSRT	Site Specific Remediation Target
PSD	Particle Size Distribution	DD	Dry Density
CL:AIRE	Contaminated Land: Applications in Real Environments	Mc	Moisture Content
ρ	Bulk Density	GPR	Ground Penetrating Radar
NDP	Nuclear Density Probe	FFL	Finished Floor Level
LEL	Lower Explosive Limit	UKWIR	UK Water Industry Research
CIRIA	Construction Industry Research and Information Association	LOD	Limit of Detection



APPENDIX III

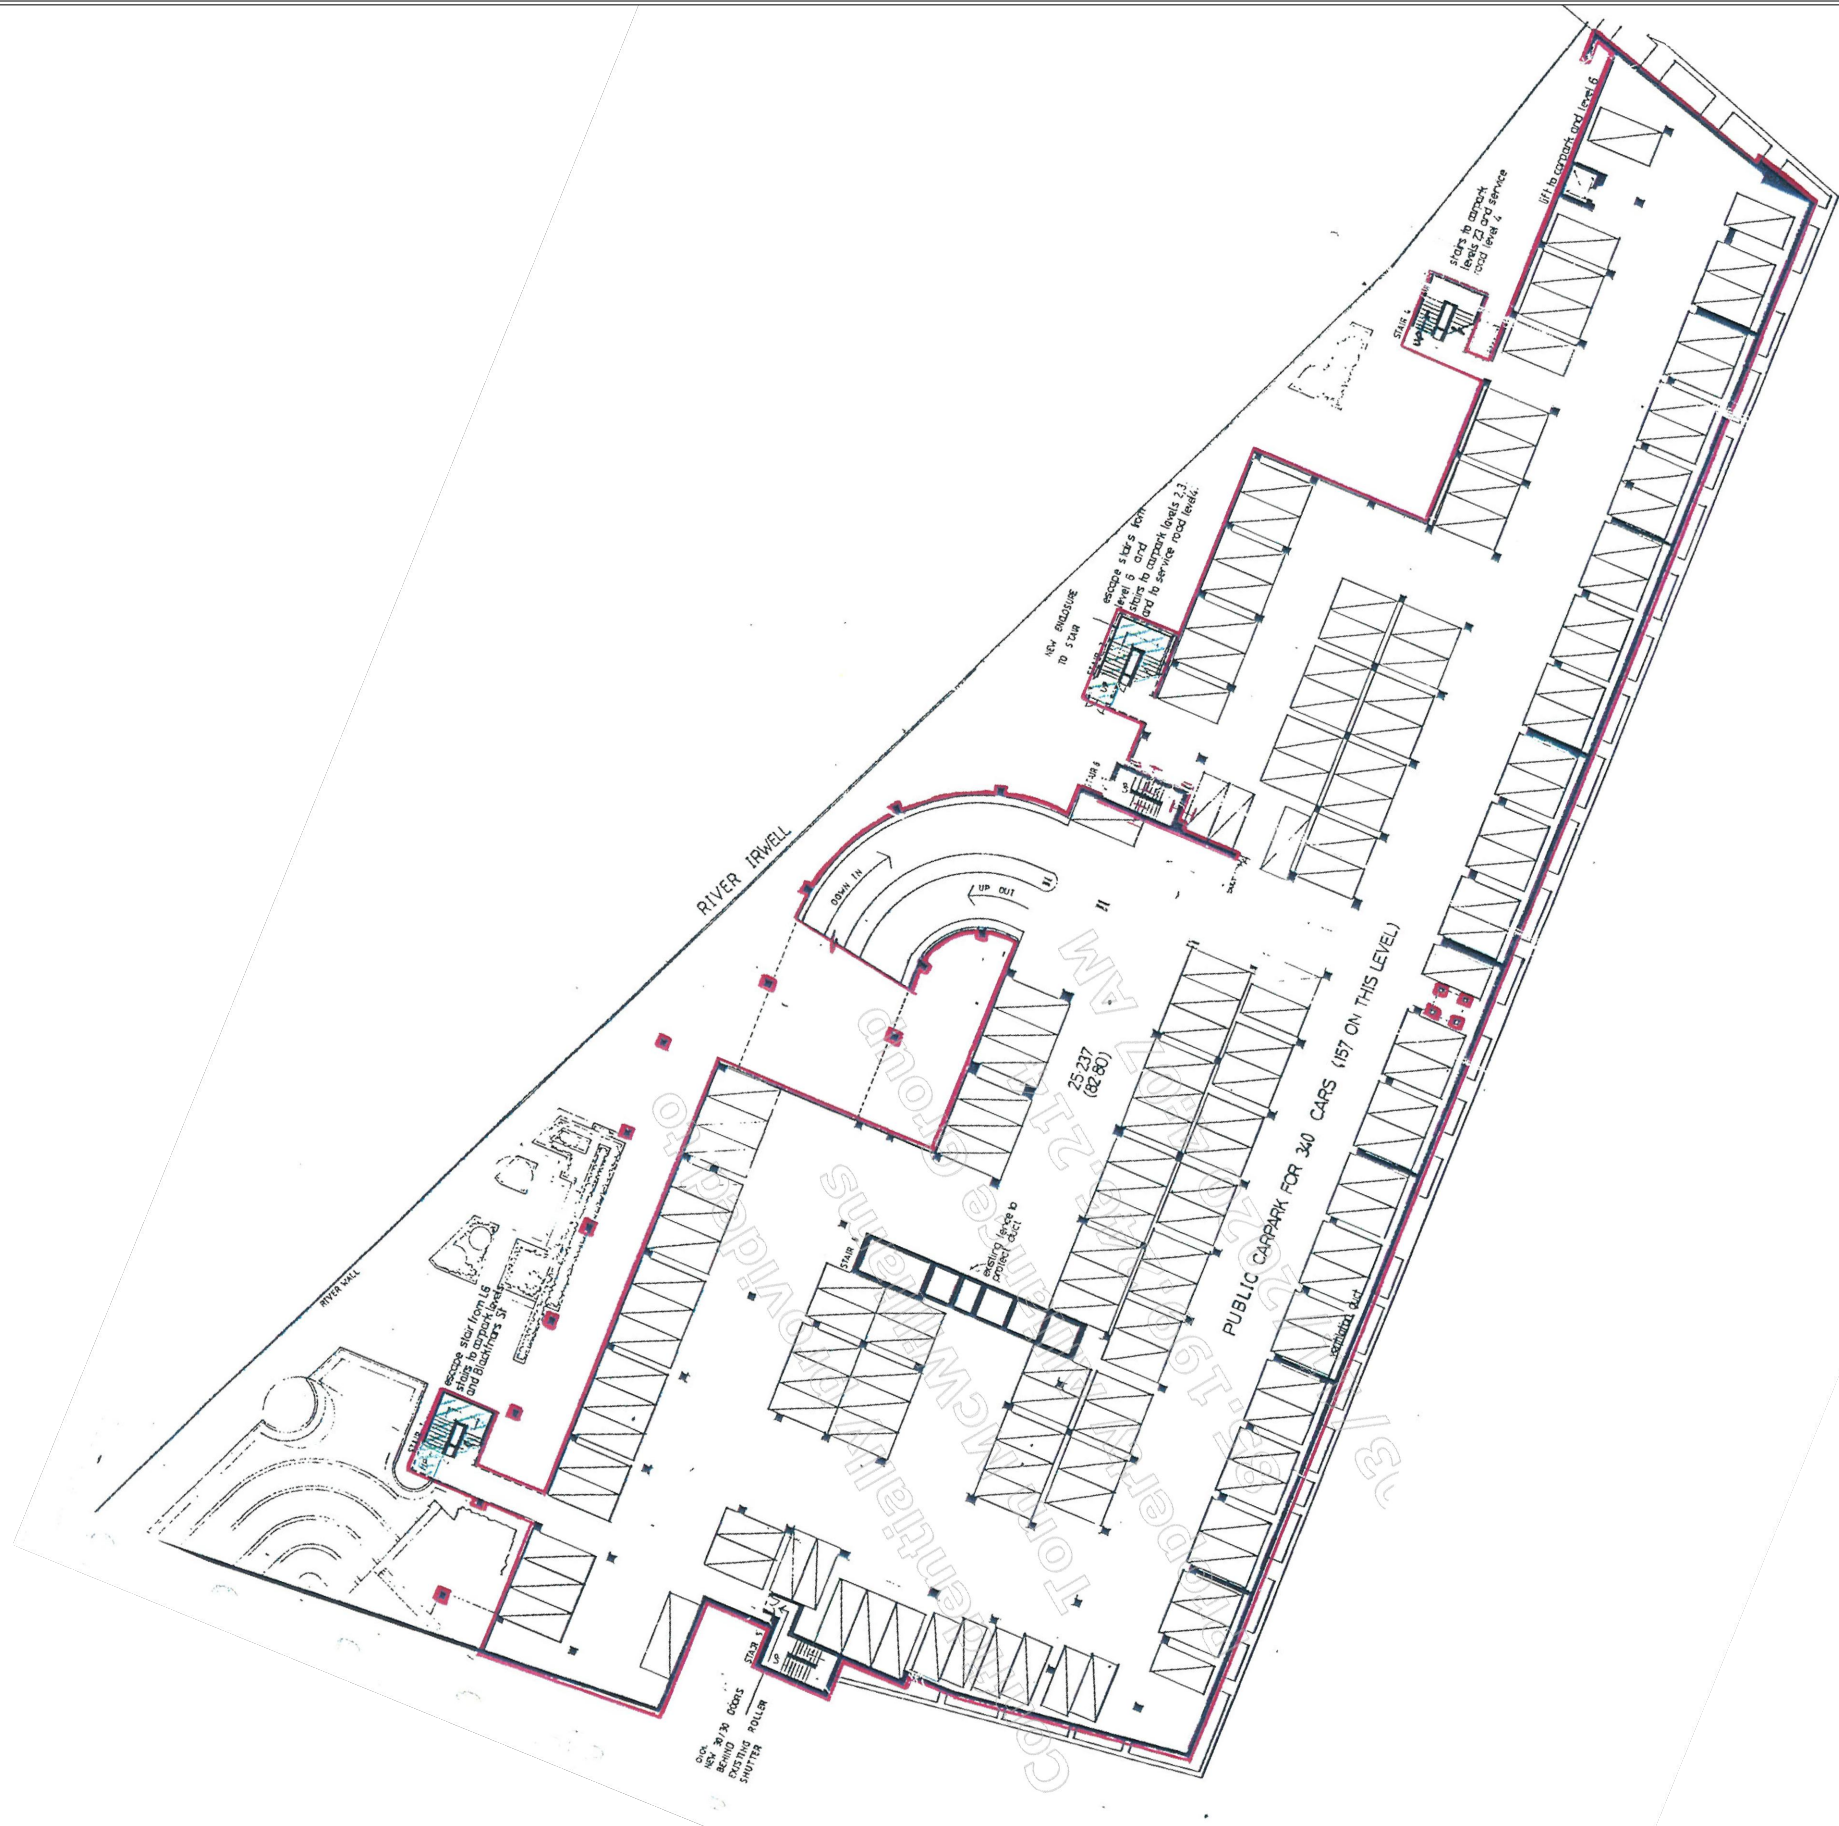DRAWINGS





Notes:				
P1	REVA	21.04.2021	LM	NS
Phase	Issue	Date	Drawn	Checked

Client:	Property Alliance Group Ltd
Job Title:	Renaissance Deansgate


Job No:	14-261
Drawing No:	002

Date:	21.04.2021
Scale:	NTS



Environmental Engineering Partnership Ltd
Taylor Road, Trafford Park
Urmston, Manchester, M41 7JQ
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

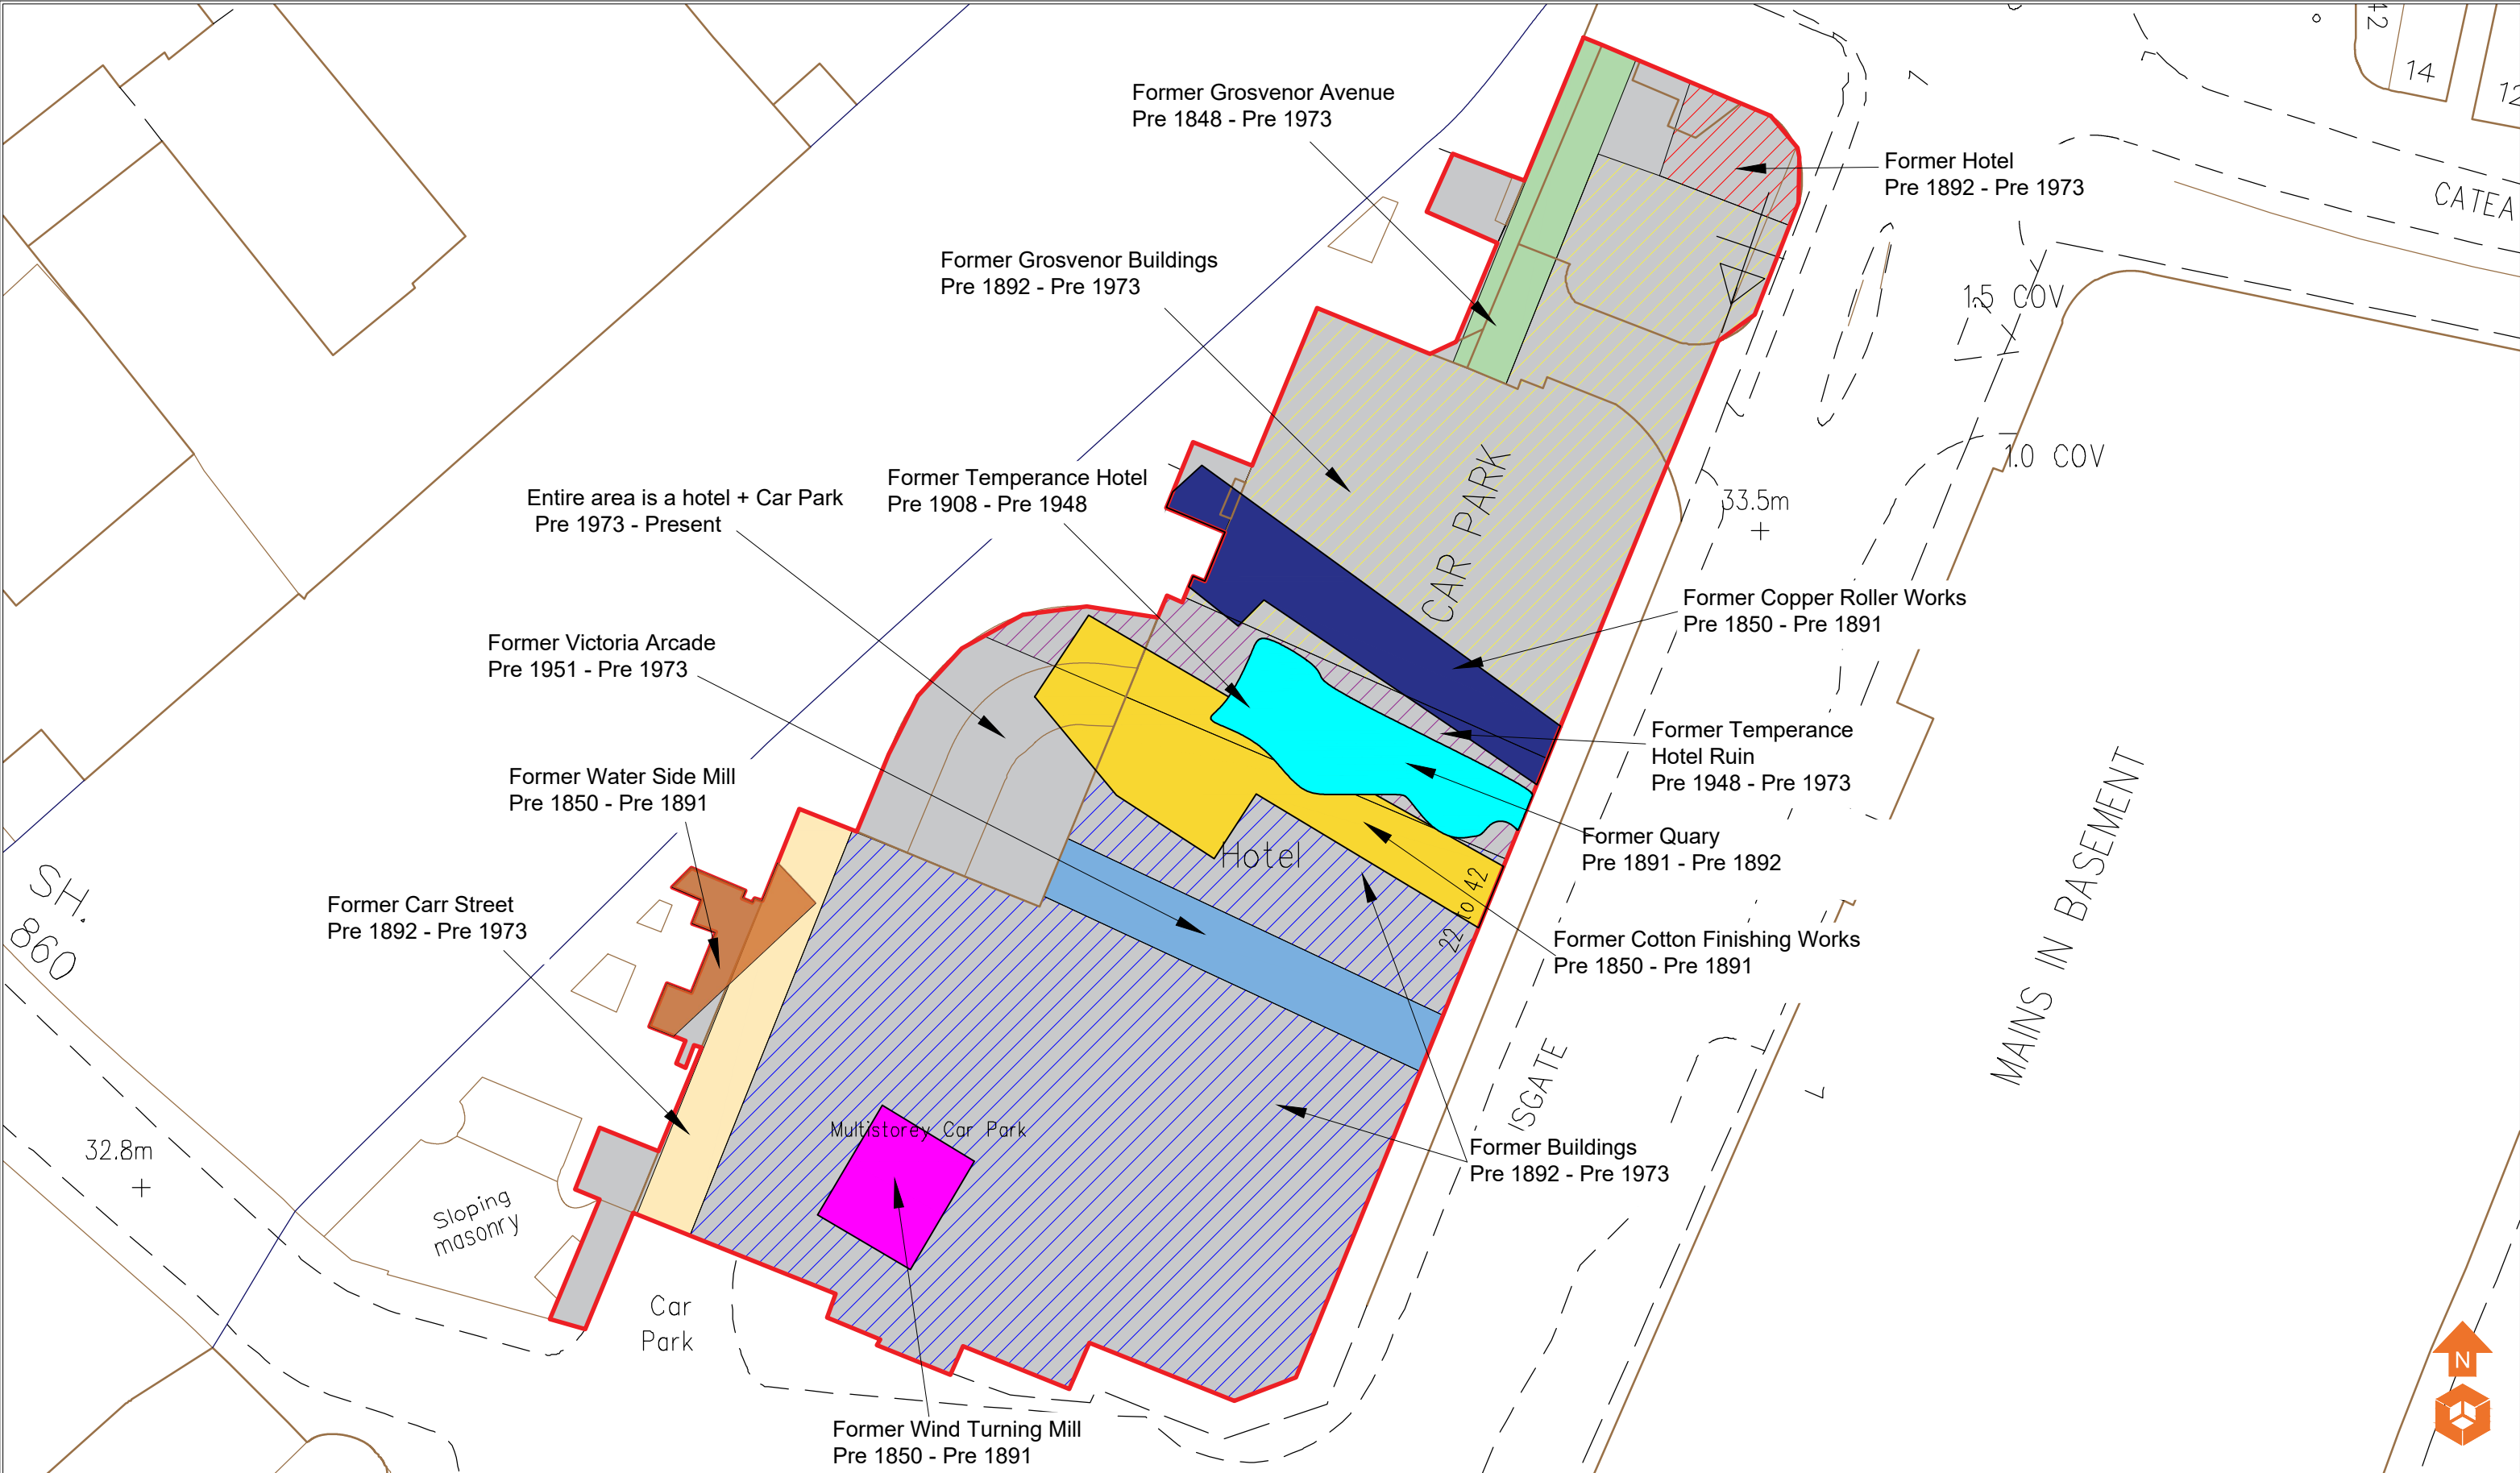The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.



Historical Features

Former Buildings

Former Carr Street

Former Victoria Arcade

Former Temperance Hotel

Former Grosvenor Building

Former Grosvenor Avenue

Former Hotel

Current Hotel and Car Park

Former Quarry

Former Wind Turning Mill

Former Cotton Finishing Works

Former Copper Roller Works

Former Water Side Mill

Notes:

P1	REVB	13.05.2021	EB	NS
P1	REVA	28.07.2020	LM	EF
Phase	Issue	Date	Drawn	Checked

Client:

Property Alliance Group Ltd

Job Title:

Renaissance Deansgate

Job No:

14-261

Drawing No:

003

Drawing Title:

Historical Features Plan

Date:

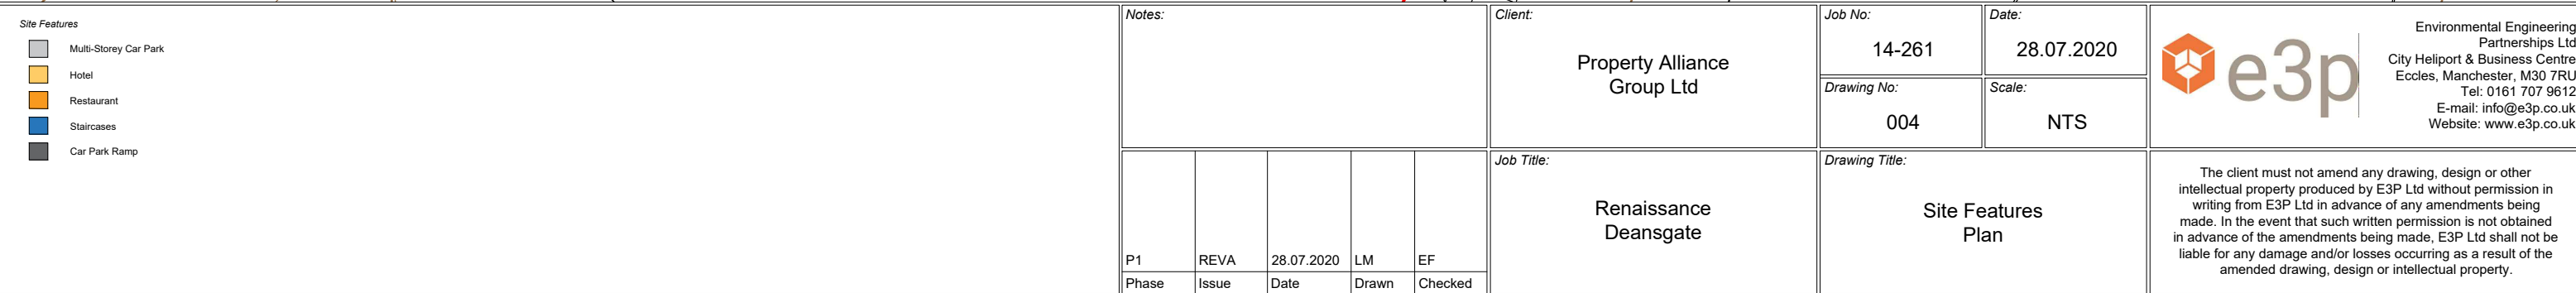
13.05.2021

Scale:

NTS

Environmental Engineering Partnerships Ltd
City Heliport & Business Centre
Eccles, Manchester, M30 7RU
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.





Location Symbols

Approximate Core Through Wall Location

Approximate Trial Pit Location

Approximate Rotary Borehole Location with Install

Made Ground Depth (m)

Depth of Made Ground 0.00 - 0.24m

Depth of Made Ground 0.25 - 0.49m

Depth of Made Ground 0.50 - 0.74m

Depth of Made Ground 0.75 - 0.99m

Depth of Made Ground 1.00 - 1.24m

Depth of Made Ground 1.25 - 1.49m

Depth of Made Ground 1.50 - 1.74m

Depth of Made Ground 1.75 - 1.99m

Depth of Made Ground >2.00m

Notes:

P1	REVA	07.04.2021	EB	NS
Phase	Issue	Date	Drawn	Checked

Client:

Property Alliance Group Ltd

Renaissance Deansgate

Job No:

14-261

Date:

07.04.2021

Drawing No:

006

Scale:

NTS

Drawing Title:

Depth Of Made Ground Plan

Environmental Engineering Partnership Ltd

Taylor Road, Trafford Park

Urmston, Manchester, M41 7JG

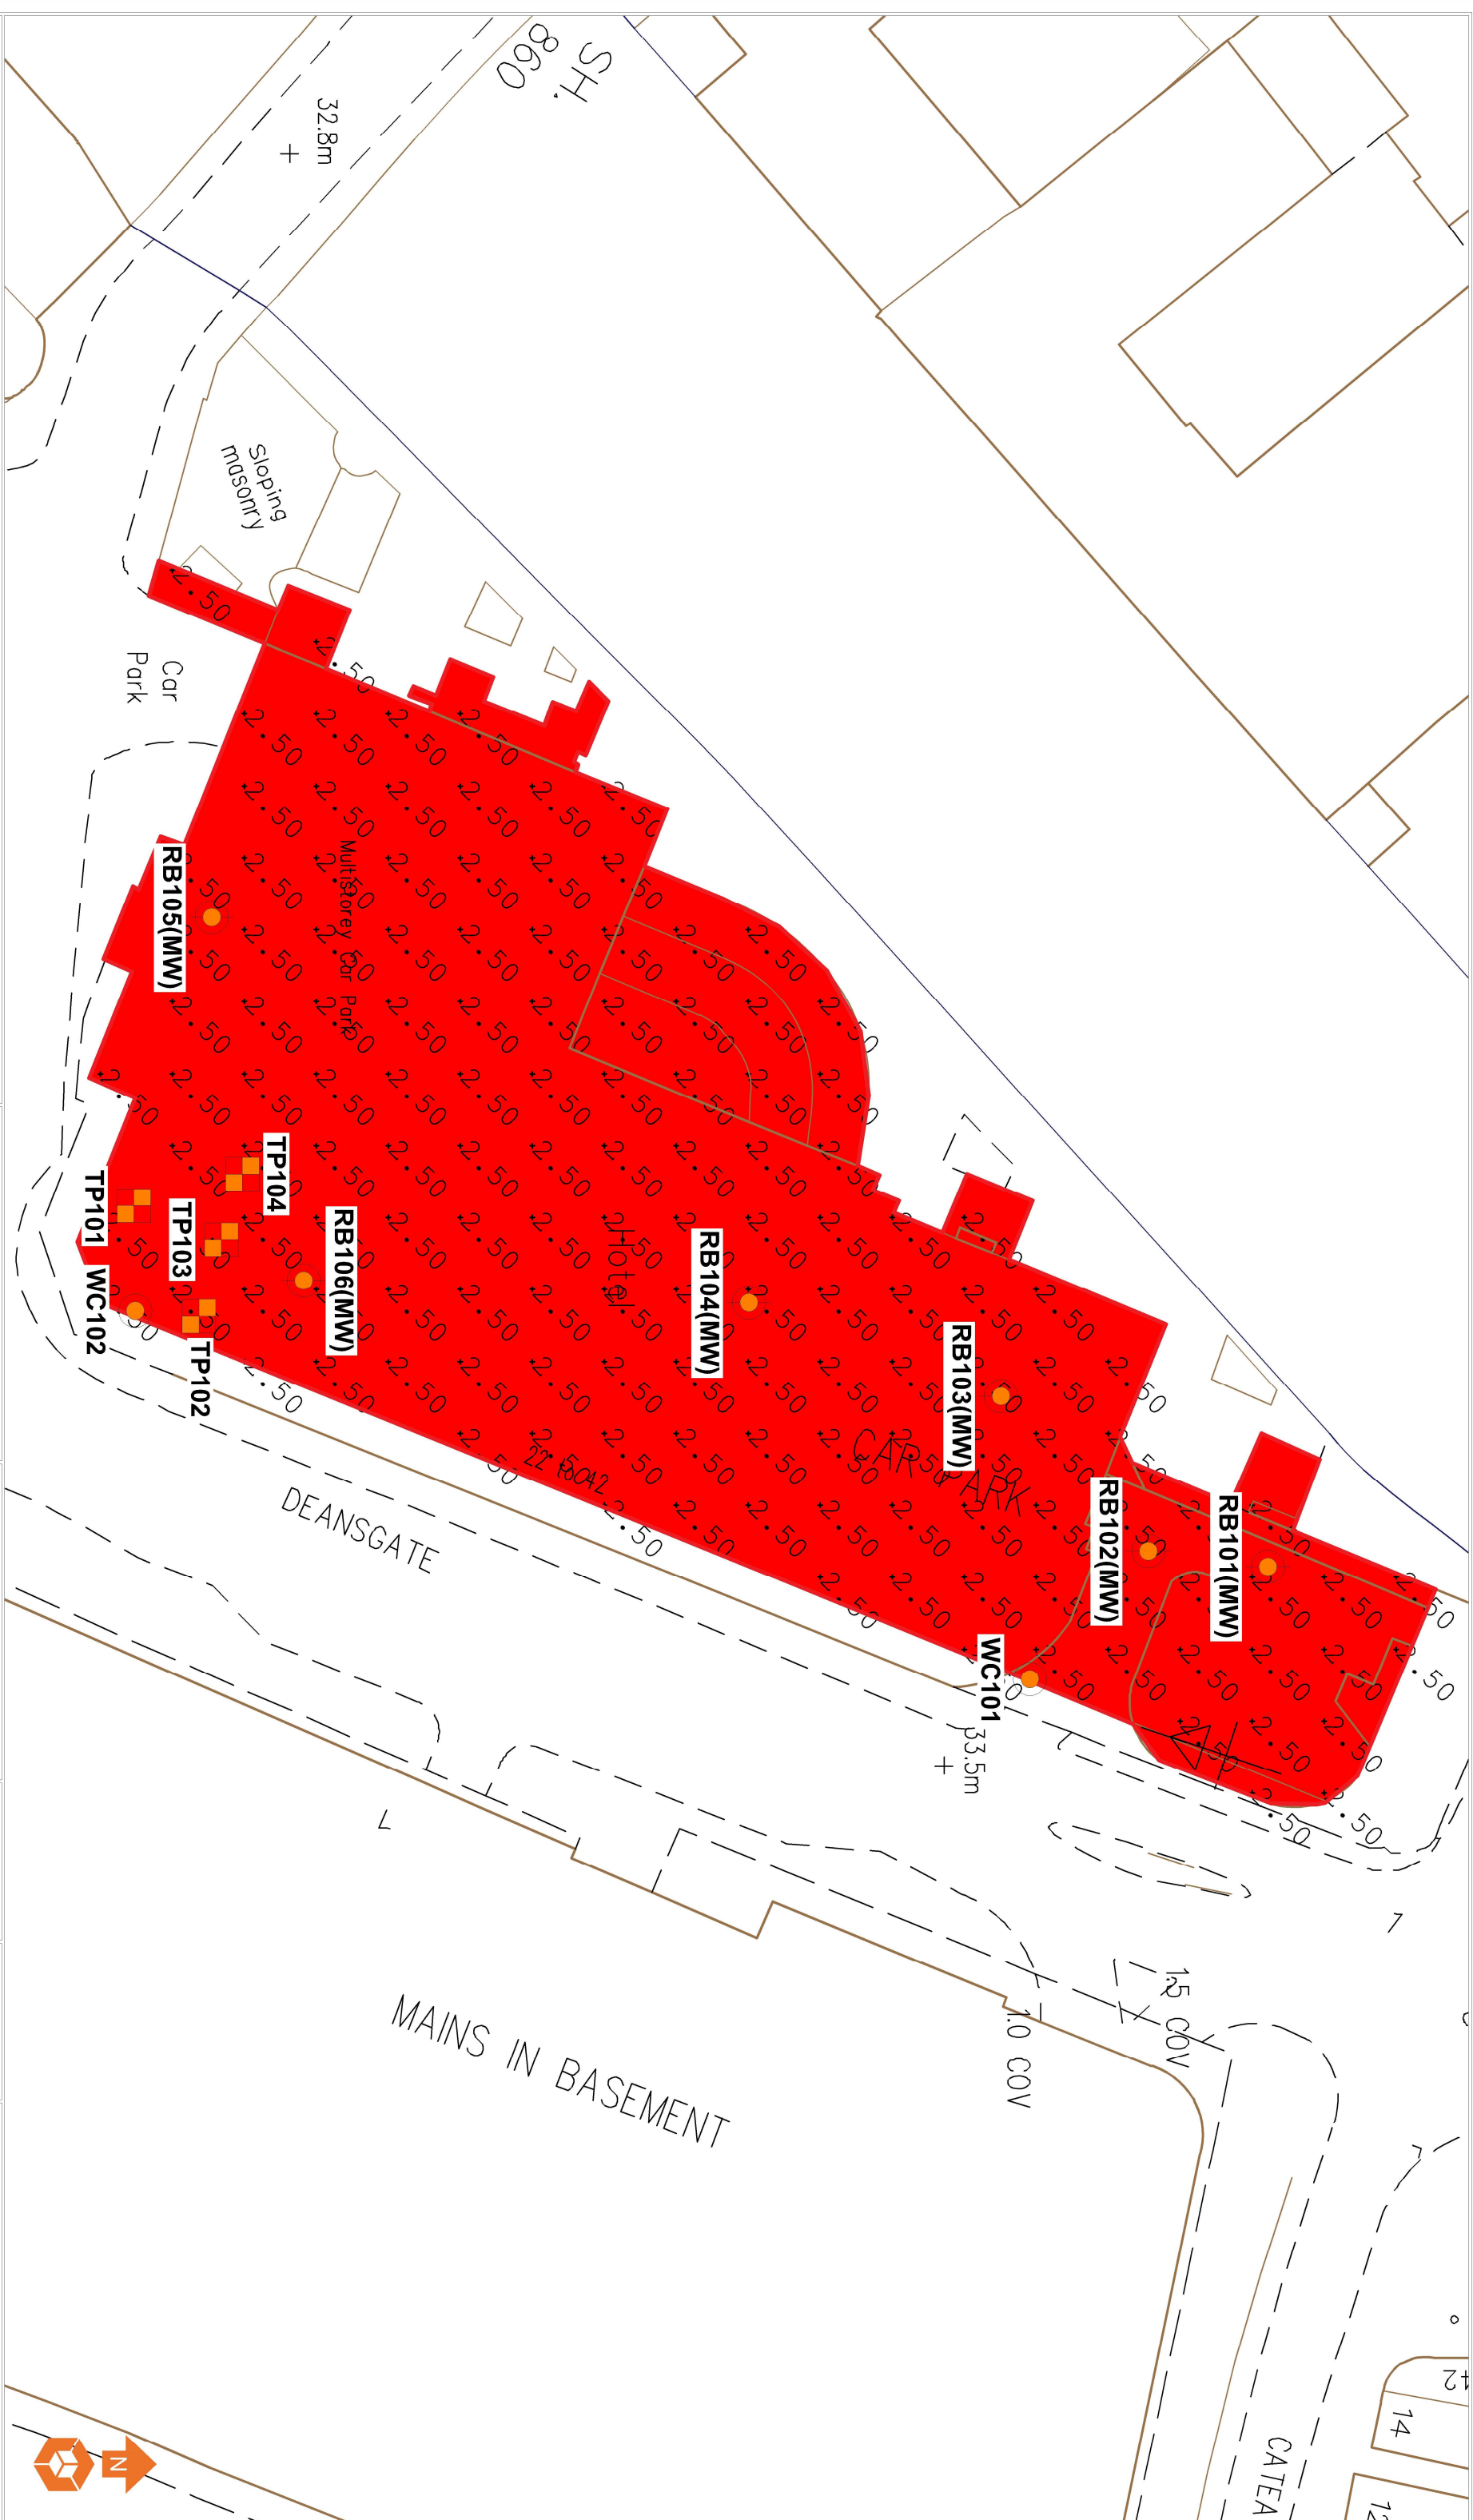
Tel: 0161 707 9612

E-mail: info@e3p.co.uk


Website: www.e3p.co.uk

The client must not amend any drawing, design or other intellectual property produced by E3p Ltd without permission in writing from E3p Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3p Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.





Location Symbols  Shallow Spread Footings  Approximate Core Through Wall location  Approximate Trial Pit location  Approximate Rotary Borehole Location with Install				Shallow Spread Footings Depth to Founding Strata 0.00' - 1.24m Depth to Founding Strata 1.26' - 1.49m Mass Trench/Fill Footings Depth to Founding Strata 1.50' - 1.74m Depth to Founding Strata 1.76' - 1.99m Depth to Founding Strata 2.00' - 2.24m Engineered Footings Depth to Founding Strata 2.26' - 2.49m Depth to Founding Strata >2.50m			
Notes:		Client:		Job No:		Date:	
				Property Alliance Group Ltd		14-261	
						07.04.2021	
		Job Title:		Drawing No:		Scale:	
		Renaissance Deansgate		008		NTS	
		Drawing Title:		Depth Of Founding Strata Plan			
P1		REVA	07.04.2021	EB	NS		
Phase	Issue	Date	Drawn	Checked			


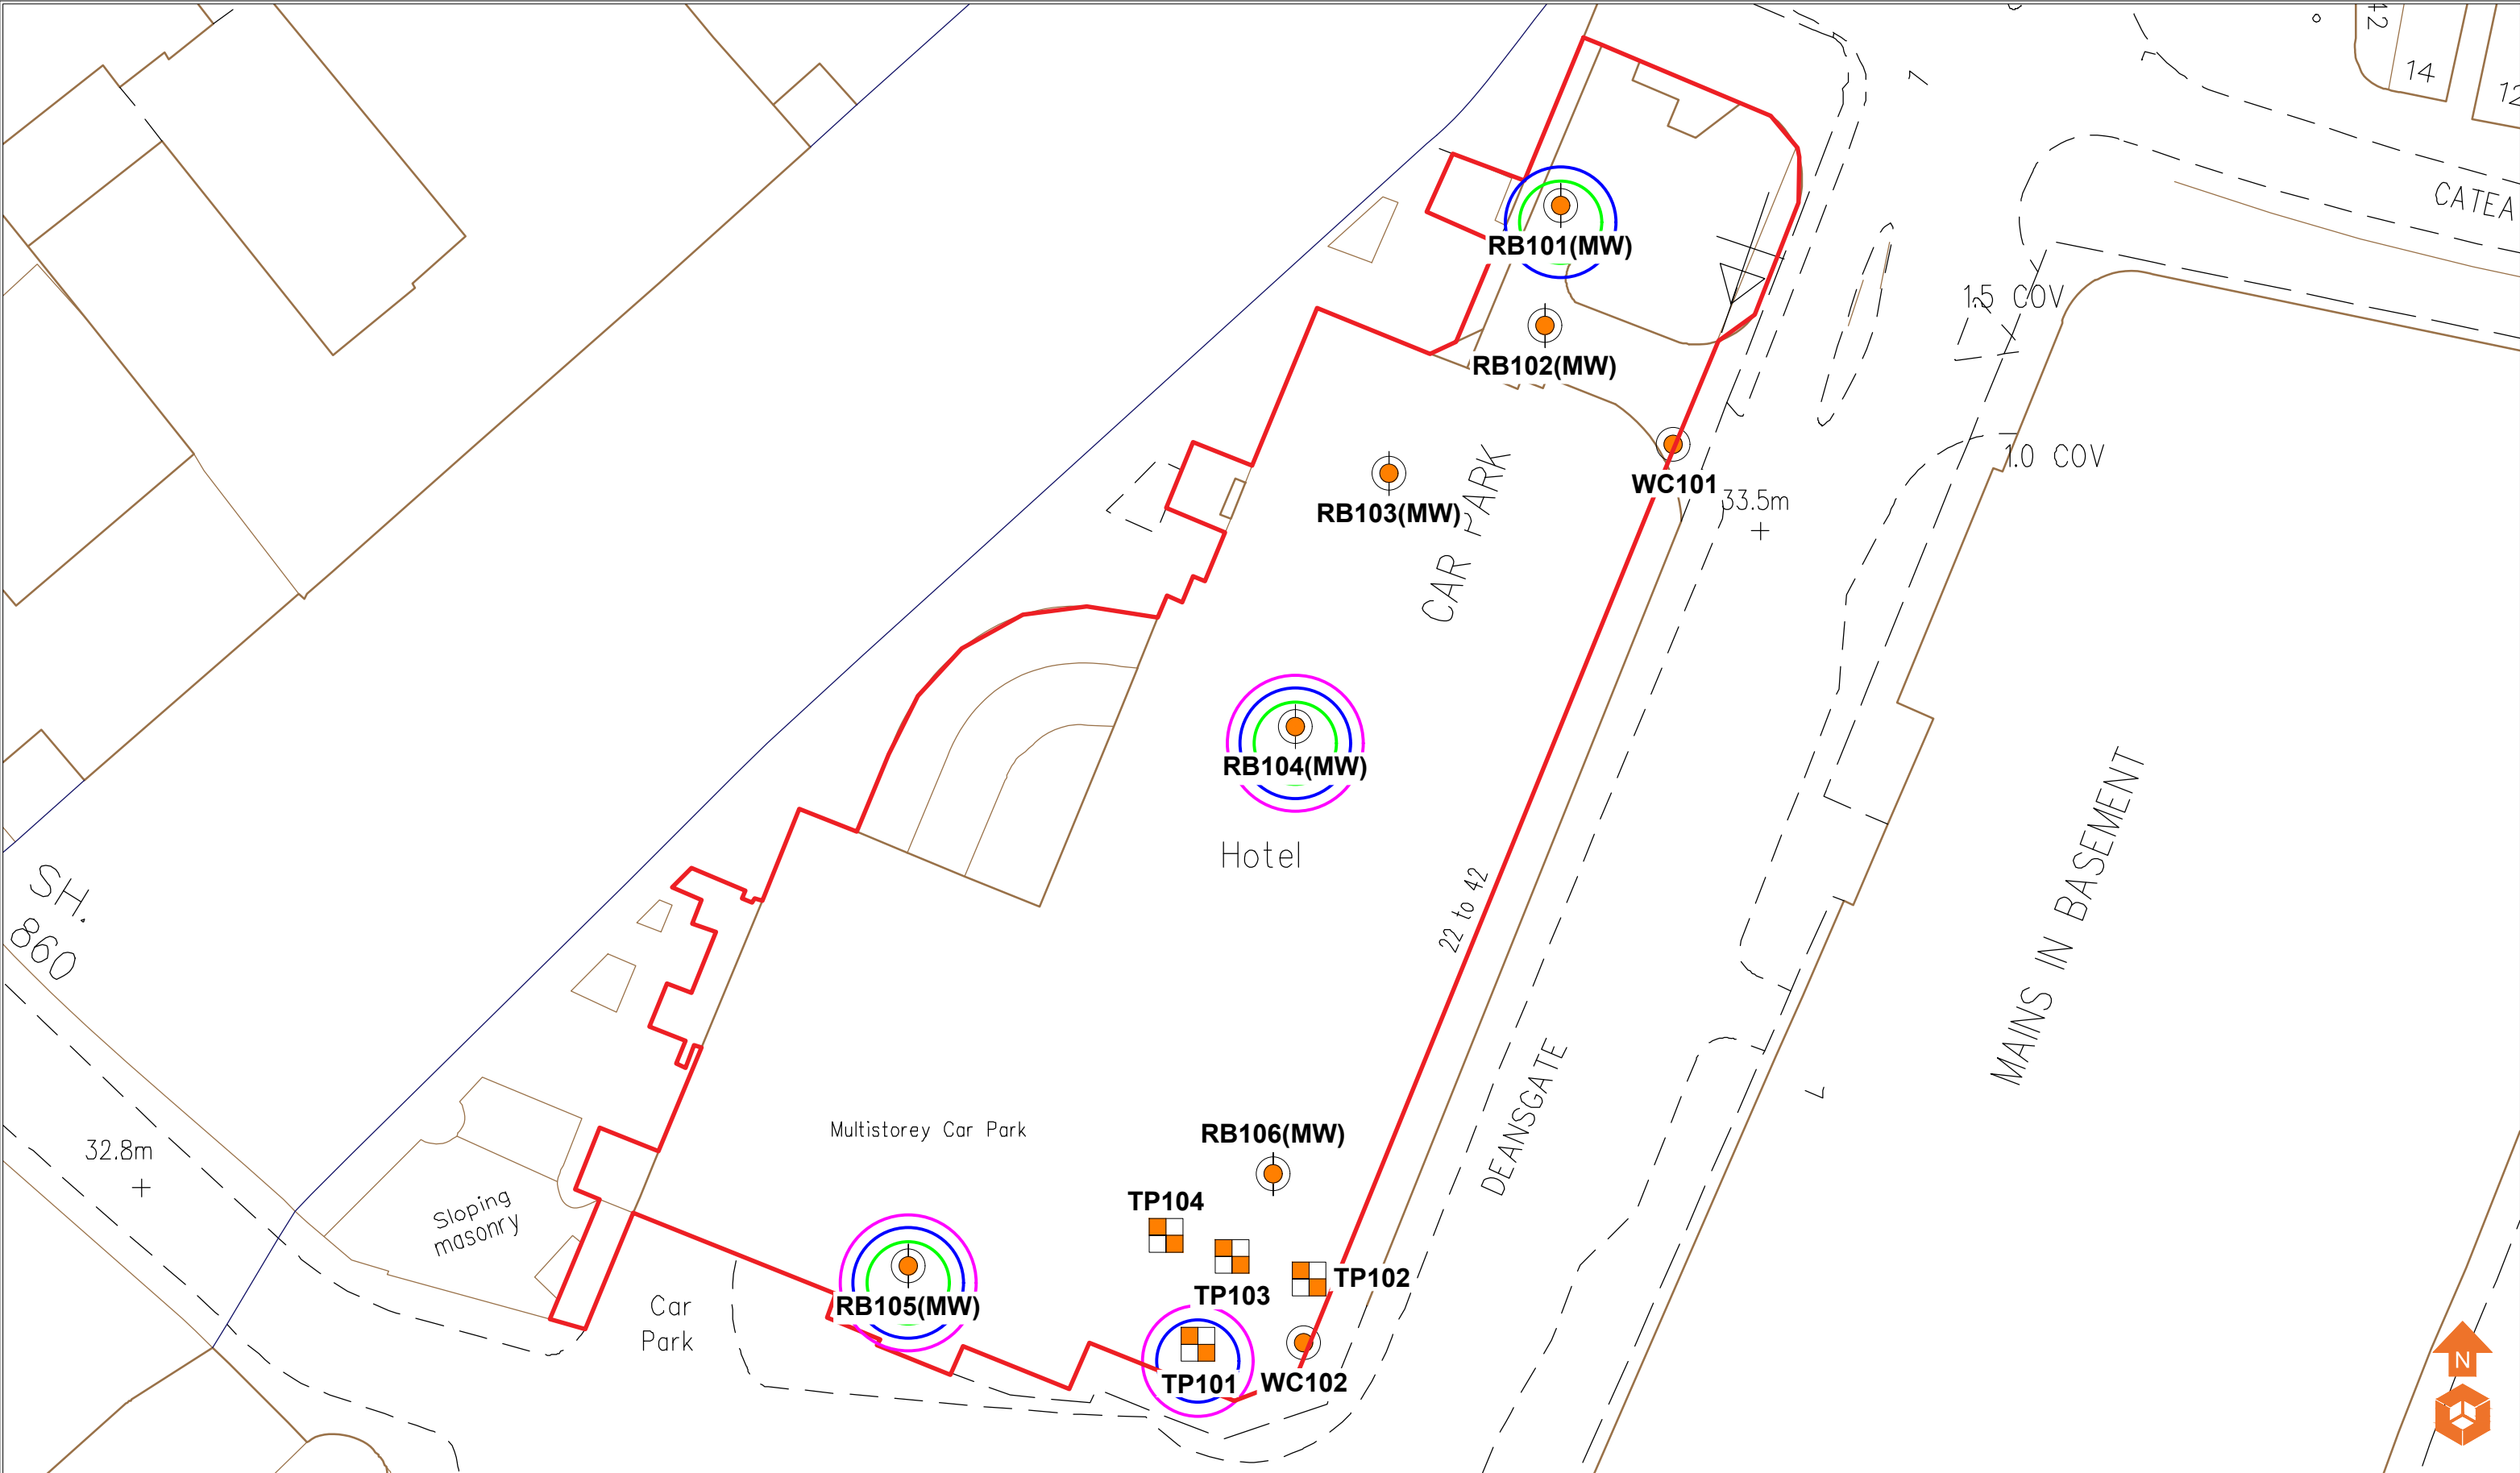


Location Symbols  Approximate Core Through Wall Location  Approximate Trial Pit Location  Approximate Rotary Borehole Location with Install					Contaminants  Heavy Metals  PH  Trichloromethane					Notes:					Client: Property Alliance Group Ltd		Job No: 14-261	Date: 13.05.2021	 Environmental Engineering Partnership Ltd Taylor Road, Trafford Park Urmston, Manchester, M41 7JQ Tel: 0161 707 9612 E-mail: info@e3p.co.uk Website: www.e3p.co.uk													
					<table><tr><td>P1</td><td>REVB</td><td>13.05.2021</td><td>EB</td><td>NS</td></tr><tr><td>P1</td><td>REVA</td><td>07.04.2021</td><td>EB</td><td>NS</td></tr><tr><td>Phase</td><td>Issue</td><td>Date</td><td>Drawn</td><td>Checked</td></tr></table>					P1	REVB	13.05.2021	EB	NS	P1	REVA	07.04.2021	EB	NS	Phase	Issue	Date	Drawn	Checked	Job Title: Renaissance Deansgate		Drawing No: 019		Scale: NTS		The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.	
P1	REVB	13.05.2021	EB	NS																												
P1	REVA	07.04.2021	EB	NS																												
Phase	Issue	Date	Drawn	Checked																												
										Drawing Title: Contamination Issues Plan - Controlled Waters																						

TP101

West

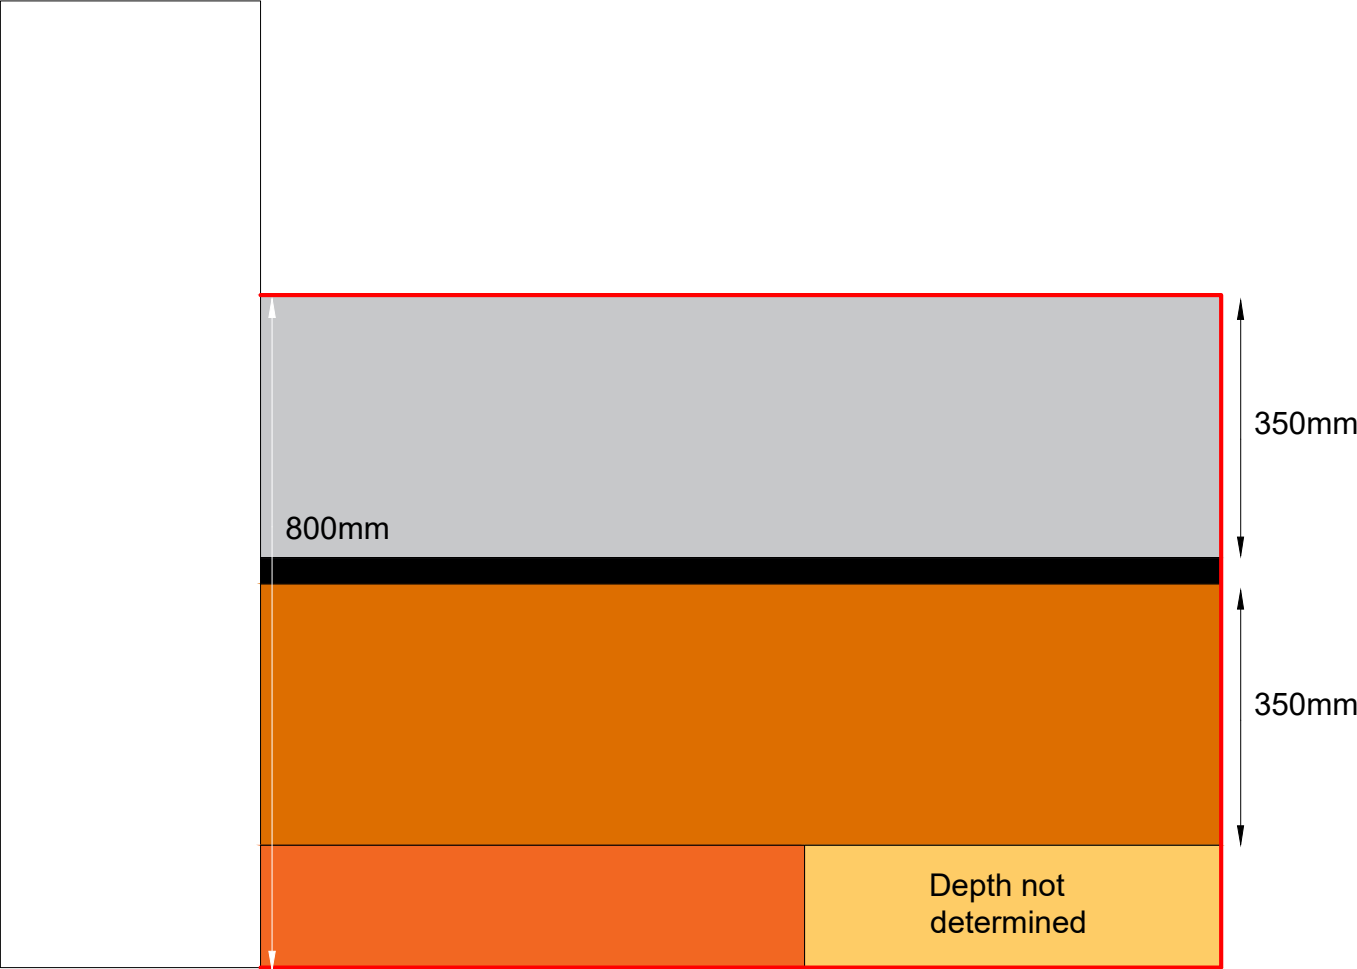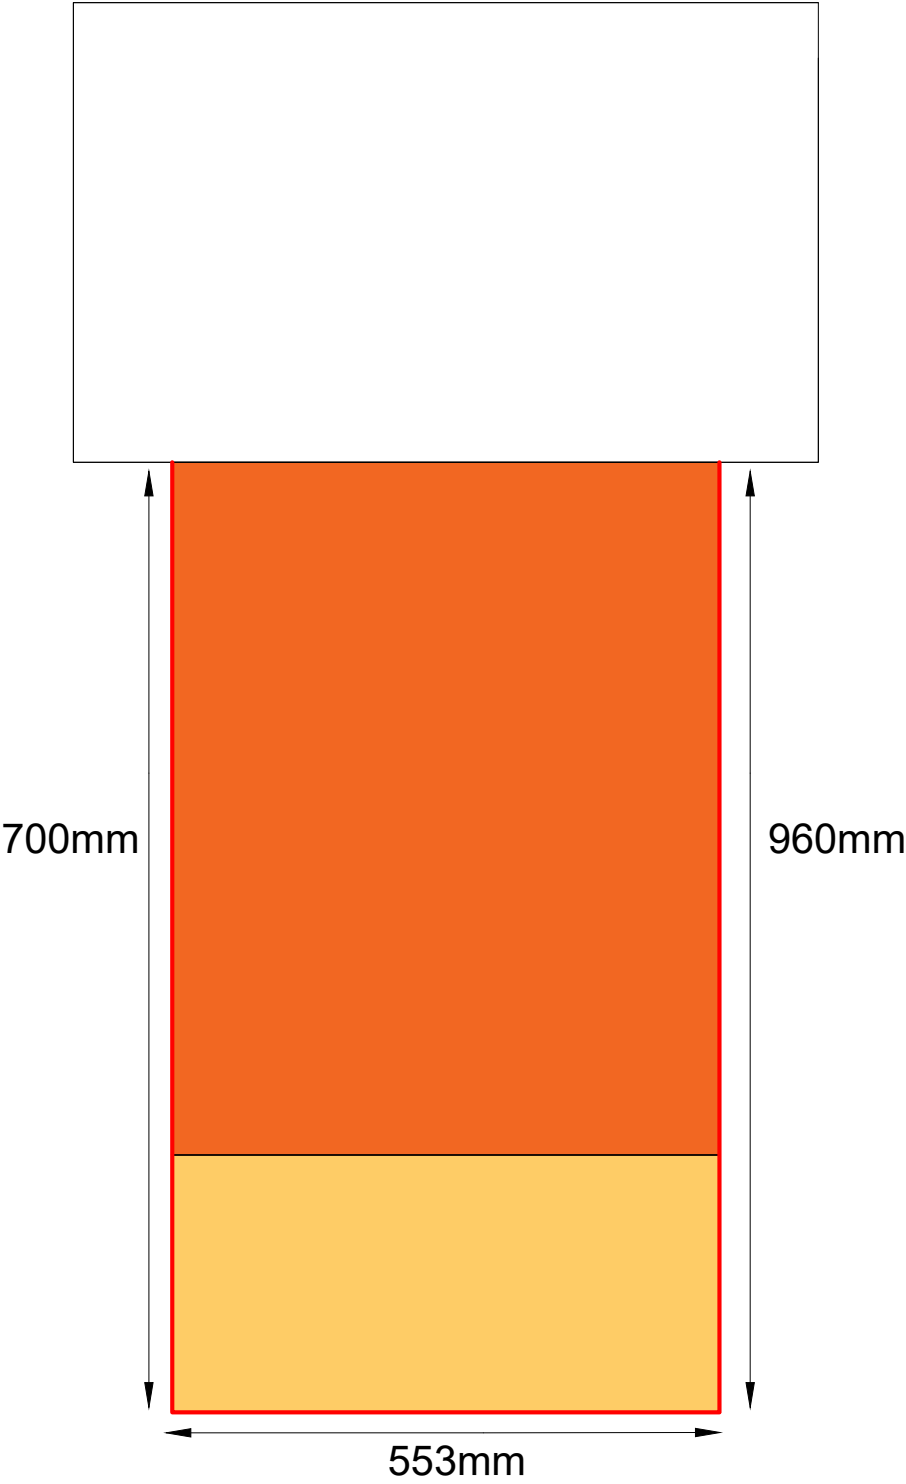West



Foundation Pit Details

- Concrete Pillar
- Foundation Slab
- Concrete
- Sandstone
- Made Ground - Brown Gravelly Sand.
- Site won natural backfill
- Rubber Membrane
- Trial Pit

Notes:

P1	REVA	12.03.2021	LM	JC
Phase	Issue	Date	Drawn	Checked

Client:

Property Alliance
Group Ltd

Job Title:

Renaissance
Deansgate

Job No:

14-261

Drawing No:

023

Date:

12.03.2021

Scale:

NTS

Drawing Title:

Foundation Pit Details - TP101





Environmental Engineering
Partnerships Ltd
City Heliport & Business Centre
Eccles, Manchester, M30 7RU
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

TP102

West

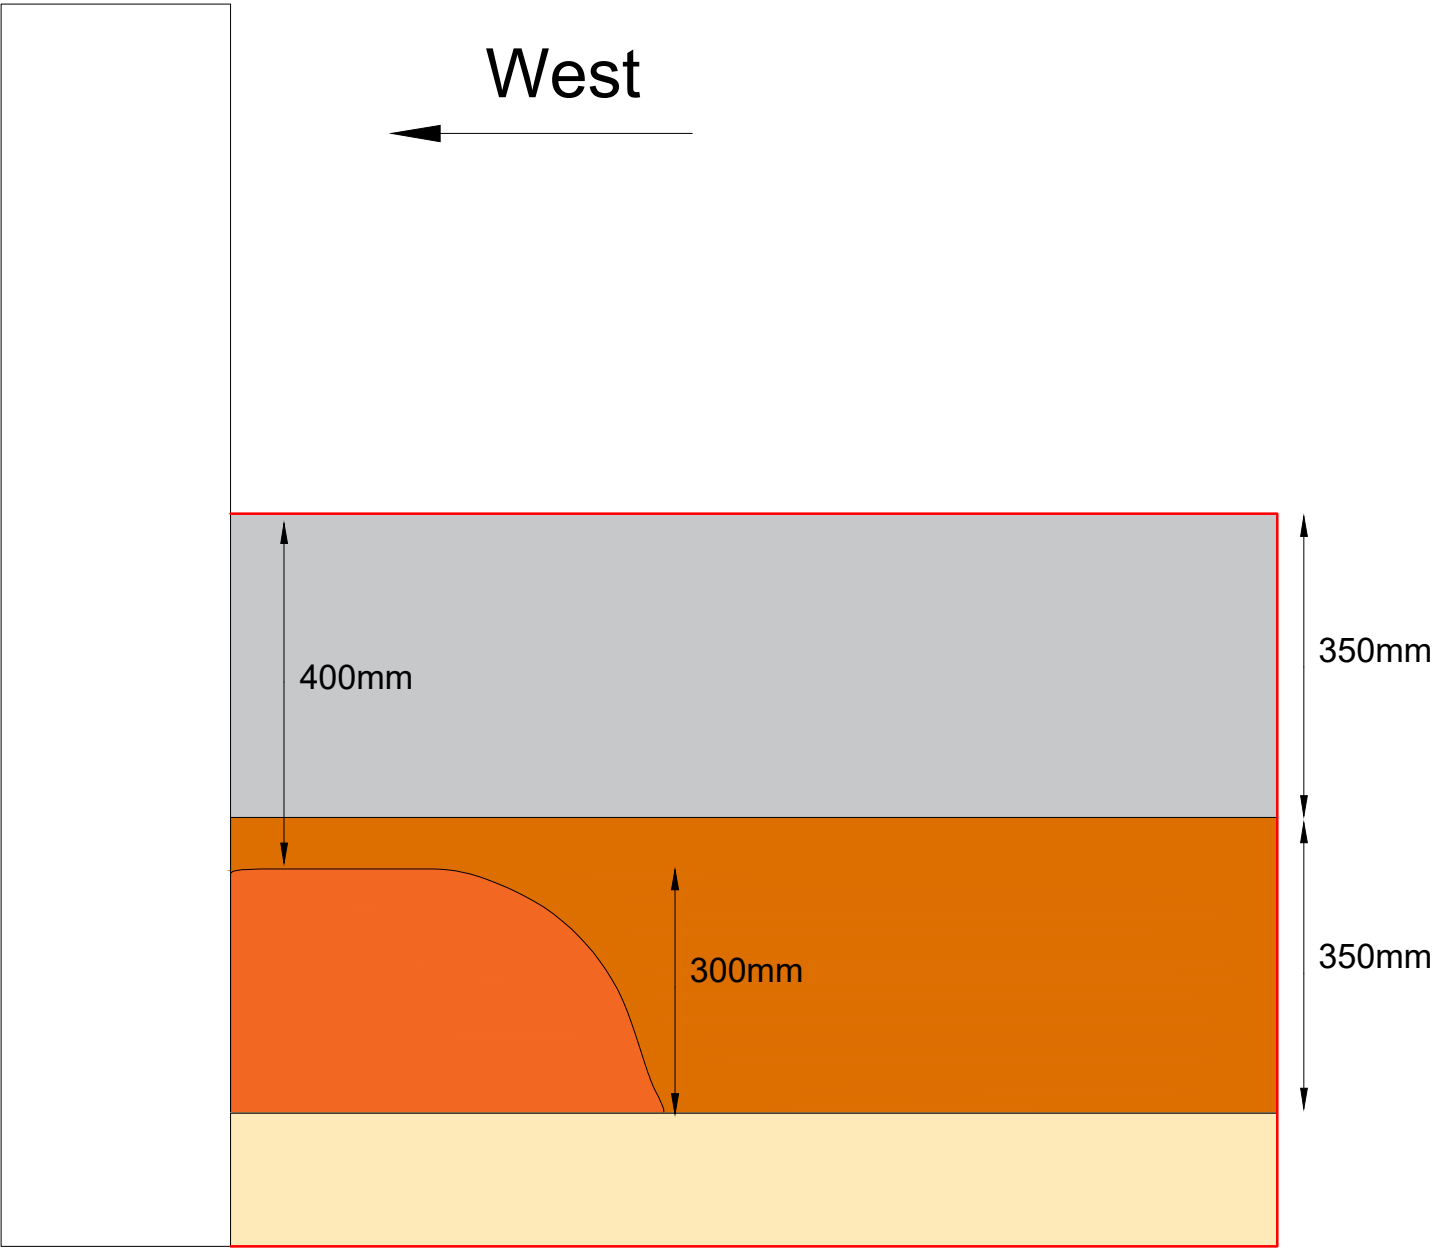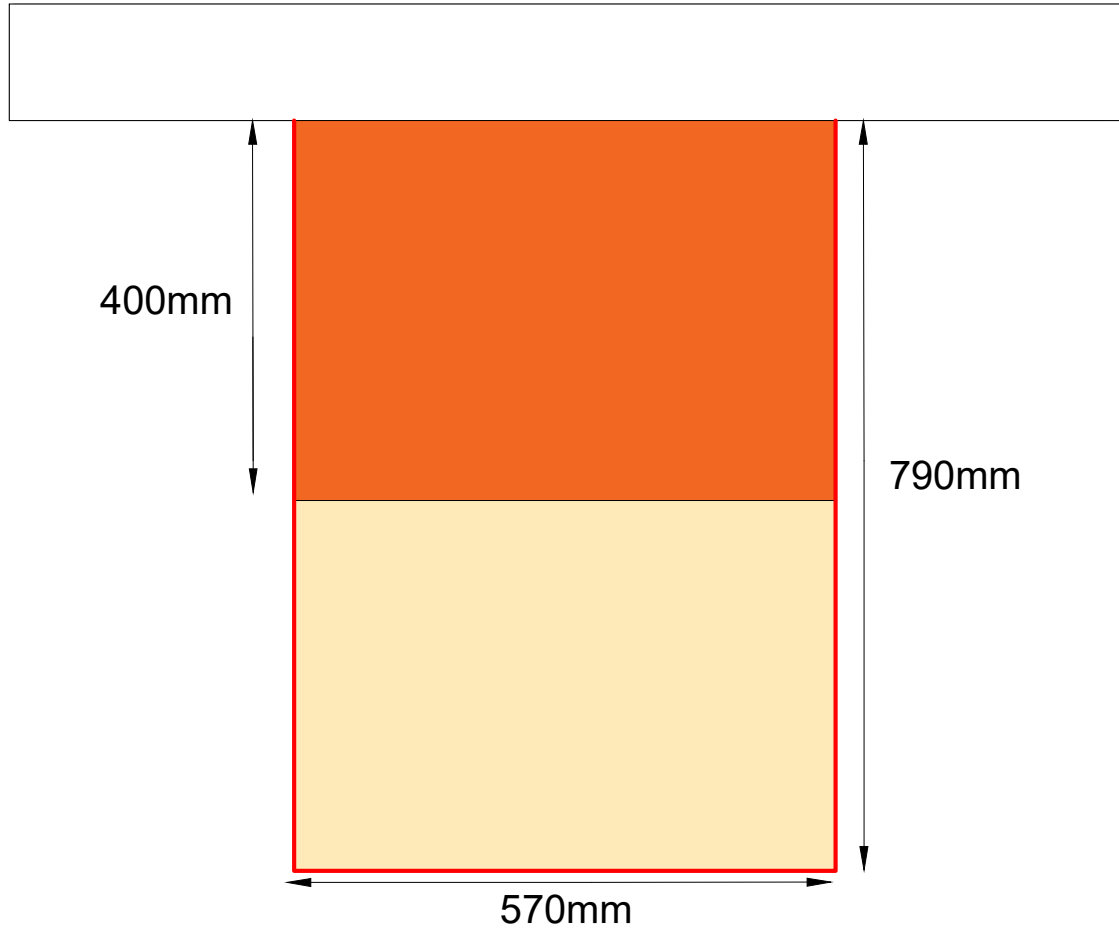West





Foundation Pit Details Concrete Pillar Foundation Slab Concrete Sandstone Made Ground - Brown Gravelly Sand. Site won natural backfill Rubber Membrane Trial Pit	Notes:	Client: Property Alliance Group Ltd	Job No: 14-261	Date: 12.03.2021	e3p Environmental Engineering Partnerships Ltd City Heliport & Business Centre Eccles, Manchester, M30 7RU Tel: 0161 707 9612 E-mail: info@e3p.co.uk Website: www.e3p.co.uk
P1 REVA 12.03.2021 LM JC Phase Issue Date Drawn Checked	Job Title: Renaissance Deansgate	Drawing No: 023	Scale: NTS	Drawing Title: Foundation Pit Details - TP102	The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

South





TP103

South



700mm

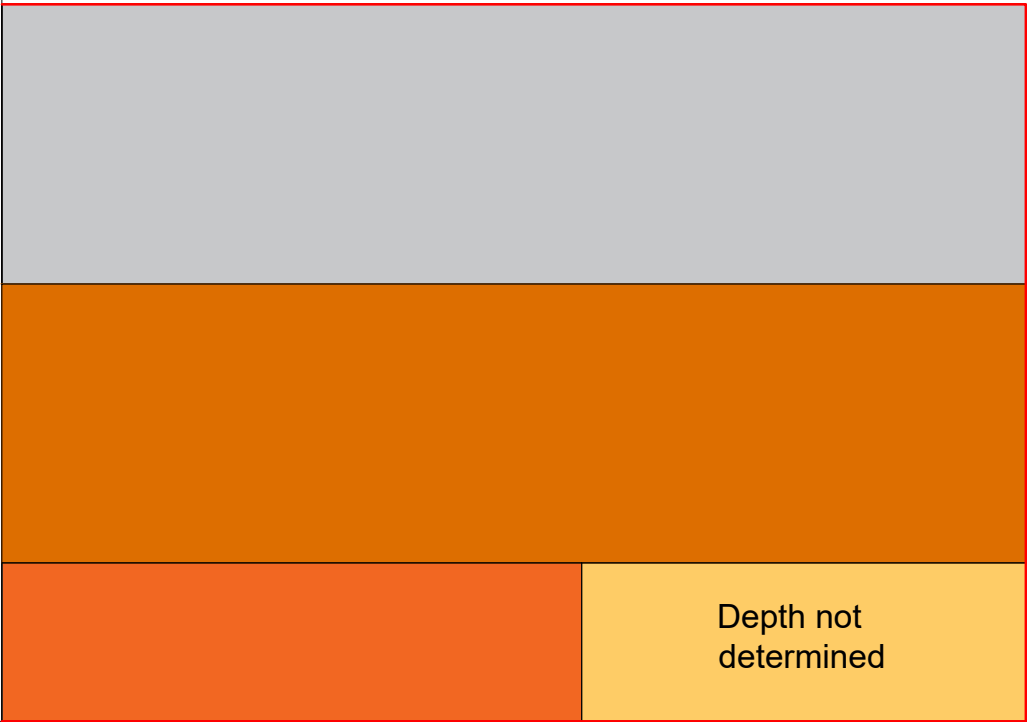780mm



350mm

350mm

Depth not
determined



Foundation Pit Details

- Concrete Pillar
- Foundation Slab
- Concrete
- Sandstone
- Made Ground - Brown Gravelly Sand.
Site won natural backfill
- Rubber Membrane
- Trial Pit

Notes:

P1	REVA	12.03.2021	LM	JC
Phase	Issue	Date	Drawn	Checked

Client:

Property Alliance
Group Ltd

Job Title:

Renaissance
Deansgate

Job No:

14-261

Drawing No:

023

Date:

12.03.2021

Scale:

NTS



Environmental Engineering
Partnerships Ltd
City Heliport & Business Centre
Eccles, Manchester, M30 7RU
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk



Foundation Pit Details - TP103

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

TP104

West

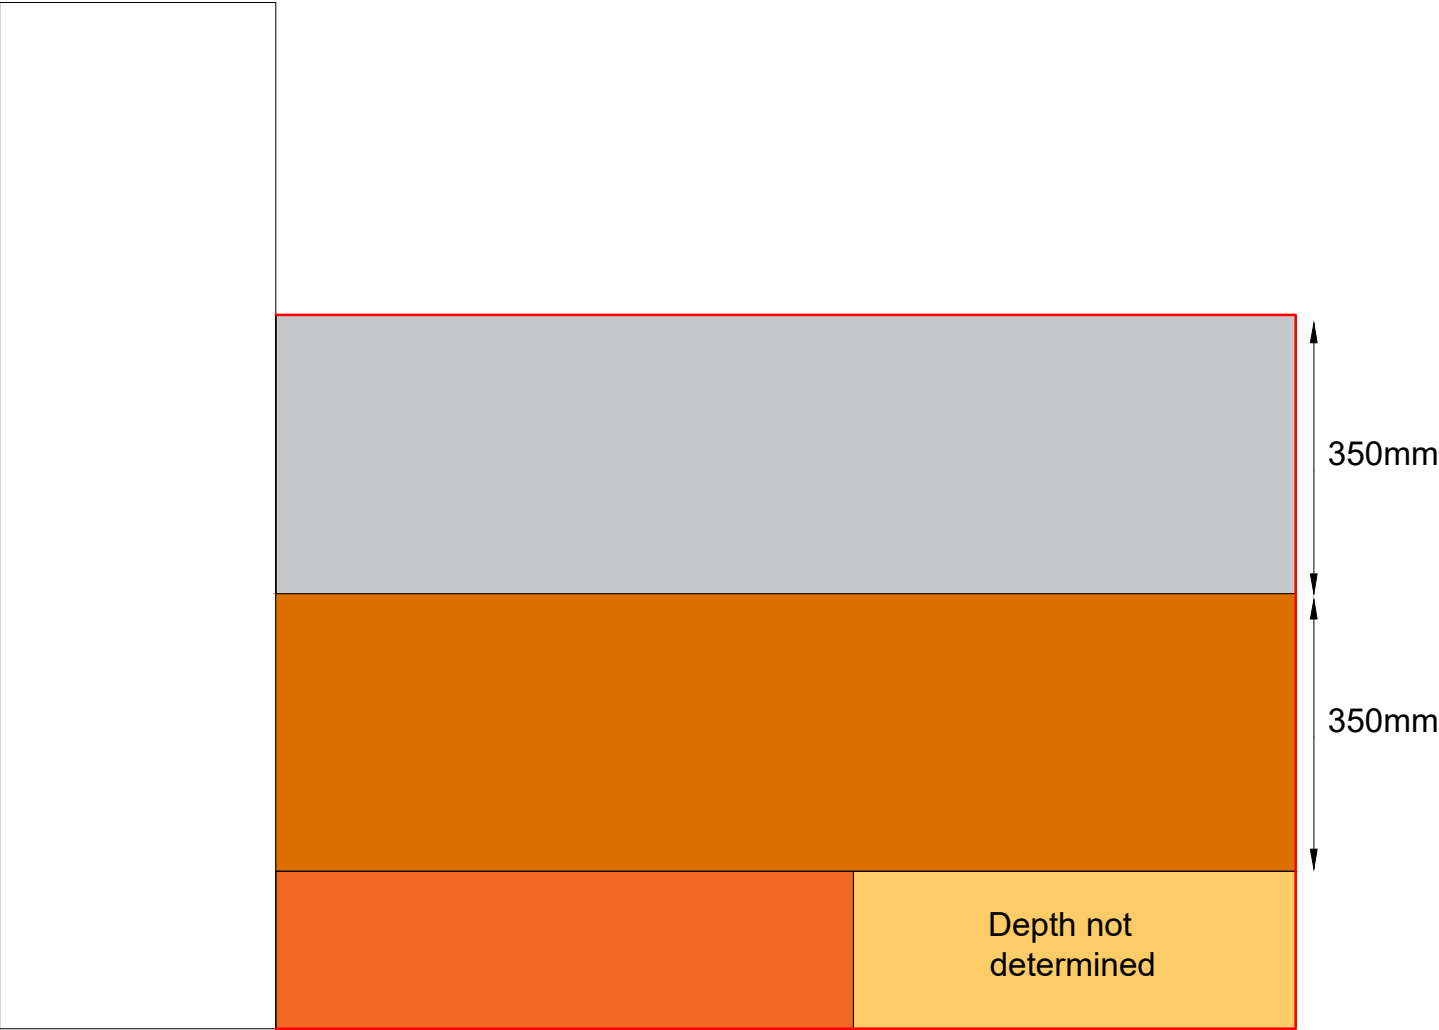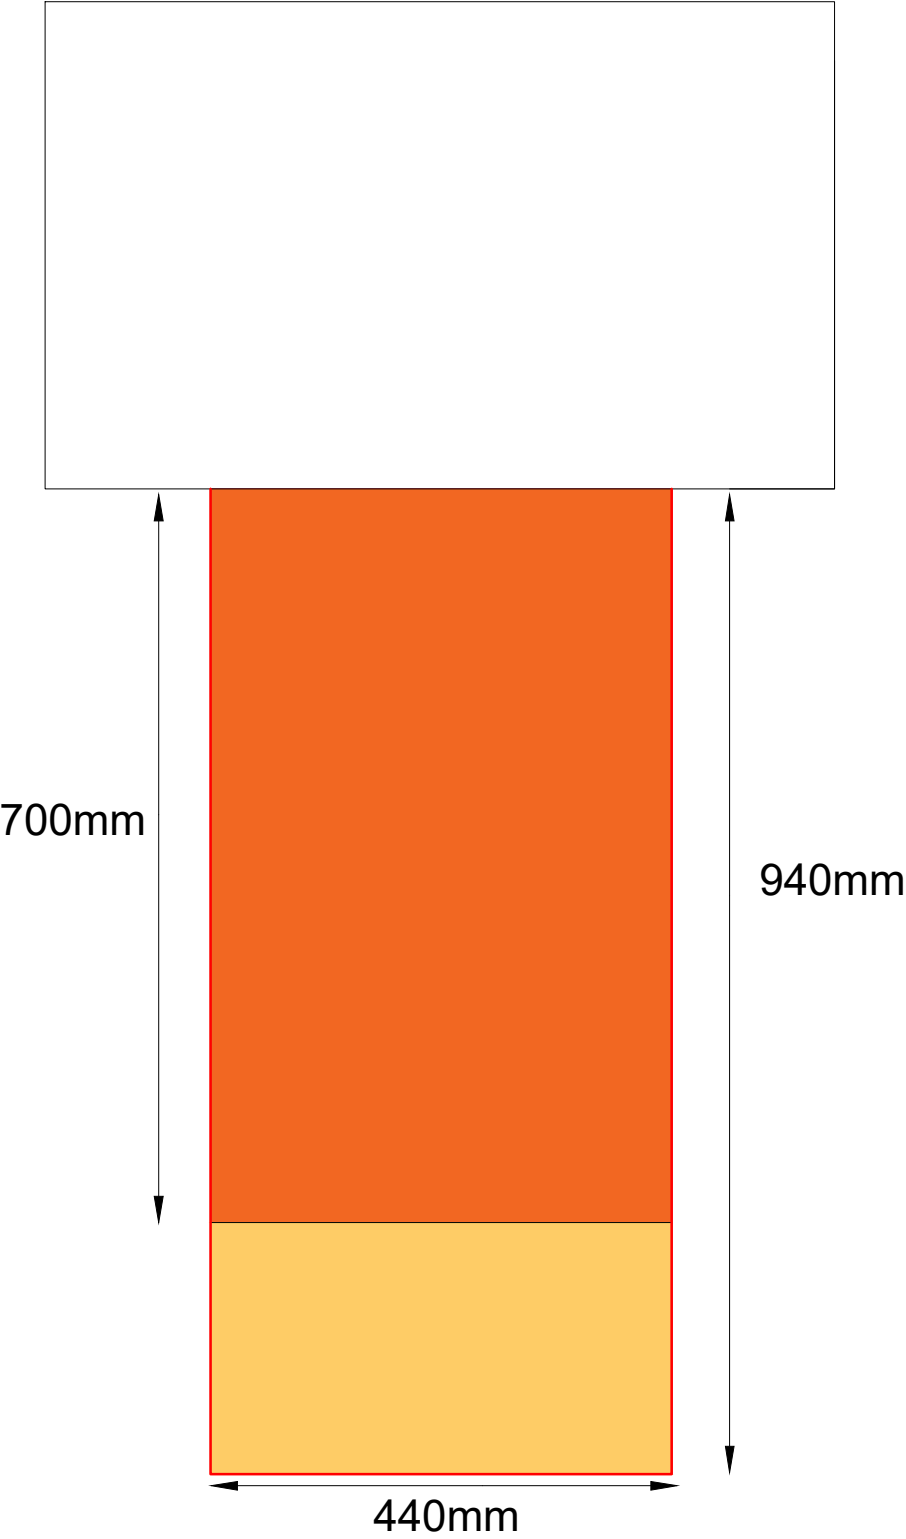West



Foundation Pit Details

- Concrete Pillar
- Foundation Slab
- Concrete
- Sandstone
- Made Ground - Brown Gravelly Sand.
Site won natural backfill
- Rubber Membrane
- Trial Pit

Notes:

P1	REVA	12.03.2021	LM	JC
Phase	Issue	Date	Drawn	Checked

Client:

Property Alliance
Group Ltd

Job Title:

Renaissance
Deansgate

Job No:

14-261

Drawing No:

023

Date:

12.03.2021

Scale:


NTS




Environmental Engineering
Partnerships Ltd
City Heliport & Business Centre
Eccles, Manchester, M30 7RU
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

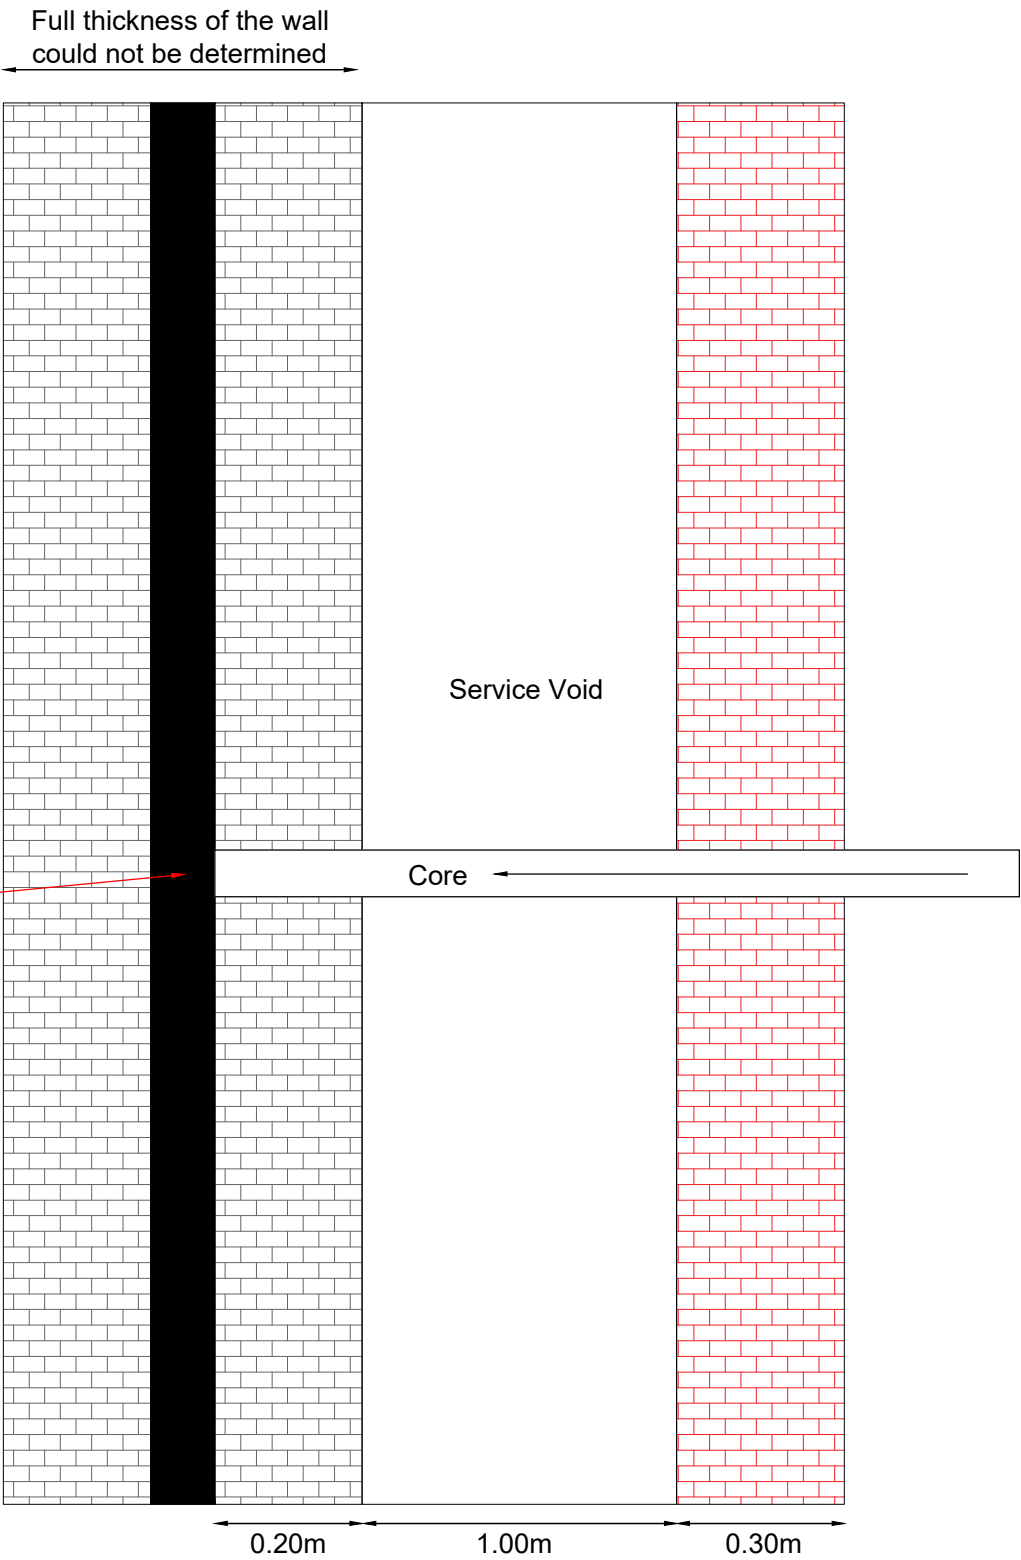WC101



WC102

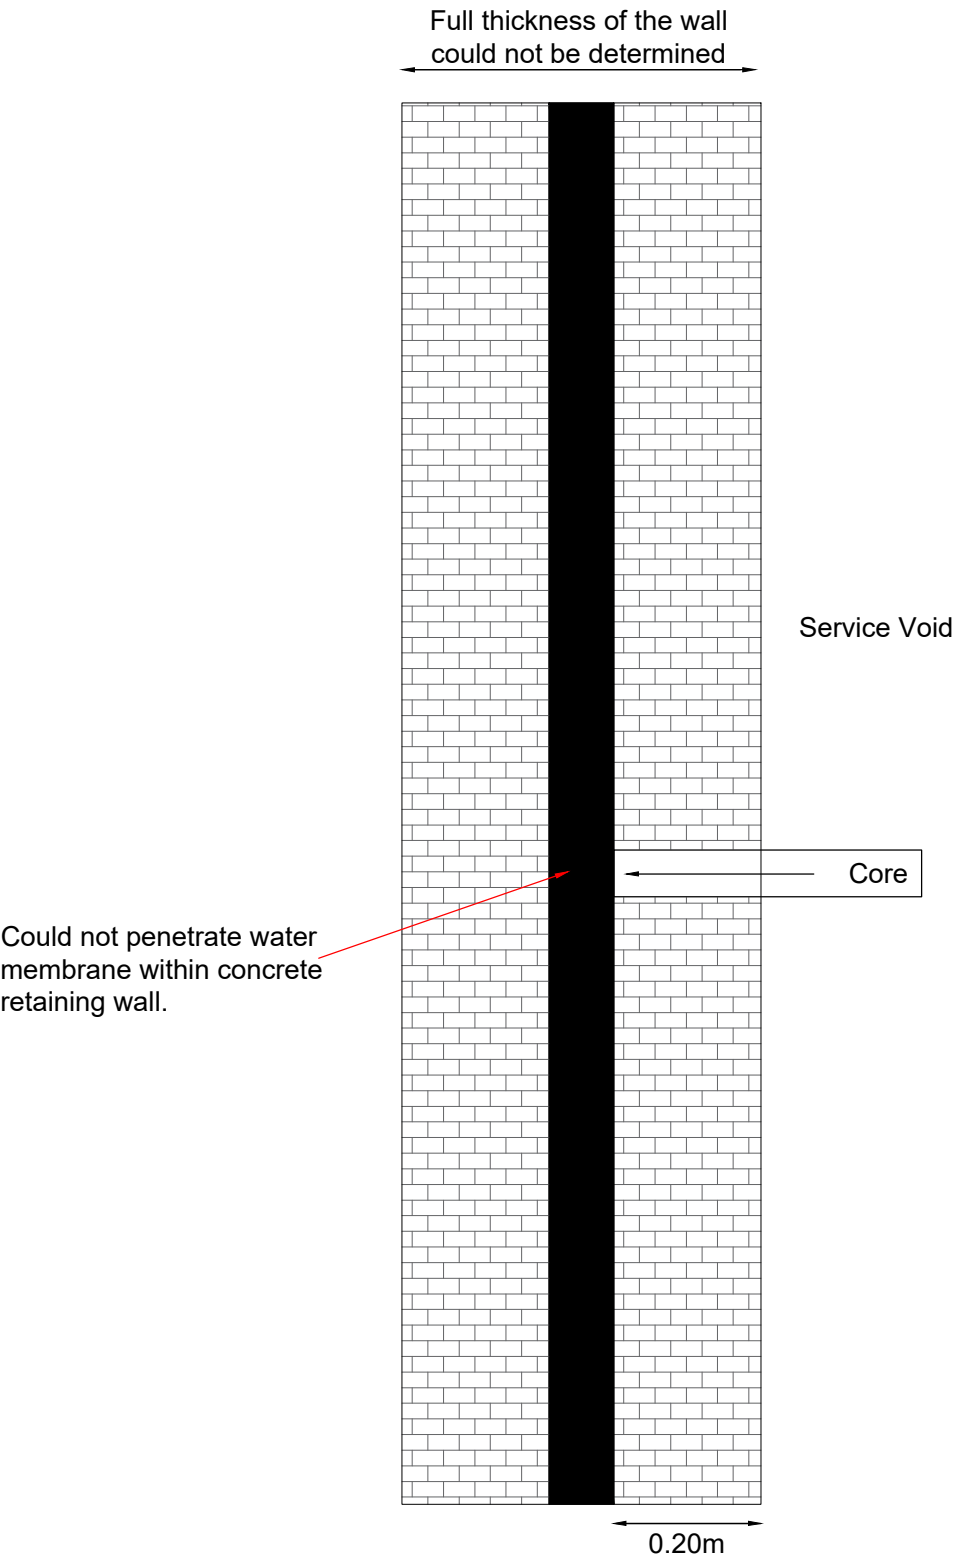

Key

- Rubber Membrane
- Concrete Retaining Wall
- Brick Outer Wall

Notes:

P1	REVB	21.04.2021	LM	NS
P1	REVA	07.04.2021	EB	NS
Phase	Issue	Date	Drawn	Checked

Client:

Property Alliance
Group Ltd

Job Title:

Renaissance
Deansgate

Job No:

14-261

Drawing No:

025

Date:

21.04.2021

Scale:

NTS



Environmental Engineering
Partnerships Ltd
City Heliport & Business Centre
Eccles, Manchester, M30 7RU
Tel: 0161 707 9612
E-mail: info@e3p.co.uk
Website: www.e3p.co.uk

The client must not amend any drawing, design or other intellectual property produced by E3P Ltd without permission in writing from E3P Ltd in advance of any amendments being made. In the event that such written permission is not obtained in advance of the amendments being made, E3P Ltd shall not be liable for any damage and/or losses occurring as a result of the amended drawing, design or intellectual property.

APPENDIX IV PHOTOGRAPHS

PLATE 1 TP103 EXCAVATION



PLATE 2 TP104 EXCAVATION



PLATE 3 RBH101 ROCK CORE (1.00 – 6.00 M BGL)



PLATE 4 RBH103 ROCK CORE (8.00 – 10.00 m bgl)



Renaissance Hotel

Phase II Geoenvironmental Site Assessment

April 2021

PLATE 5 RBH104 ROCK CORE (3.00 – 7.00 m bgl)




PLATE 6 RBH106 ROCK CORE (4.40 – 8.00 m bgl)



APPENDIX V

E3P EXPLORATORY HOLE LOGS

Project Name: Renaissance Hotel	Project No. 14261	Co-ords: 383715.00 - 398580.00 Level:	Date 26/02/2021
Location: Deansgate, Manchester		Dimensions (m): 0.55 0.96	Scale 1:30
Client: Property Alliance Group Ltd		Depth 0.80	Logged J Craig

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.40	ES		0.35 0.36			MADE GROUND: Concrete.	
	0.65	BULK		0.70 0.80			MADE GROUND: Rubber membrane. MADE GROUND: Brown gravelly medium sand. Gravel is fine to coarse angular to subangular of concrete and brick. (Site won natural material used for foundation backfill)	
							Reddish brown medium SAND. (Weathered bedrock) End of Pit at 0.80m	

Remarks: 1. Foundation pad observed at 0.70m bgl 2. Foundation pad 0.70m in length from supporting pillar 3. Depth of pad could not be determined

Stability: Stable

Project Name: Renaissance Hotel	Project No. 14261	Co-ords: 383724.00 - 398586.00 Level:	Date 26/02/2021
Location: Deansgate, Manchester		Dimensions (m): 0.57 0.79	Scale 1:30
Client: Property Alliance Group Ltd		Depth 0.70	Logged J Craig

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description
	Depth	Type	Results				
	0.40	ES		0.35			MADE GROUND: Concrete.
				0.36			MADE GROUND: Rubber membrane.
				0.70			MADE GROUND: Brown gravelly medium sand. Gravel is fine to coarse angular to subangular of concrete and brick. (Site won natural material used for foundation backfill)
							End of Pit at 0.70m

Trial Pit Photographs



TP102 spoil

Remarks: 1. Foundation for wall observed at 0.40m bgl, placed upon possible beam structure observed at 0.70m bgl. 2. Depth of foundation could not be determined

Stability: Stable

Project Name: Renaissance Hotel	Project No. 14261	Co-ords: 383718.00 - 398591.00 Level:	Date 26/02/2021
Location: Deansgate, Manchester	Dimensions (m): 0.49 0.78		Scale 1:30
Client: Property Alliance Group Ltd	Depth 0.80		Logged J Craig

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.45 0.50	ES BULK		0.35 0.36 0.70 0.80			MADE GROUND: Concrete.	1 </

Trial Pit Photographs



TP103

Remarks: 1. Foundation pad observed at 0.70m bgl 2. Foundation pad 0.70m in length from supporting pillar 3. Depth of pad could not be determined

Stability: Stable

Project Name: Renaissance Hotel	Project No. 14261	Co-ords: 383713.00 - 398591.00 Level:	Date 26/02/2021
Location: Deansgate, Manchester		Dimensions (m): 0.44 x 0.94 Depth 0.80	Scale 1:30 Logged J Craig
Client: Property Alliance Group Ltd			

Water Strike	Samples & In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
	Depth	Type	Results					
	0.45	ES		0.35 0.36 0.70 0.80			MADE GROUND: Concrete.	1 <


Trial Pit Photographs



TP104

Remarks: 1. Foundation pad observed at 0.70m bgl 2. Foundation pad 0.70m in length from supporting pillar 3. Depth of pad could not be determined

Stability: Stable

				Borehole Log			Borehole No. RBH101 Sheet 1 of 1		
Project Name: Renaissance Hotel				Project No. 14261		Co-ords: 383744E - 398650N		Hole Type BH	
Location: Deansgate, Manchester				Level:		Scale 1:50		Logged By J Craig	
Client: Property Alliance Group Ltd				Dates: 19/02/2021					
Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					0.25 0.27 0.35		 MADE GROUND: Concrete.  MADE GROUND: Rubber membrane.  MADE GROUND: Concrete. Reddish brown medium SAND. (Weathered bedrock)	1	
		0.80	BULK						
		1.00	SPT	50 (14,11/50 for 245mm)					
						1.50			
		2.00	SPT	46 (21,4/46 for 84mm)				Very weak medium bedded reddish brown fine SANDSTONE with occasional lenses of extremely weak sandstone (3.00-3.18m bgl) (3.78-3.86m bgl). Bedding 0-10 degrees, widely to medium spaced, planar rough.	2
		2.30	U						
		3.00	SPT	50 (25 for 50mm/50 for 70mm)					3
		4.00	SPT	50 (25 for 45mm/50 for 55mm)					4
		5.00	SPT	50 (25 for 40mm/50 for 50mm)		5.10			5
		5.50	U						
		6.00	SPT	50 (25 for 25mm/50 for 70mm)				Medium strong (becoming very strong at 6.28m bgl) medium bedded reddish brown coarse SANDSTONE with occasional interbeds of weak sandstone (6.50-6.53m bgl) (7.24-7.35m bgl) (7.82-7.89m bgl). Bedding 0-10 degrees, medium spaced planar rough (becoming closely spaced undulating rough at 8.43m bgl).	6
		6.28	U						
		6.71	U						7
		7.47	U						
		8.82	U						9
	9.47	U							
	9.81	U							
					10.00		End of Borehole at 10.00m	10	
Remarks 1. Install of 2m plain, 8m slotted 2. Borehole terminated at 10.00m bgl in sandstone at target depth									



Borehole Log

Borehole No.
RBH102

Sheet 1 of 1

Project Name: Renaissance Hotel

Project No. 14261

Co-ords: 383741E - 398643N

Hole Type
BH

Location: Deansgate, Manchester

Level:

Scale
1:50

Client: Property Alliance Group Ltd

Dates: 20/02/2021

Logged By
J Craig

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					0.35		MADE GROUND: Concrete.	1	
					0.46		MADE GROUND: Grey slightly sandy gravel. Gravel is fine to coarse angular to subangular of limestone. (MOT)		
							MADE GROUND: Brick wall. (unknown underlying structure)		
					1.50		Strong medium bedded reddish brown medium SANDSTONE. Bedding 0-10 degrees medium spaced planar rough.	2	
	1.86	U	50 (25 for 45mm/50 for 50mm)	2.00		NO RECOVERY (Assumed SANDSTONE).			
	2.00	SPT						3	
	3.00	SPT	50 (25 for 60mm/50 for 40mm)						
	4.00	SPT	50 (25 for 30mm/50 for 30mm)						
								4	
	5.00	SPT	50 (25 for 55mm/50 for 45mm)						
6.00	SPT	50 (25 for 30mm/50 for 70mm)							
							5		
7.00	SPT	50 (25 for 15mm/50 for 25mm)	7.00						
7.23	U								
							6		
8.00	SPT	50 (25 for 20mm/50 for 20mm)							
8.39	U								
							7		
8.64	U								
8.82	U								
							8		
9.30	U								
9.45	U								
							9		
9.65	U								
					10.00		End of Borehole at 10.00m	10	

Remarks

1. Install of 0.5m plain, 1.1m slotted 2. Borehole terminated at 10.00m bgl in sandstone at target depth





Borehole Log

Borehole No.

RBH103

Sheet 1 of 1

Project Name: Renaissance Hotel

Project No.
14261

Co-ords: 383734E - 398636N

Hole Type
BH

Location: Deansgate, Manchester











Level:

Scale
1:50

Client: Property Alliance Group Ltd

Dates: 20/02/2021

Logged By
J Craig

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
					0.25			MADE GROUND: Concrete.	
					0.27			MADE GROUND: Rubber membrane.	
					0.33			MADE GROUND: Concrete.	
		0.70	U		0.70			MADE GROUND: Grey slightly sandy gravel. Gravel is fine to coarse angular to subangular of limestone. (MOT)	
		1.00	SPT	50 (6,7/50 for 105mm)				Strong medium bedded reddish brown coarse SANDSTONE. Bedding 0-10 degrees medium spaced planar rough, becoming undulating rough. Jointing 40-45 degrees undulating rough.	1
		1.50	U						
		2.00	SPT	50 (25 for 85mm/50 for 60mm)					2
		2.70	U						
		3.00	SPT	50 (25 for 60mm/50 for 55mm)					3
		3.40	U						
		4.00	SPT	50 (25 for 50mm/50 for 45mm)					4
									
		5.43	U						5
									
	6.63	U						6	
	7.52	U						7	
	8.60	U						8	
					10.00			9	
							End of Borehole at 10.00m	10	

Borehole Log

Borehole No.

RBH104

Sheet 1 of 1

Project Name: Renaissance Hotel

Project No.
14261

Co-ords: 383729E - 398624N

Hole Type
BH

Location: Deansgate, Manchester







Level:

Scale
1:50

Client: Property Alliance Group Ltd

Dates: 22/02/2021

Logged By
J Craig

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description		
		Depth (m)	Type	Results						
		0.30	ES	50 (25 for 60mm/50 for 45mm)	0.25 0.27 0.35 0.80			MADE GROUND: Concrete.		
							MADE GROUND: Rubber membrane.			
							MADE GROUND: Concrete.			
							MADE GROUND: Brick wall. (unknown underlying structure)			
		0.90 1.00	ES SPT	50 (25 for 45mm/50 for 40mm)					Very weak medium bedded reddish brown fine SANDSTONE. Bedding 0-10 degrees, widely to medium spaced, planar rough.	1
		1.45	U							
		2.00	SPT							
		2.43	U							
		3.00	SPT	50 (25 for 30mm/50 for 20mm)	3.00				Strong medium bedded reddish brown coarse SANDSTONE. Bedding 0-10 degrees medium spaced planar rough, becoming undulating rough. Jointing 40-45 degrees undulating rough.	3
		3.36	U							
		4.00	SPT	50 (25 for 25mm/50 for 30mm)						4
		4.20	U							
		5.00	SPT	50 (25 for 2mm/50 for 10mm)						5
		5.60	U							
		6.00	SPT	50 (25 for 70mm/50 for 75mm)						6
		6.43	U							
		7.00	SPT	50 (25 for 60mm/50 for 55mm)						7
		7.26	U							
										9
		9.60	U							
					10.00					10
								End of Borehole at 10.00m		10

Remarks

1. Install of 2m plain, 8m slotted 2. Borehole terminated at 10.00m bgl in sandstone at target depth



Borehole Log

Borehole No.

RBH105

Sheet 1 of 1

Project Name: Renaissance Hotel

Project No.
14261

Co-ords: 383704E - 398599N

Hole Type
BH

Location: Deansgate, Manchester

Level:

Scale
1:50

Client: Property Alliance Group Ltd

Dates: 26/02/2021

Logged By
J Craig

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.30	ES		0.35			MADE GROUND: Concrete.	
		0.50	ES		0.45			MADE GROUND: Grey slightly sandy gravel. Gravel is fine to coarse angular to subangular of limestone. (MOT)	
		0.78	U					Very weak medium bedded reddish brown fine SANDSTONE. Bedding 0-10 degrees, widely to medium spaced, planar rough.	1
		1.10	U						2
		3.00	SPT	50 (25 for 70mm/50 for 45mm)					3
		3.40	U						
		4.00	SPT	50 (25 for 45mm/50 for 55mm)					4
					4.48				
		5.00	U					Strong medium bedded reddish brown coarse SANDSTONE. Bedding 0-10 degrees medium spaced planar rough, becoming undulating rough.	5
		6.00	SPT	50 (25 for 60mm/50 for 40mm)					6
		6.13	U						
		6.80	U						
		7.00	SPT	50 (25 for 30mm/50 for 35mm)					7
		8.00	SPT	50 (25 for 50mm/50 for 40mm)					8
		8.37	U						9
		9.73	U						
					10.00			End of Borehole at 10.00m	10

Remarks

1. Install of 2m plain, 8m slotted 2. Borehole terminated at 10.00m bgl in sandstone at target depth





Borehole Log

Borehole No.
RBH106

Sheet 1 of 1

Project Name: Renaissance Hotel

Project No. 14261

Co-ords: 383722E - 398602N

Hole Type
BH

Location: Deansgate, Manchester






Level:

Scale
1:50

Client: Property Alliance Group Ltd

Dates: 24/02/2021

Logged By
J Craig

Well	Water Strikes	Sample and In Situ Testing			Depth (m)	Level (m)	Legend	Stratum Description	
		Depth (m)	Type	Results					
		0.35	ES		0.26 0.28 0.40		MADE GROUND: Concrete.	1	
							MADE GROUND: Rubber membrane.		
							MADE GROUND: Concrete.		
							MADE GROUND: Concrete wall and sandstone.		
		1.54	U		1.50		Strong medium bedded reddish brown coarse SANDSTONE. Bedding 0-10 degrees medium spaced planar rough, becoming undulating rough.	2	
		1.80	SPT	50 (25 for 70mm/50 for 45mm)					
		2.80	SPT	50 (21,4/50 for 70mm)					
		3.10	U						
		3.37	U						
		3.80	SPT	50 (25 for 45mm/50 for 75mm)					
		4.50	SPT	50 (25 for 60mm/50 for 55mm)					
		4.70	U						
		5.40	U						
		5.40	SPT	50 (25 for 50mm/50 for 45mm)					
		6.20	SPT	50 (25 for 6mm/50 for 70mm)					
		7.20	U						
	7.20	SPT	50 (25 for 60mm/50 for 45mm)						
	8.20	U		8.20					
	8.20	SPT	50 (25 for 50mm/50 for 35mm)						
	9.00	SPT	50 (25 for 60mm/50 for 40mm)	9.20					NO RECOVERY (Assumed SANDSTONE).
	9.80	U					Strong medium bedded reddish brown coarse SANDSTONE. Bedding 0-10 degrees medium spaced planar rough, becoming undulating rough.		
				10.00				End of Borehole at 10.00m	10

Remarks

1. Install of 2m plain, 8m slotted 2. Borehole terminated at 10.00m bgl in sandstone at target depth



APPENDIX VI

CHEMICAL TESTING

RESULTS



Stuart Ellis
e3p
Taylor Road
Urmston
Manchester
M41 7JQ

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: sellis@e3p.co.uk

Analytical Report Number : 21-59458

Project / Site name:	Renaissance Hotel	Samples received on:	26/02/2021
Your job number:	14-261	Samples instructed on/ Analysis started on:	26/02/2021
Your order number:	14-261-SE-K	Analysis completed by:	08/03/2021
Report Issue Number:	1	Report issued on:	08/03/2021
Samples Analysed:	4 soil samples		

Signed: 

Zina Abdul Razzak
Senior Quality Specialist
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :

soils - 4 weeks from reporting
leachates - 2 weeks from reporting
waters - 2 weeks from reporting
asbestos - 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Any assessments of compliance with specifications are based on actual analytical results with no contribution from uncertainty of measurement.
Application of uncertainty of measurement would provide a range within which the true result lies.
An estimate of measurement uncertainty can be provided on request.

Analytical Report Number: 21-59458
Project / Site name: Renaissance Hotel
Your Order No: 14-261-SE-K

Lab Sample Number				1786020	1786021	1786022	1786023
Sample Reference				RH101	RH102	RH103	RH103
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.80	0.60	0.80	0.40
Date Sampled				23/02/2021	23/02/2021	23/02/2021	23/02/2021
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status				
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	0.01	NONE	19	13	18	14
Total mass of sample received	kg	0.001	NONE	0.5	0.5	0.5	0.5

Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Not-detected
------------------	------	-----	-----------	--------------	--------------	--------------	--------------

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	9.2	12.4	9.2	12.3
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1
Total Sulphate as SO ₄	mg/kg	50	MCERTS	94	5500	270	5100
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	g/l	0.00125	MCERTS	0.014	0.015	0.083	0.011
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	mg/kg	2.5	MCERTS	28	31	170	21
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	mg/l	1.25	MCERTS	13.8	15.4	83.3	10.5
Sulphide	mg/kg	1	MCERTS	< 1.0	4.6	< 1.0	5.8
Total Sulphur	mg/kg	50	MCERTS	< 50	2000	390	1900

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.4	< 0.05
Anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.44	< 0.05
Pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.42	< 0.05
Benzo(a)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.33	< 0.05
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	0.23	< 0.05
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	< 0.80	< 0.80	1.82	< 0.80
-----------------------------	-------	-----	--------	--------	--------	------	--------

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	1.7	3.2	2.2	3.9
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	0.3	< 0.2	0.3
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	4.2	14	5.7	14
Copper (aqua regia extractable)	mg/kg	1	MCERTS	15	29	14	30
Lead (aqua regia extractable)	mg/kg	1	MCERTS	3.6	9.8	14	11
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	5.9	9.5	7.4	11
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	21	64	38	65

Petroleum Hydrocarbons

Analytical Report Number: 21-59458
 Project / Site name: Renaissance Hotel
 Your Order No: 14-261-SE-K

Lab Sample Number				1786020	1786021	1786022	1786023
Sample Reference				RH101	RH102	RH103	RH103
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.80	0.60	0.80	0.40
Date Sampled				23/02/2021	23/02/2021	23/02/2021	23/02/2021
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status				
TPH (C5 - C6)	mg/kg	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0
TPH (C6 - C8)	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1
TPH (C8 - C10)	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1
TPH (C10 - C12)	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0
TPH (C12 - C16)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0
TPH (C16 - C21)	mg/kg	1	MCERTS	< 1.0	7.1	< 1.0	< 1.0
TPH (C21 - C35)	mg/kg	1	MCERTS	< 1.0	51	< 1.0	< 1.0
TPH (C35 - C40)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10
TPH Total C5 - C40	mg/kg	10	MCERTS	< 10	60	< 10	< 10

U/S = Unsuitable Sample I/S = Insufficient Sample

Analytical Report Number : 21-59458
Project / Site name: Renaissance Hotel

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
1786020	RH101	None Supplied	0.8	Brown sand.
1786021	RH102	None Supplied	0.6	Light grey sandy clay with gravel.
1786022	RH103	None Supplied	0.8	Brown sand with gravel.
1786023	RH103	None Supplied	0.4	Light grey sandy clay with gravel.

Analytical Report Number : 21-59458
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In house method.	L038-PL	D	MCERTS
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Hexavalent chromium in soil	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Moisture Content	Moisture content, determined gravimetrically. (30 oC)	In house method.	L019-UK/PL	W	NONE
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In house method.	L099-PL	D	MCERTS
Sulphide in soil	Determination of sulphide in soil by acidification and heating to liberate hydrogen sulphide, trapped in an alkaline solution then assayed by ion selective electrode.	In-house method	L010-PL	D	MCERTS
Total sulphate (as SO ₄ in soil)	Determination of total sulphate in soil by extraction with 10% HCl followed by ICP-OES.	In house method.	L038-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Total Sulphur in soil	Determination of total sulphur in soil by extraction with aqua-regia, potassium bromide/bromate followed by ICP-OES.	In house method.	L038-PL	D	MCERTS
Total cyanide in soil	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	MCERTS
TPH in (Soil)	Determination of TPH bands by HS-GC-MS/GC-FID	In-house method, TPH with carbon banding and silica gel split/cleanup.	L076-PL	D	MCERTS
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Sulphate, water soluble, in soil (1hr extraction)	Sulphate, water soluble, in soil (1hr extraction)	In-house method	L038-PL	D	MCERTS



Analytical Report Number : 21-59458
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
----------------------	-------------------------------	-----------------------------	---------------	--------------------	----------------------

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Unless otherwise indicated, site information, order number, project number, sampling date, time, sample reference and depth are provided by the client. The instructed on date indicates the date on which this information was provided to the laboratory.

**Stuart Ellis**

e3p
Taylor Road
Urmston
Manchester
M41 7JQ

e: sellis@e3p.co.uk

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404

f: 01923 237404

e: reception@i2analytical.com

Analytical Report Number : 21-59809

Project / Site name:	Renaissance Hotel	Samples received on:	01/03/2021
Your job number:	14-261	Samples instructed on/ Analysis started on:	02/03/2021
Your order number:	14261-SE-K	Analysis completed by:	09/03/2021
Report Issue Number:	1	Report issued on:	09/03/2021
Samples Analysed:	1 leachate sample - 4 soil samples		

Signed: *A. Czerwińska*

Agnieszka Czerwińska
Technical Reviewer (Reporting Team)
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :

soils - 4 weeks from reporting
leachates - 2 weeks from reporting
waters - 2 weeks from reporting
asbestos - 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Any assessments of compliance with specifications are based on actual analytical results with no contribution from uncertainty of measurement.
Application of uncertainty of measurement would provide a range within which the true result lies.
An estimate of measurement uncertainty can be provided on request.

Analytical Report Number: 21-59809
Project / Site name: Renaissance Hotel
Your Order No: 14261-SE-K

Lab Sample Number				1787943	1787944	1787945	1787946
Sample Reference				TP01	TP02	TP03	TP04
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.40	0.40	0.45	0.45
Date Sampled				26/02/2021	26/02/2021	26/02/2021	26/02/2021
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status				
Stone Content	%	0.1	NONE	< 0.1	< 0.1	< 0.1	< 0.1
Moisture Content	%	0.01	NONE	4.6	14	5.9	4.8
Total mass of sample received	kg	0.001	NONE	1	0.5	0.5	0.5

Asbestos in Soil Screen / Identification Name	Type	N/A	ISO 17025	-	-	-	Chrysotile
Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Detected
Asbestos Quantification (Stage 2)	%	0.001	ISO 17025	-	-	-	< 0.001
Asbestos Quantification Total	%	0.001	ISO 17025	-	-	-	< 0.001

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	11.5	12.3	11.2	11.3
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1
Total Sulphate as SO ₄	mg/kg	50	MCERTS	1200	1800	640	390
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	g/l	0.00125	MCERTS	0.031	0.0047	0.077	0.027
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	mg/kg	2.5	MCERTS	62	9.3	150	53
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	mg/l	1.25	MCERTS	31.2	4.7	76.7	26.6
Sulphide	mg/kg	1	MCERTS	2.7	5.6	13	8
Total Sulphur	mg/kg	50	MCERTS	460	630	620	250

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	< 0.80	< 0.80	< 0.80	< 0.80
-----------------------------	-------	-----	--------	--------	--------	--------	--------

Analytical Report Number: 21-59809
Project / Site name: Renaissance Hotel
Your Order No: 14261-SE-K

Lab Sample Number				1787943	1787944	1787945	1787946
Sample Reference				TP01	TP02	TP03	TP04
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.40	0.40	0.45	0.45
Date Sampled				26/02/2021	26/02/2021	26/02/2021	26/02/2021
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status				

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	3.5	1.6	1.9	1.9
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	0.4	< 0.2	0.4	0.3
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	8.5	8.2	6.1	5.6
Copper (aqua regia extractable)	mg/kg	1	MCERTS	27	18	13	12
Lead (aqua regia extractable)	mg/kg	1	MCERTS	16	4.1	7.1	6.4
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	9.2	6.6	6	5.5
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	54	24	23	21

Petroleum Hydrocarbons

TPH (C5 - C6)	mg/kg	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0
TPH (C6 - C8)	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1
TPH (C8 - C10)	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1
TPH (C10 - C12)	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0
TPH (C12 - C16)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0
TPH (C16 - C21)	mg/kg	1	MCERTS	< 1.0	< 1.0	16	< 1.0
TPH (C21 - C35)	mg/kg	1	MCERTS	< 1.0	< 1.0	42	< 1.0
TPH (C35 - C40)	mg/kg	10	MCERTS	< 10	< 10	14	< 10
TPH Total C5 - C40	mg/kg	10	MCERTS	< 10	< 10	74	< 10

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number: 21-59809
Project / Site name: Renaissance Hotel
Your Order No: 14261-SE-K

Certificate of Analysis - Asbestos Quantification

Methods:

Qualitative Analysis

The samples were analysed qualitatively for asbestos by polarising light and dispersion staining as described by the Health and Safety Executive in HSG 248.

Quantitative Analysis

The analysis was carried out using our documented in-house method A006-PL based on HSE Contract Research Report No: 83/1996: Development and Validation of an analytical method to determine the amount of asbestos in soils and loose aggregates (Davies et al, 1996) and HSG 248. Our method includes initial examination of the entire representative sample, then fractionation and detailed analysis of each fraction, with quantification by hand picking and weighing.

The limit of detection (reporting limit) of this method is 0.001 %.

The method has been validated using samples of at least 100 g, results for samples smaller than this should be interpreted with caution.

Both Qualitative and Quantitative Analyses are UKAS accredited.

Sample Number	Sample ID	Sample Depth (m)	Sample Weight (g)	Asbestos Containing Material Types Detected (ACM)	PLM Results	Asbestos by hand picking/weighing (%)	Total % Asbestos in Sample
1787946	TP04	0.45	136	Loose Fibres	Chrysotile	< 0.001	< 0.001

Opinions and interpretations expressed herein are outside the scope of UKAS accreditation.



Analytical Report Number: 21-59809
Project / Site name: Renaissance Hotel

Your Order No: 14261-SE-K

Lab Sample Number				1787947
Sample Reference				TP01
Sample Number				None Supplied
Depth (m)				0.40
Date Sampled				26/02/2021
Time Taken				None Supplied
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status	

General Inorganics

pH	pH Units	N/A	ISO 17025	12
Total Cyanide (Low Level 1 µg/l)	µg/l	1	ISO 17025	< 1.0

Total Phenols

Total Phenols (monohydric)	µg/l	1	ISO 17025	6.7
----------------------------	------	---	-----------	-----

Speciated PAHs

Naphthalene	µg/l	0.01	ISO 17025	< 0.01
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01
Fluorene	µg/l	0.01	ISO 17025	< 0.01
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	NONE	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	NONE	< 0.01
Benzo(ghi)perylene	µg/l	0.01	NONE	< 0.01

Total PAH

Total EPA-16 PAHs	µg/l	0.2	NONE	< 0.2
-------------------	------	-----	------	-------

Heavy Metals / Metalloids

Arsenic (dissolved)	µg/l	1	ISO 17025	< 1.0
Cadmium (dissolved)	µg/l	0.08	ISO 17025	< 0.08
Chromium (hexavalent)	µg/l	5	ISO 17025	11
Chromium (dissolved)	µg/l	0.4	ISO 17025	12
Copper (dissolved)	µg/l	0.7	ISO 17025	14
Lead (dissolved)	µg/l	1	ISO 17025	1.2
Mercury (dissolved)	µg/l	0.5	ISO 17025	< 0.5
Nickel (dissolved)	µg/l	0.3	ISO 17025	2.5
Selenium (dissolved)	µg/l	4	ISO 17025	< 4.0
Zinc (dissolved)	µg/l	0.4	ISO 17025	9.5

Monoaromatics & Oxygenates

Benzene	µg/l	1	ISO 17025	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	10	NONE	< 10



Analytical Report Number: 21-59809
Project / Site name: Renaissance Hotel

Your Order No: 14261-SE-K

Lab Sample Number				1787947
Sample Reference				TP01
Sample Number				None Supplied
Depth (m)				0.40
Date Sampled				26/02/2021
Time Taken				None Supplied
Analytical Parameter (Leachate Analysis)	Units	Limit of detection	Accreditation Status	

Petroleum Hydrocarbons

TPH1 (C10 - C40)	µg/l	10	NONE	< 10
------------------	------	----	------	------

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	ISO 17025	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	ISO 17025	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	ISO 17025	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	ISO 17025	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	ISO 17025	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	ISO 17025	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number : 21-59809
Project / Site name: Renaissance Hotel

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
1787943	TP01	None Supplied	0.4	Brown loam and sand with gravel and vegetation.
1787944	TP02	None Supplied	0.4	Brown clay and sand with gravel and vegetation.
1787945	TP03	None Supplied	0.45	Brown clay and sand with gravel.
1787946	TP04	None Supplied	0.45	Brown clay and sand with gravel.

Analytical Report Number : 21-59809
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In house method.	L038-PL	D	MCERTS
BS EN 12457-1 (2:1) Leachate Prep	2:1 (as recieved, moisture adjusted) end over end extraction with water for 24 hours. Eluate filtered prior to analysis.	In-house method based on BSEN12457-1.	L043-PL	W	NONE
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Metals by ICP-OES in leachate	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Hexavalent chromium in leachate	Determination of hexavalent chromium in leachate by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	ISO 17025
Hexavalent chromium in soil	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Moisture Content	Moisture content, determined gravimetrically. (30 oC)	In house method.	L019-UK/PL	W	NONE
Monohydric phenols in leachate - LOW LEVEL 1 ug/l	Determination of phenols in leachate by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
Speciated EPA-16 PAHs in leachate	Determination of PAH compounds in leachate by extraction in dichloromethane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L102B-PL	W	NONE
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In house method.	L099-PL	D	MCERTS
pH at 20oC in leachate	Determination of pH in leachate by electrometric measurement.	In house method.	L005-PL	W	ISO 17025
Sulphide in soil	Determination of sulphide in soil by acidification and heating to liberate hydrogen sulphide, trapped in an alkaline solution then assayed by ion selective electrode.	In-house method	L010-PL	D	MCERTS
Total sulphate (as SO4 in soil)	Determination of total sulphate in soil by extraction with 10% HCl followed by ICP-OES.	In house method.	L038-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE

Analytical Report Number : 21-59809
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Total Sulphur in soil	Determination of total sulphur in soil by extraction with aqua-regia, potassium bromide/bromate followed by ICP-OES.	In house method.	L038-PL	D	MCERTS
TPH1 (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Leachates)	Determination of dichloromethane extractable hydrocarbons in leachate by GC-MS.	In-house method	L070-PL	W	NONE
Total cyanide in soil	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	MCERTS
BTEX and MTBE in leachates (Monoaromatics)	Determination of BTEX and MTBE in leachates by headspace GC-MS.	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
TPH in (Soil)	Determination of TPH bands by HS-GC-MS/GC-FID	In-house method, TPH with carbon banding and silica gel split/cleanup.	L076-PL	D	MCERTS
Total cyanide in leachate - 1µg/l	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L080-PL	W	ISO 17025
Asbestos Quantification - Gravimetric	Asbestos quantification by gravimetric method - in house method based on references.	HSE Report No: 83/1996, HSG 248, HSG 264 & SCA Blue Book (draft).	A006-PL	D	ISO 17025
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Sulphate, water soluble, in soil (1hr extraction)	Sulphate, water soluble, in soil (1hr extraction)	In-house method	L038-PL	D	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Unless otherwise indicated, site information, order number, project number, sampling date, time, sample reference and depth are provided by the client. The instructed on date indicates the date on which this information was provided to the laboratory.

**Stuart Ellis**

e3p
Taylor Road
Urmston
Manchester
M41 7JQ

e: sellis@e3p.co.uk

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404

f: 01923 237404

e: reception@i2analytical.com

Analytical Report Number : 21-60252

Project / Site name:	Renaissance Hotel	Samples received on:	03/03/2021
Your job number:	14-261	Samples instructed on/ Analysis started on:	03/03/2021
Your order number:	14261-JC-H	Analysis completed by:	10/03/2021
Report Issue Number:	1	Report issued on:	10/03/2021
Samples Analysed:	5 soil samples		

Signed: *A. Czerwińska*

Agnieszka Czerwińska
Technical Reviewer (Reporting Team)
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :

soils - 4 weeks from reporting
leachates - 2 weeks from reporting
waters - 2 weeks from reporting
asbestos - 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Any assessments of compliance with specifications are based on actual analytical results with no contribution from uncertainty of measurement.
Application of uncertainty of measurement would provide a range within which the true result lies.
An estimate of measurement uncertainty can be provided on request.

Analytical Report Number: 21-60252
Project / Site name: Renaissance Hotel
Your Order No: 14261-JC-H

Lab Sample Number				1790718	1790719	1790720	1790721	1790722
Sample Reference				RBH104	RBH104	RBH105	RBH105	RBH106
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.30	0.90	0.30	0.50	0.35
Date Sampled				02/03/2021	02/03/2021	02/03/2021	02/03/2021	02/03/2021
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					
Stone Content	%	0.1	NONE	< 0.1	< 0.1	51	< 0.1	< 0.1
Moisture Content	%	0.01	NONE	11	11	2.2	12	3.4
Total mass of sample received	kg	0.001	NONE	0.4	0.4	0.4	0.4	0.4

Asbestos in Soil	Type	N/A	ISO 17025	Not-detected	Not-detected	Not-detected	Not-detected	Not-detected
------------------	------	-----	-----------	--------------	--------------	--------------	--------------	--------------

General Inorganics

pH - Automated	pH Units	N/A	MCERTS	7.8	9.1	11.5	9.5	11.7
Total Cyanide	mg/kg	1	MCERTS	< 1	< 1	< 1	< 1	< 1
Total Sulphate as SO ₄	mg/kg	50	MCERTS	1300	100	980	140	2800
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	g/l	0.00125	MCERTS	0.42	0.0095	0.02	0.014	0.017
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	mg/kg	2.5	MCERTS	830	19	40	29	34
Water Soluble SO ₄ (2:1 Leach. Equiv.) 1hr extraction	mg/l	1.25	MCERTS	416	9.5	19.8	14.3	16.9
Sulphide	mg/kg	1	MCERTS	2.8	1	8.5	< 1.0	4.2
Total Sulphur	mg/kg	50	MCERTS	370	< 50	450	< 50	1100

Total Phenols

Total Phenols (monohydric)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
----------------------------	-------	---	--------	-------	-------	-------	-------	-------

Speciated PAHs

Naphthalene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Acenaphthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluorene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Phenanthrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Chrysene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(b)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(k)fluoranthene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(a)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Indeno(1,2,3-cd)pyrene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Dibenz(a,h)anthracene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05
Benzo(ghi)perylene	mg/kg	0.05	MCERTS	< 0.05	< 0.05	< 0.05	< 0.05	< 0.05

Total PAH

Speciated Total EPA-16 PAHs	mg/kg	0.8	MCERTS	< 0.80	< 0.80	< 0.80	< 0.80	< 0.80
-----------------------------	-------	-----	--------	--------	--------	--------	--------	--------

Analytical Report Number: 21-60252
Project / Site name: Renaissance Hotel
Your Order No: 14261-JC-H

Lab Sample Number				1790718	1790719	1790720	1790721	1790722
Sample Reference				RBH104	RBH104	RBH105	RBH105	RBH106
Sample Number				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Depth (m)				0.30	0.90	0.30	0.50	0.35
Date Sampled				02/03/2021	02/03/2021	02/03/2021	02/03/2021	02/03/2021
Time Taken				None Supplied	None Supplied	None Supplied	None Supplied	None Supplied
Analytical Parameter (Soil Analysis)	Units	Limit of detection	Accreditation Status					

Heavy Metals / Metalloids

Arsenic (aqua regia extractable)	mg/kg	1	MCERTS	3.6	3.2	2.6	3.2	3.2
Cadmium (aqua regia extractable)	mg/kg	0.2	MCERTS	< 0.2	< 0.2	0.6	< 0.2	< 0.2
Chromium (hexavalent)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
Chromium (aqua regia extractable)	mg/kg	1	MCERTS	7.5	5.6	9.2	6.5	13
Copper (aqua regia extractable)	mg/kg	1	MCERTS	20	11	12	13	22
Lead (aqua regia extractable)	mg/kg	1	MCERTS	16	2.9	13	2.8	16
Mercury (aqua regia extractable)	mg/kg	0.3	MCERTS	< 0.3	< 0.3	< 0.3	< 0.3	< 0.3
Nickel (aqua regia extractable)	mg/kg	1	MCERTS	7.7	7.8	9.5	8.6	9
Selenium (aqua regia extractable)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
Zinc (aqua regia extractable)	mg/kg	1	MCERTS	31	18	45	18	54

Petroleum Hydrocarbons

TPH (C5 - C6)	mg/kg	1	NONE	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH (C6 - C8)	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH (C8 - C10)	mg/kg	0.1	MCERTS	< 0.1	< 0.1	< 0.1	< 0.1	< 0.1
TPH (C10 - C12)	mg/kg	2	MCERTS	< 2.0	< 2.0	< 2.0	< 2.0	< 2.0
TPH (C12 - C16)	mg/kg	4	MCERTS	< 4.0	< 4.0	< 4.0	< 4.0	< 4.0
TPH (C16 - C21)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH (C21 - C35)	mg/kg	1	MCERTS	< 1.0	< 1.0	< 1.0	< 1.0	< 1.0
TPH (C35 - C40)	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10
TPH Total C5 - C40	mg/kg	10	MCERTS	< 10	< 10	< 10	< 10	< 10

U/S = Unsuitable Sample I/S = Insufficient Sample

Analytical Report Number : 21-60252
Project / Site name: Renaissance Hotel

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
1790718	RBH104	None Supplied	0.3	Brown loam and sand with gravel and vegetation.
1790719	RBH104	None Supplied	0.9	Brown loam and sand with gravel and vegetation.
1790720	RBH105	None Supplied	0.3	Brown loam and sand with gravel and stones.
1790721	RBH105	None Supplied	0.5	Brown loam and sand with gravel.
1790722	RBH106	None Supplied	0.35	Brown loam and sand with gravel.

Analytical Report Number : 21-60252
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Sulphate, water soluble, in soil (16hr extraction)	Determination of water soluble sulphate by ICP-OES. Results reported directly (leachate equivalent) and corrected for extraction ratio (soil equivalent).	In house method.	L038-PL	D	MCERTS
Metals in soil by ICP-OES	Determination of metals in soil by aqua-regia digestion followed by ICP-OES.	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L038-PL	D	MCERTS
Asbestos identification in soil	Asbestos Identification with the use of polarised light microscopy in conjunction with disperion staining techniques.	In house method based on HSG 248	A001-PL	D	ISO 17025
Hexavalent chromium in soil	Determination of hexavalent chromium in soil by extraction in water then by acidification, addition of 1,5 diphenylcarbazine followed by colorimetry.	In-house method	L080-PL	W	MCERTS
Moisture Content	Moisture content, determined gravimetrically. (30 oC)	In house method.	L019-UK/PL	W	NONE
Monohydric phenols in soil	Determination of phenols in soil by extraction with sodium hydroxide followed by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	MCERTS
Speciated EPA-16 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270	L064-PL	D	MCERTS
pH in soil (automated)	Determination of pH in soil by addition of water followed by automated electrometric measurement.	In house method.	L099-PL	D	MCERTS
Sulphide in soil	Determination of sulphide in soil by acidification and heating to liberate hydrogen sulphide, trapped in an alkaline solution then assayed by ion selective electrode.	In-house method	L010-PL	D	MCERTS
Total sulphate (as SO ₄ in soil)	Determination of total sulphate in soil by extraction with 10% HCl followed by ICP-OES.	In house method.	L038-PL	D	MCERTS
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Total Sulphur in soil	Determination of total sulphur in soil by extraction with aqua-regia, potassium bromide/bromate followed by ICP-OES.	In house method.	L038-PL	D	MCERTS
Total cyanide in soil	Determination of total cyanide by distillation followed by colorimetry.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	MCERTS
TPH in (Soil)	Determination of TPH bands by HS-GC-MS/GC-FID	In-house method, TPH with carbon banding and silica gel split/cleanup.	L076-PL	D	MCERTS
D.O. for Gravimetric Quant if Screen/ID positive	Dependent option for Gravimetric Quant if Screen/ID positive scheduled.	In house asbestos methods A001 & A006.	A006-PL	D	NONE
Sulphate, water soluble, in soil (1hr extraction)	Sulphate, water soluble, in soil (1hr extraction)	In-house method	L038-PL	D	MCERTS



Analytical Report Number : 21-60252
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
----------------------	-------------------------------	-----------------------------	---------------	--------------------	----------------------

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Unless otherwise indicated, site information, order number, project number, sampling date, time, sample reference and depth are provided by the client. The instructed on date indicates the date on which this information was provided to the laboratory.

**Stuart Ellis**

e3p
Taylor Road
Urmston
Manchester
M41 7JQ

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404

f: 01923 237404

e: reception@i2analytical.com

e: sellis@e3p.co.uk

Analytical Report Number : 21-60269

Project / Site name:	Renaissance Hotel	Samples received on:	03/03/2021
Your job number:	14-261	Samples instructed on/ Analysis started on:	03/03/2021
Your order number:	14-261-JC-I	Analysis completed by:	10/03/2021
Report Issue Number:	1	Report issued on:	10/03/2021
Samples Analysed:	2 wac multi samples		

Signed: *A. Czerwińska*

Agnieszka Czerwińska
Technical Reviewer (Reporting Team)
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :

soils - 4 weeks from reporting
leachates - 2 weeks from reporting
waters - 2 weeks from reporting
asbestos - 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Any assessments of compliance with specifications are based on actual analytical results with no contribution from uncertainty of measurement.
Application of uncertainty of measurement would provide a range within which the true result lies.
An estimate of measurement uncertainty can be provided on request.

i2 Analytical

7 Woodshots Meadow
Croxley Green Business Park
Watford, WD18 8YS

Telephone: 01923 225404
Fax: 01923 237404
email:reception@i2analytical.com

Waste Acceptance Criteria Analytical Results								
Report No:	21-60269							
					Client: E3P			
Location	Renaissance Hotel							
Lab Reference (Sample Number)	1790751				Landfill Waste Acceptance Criteria			
Sampling Date	03/03/2021				Inert Waste Landfill	Stable Non-reactive HAZARDOUS waste in non-hazardous Landfill	Hazardous Waste Landfill	
Sample ID	TP101							
Depth (m)	0.65							
Solid Waste Analysis								
TOC (%)**	0.1				3%	5%	6%	
Loss on Ignition (%) **	0.5				--	--	10%	
BTEX (µg/kg) **	< 10				6000	--	--	
Sum of PCBs (mg/kg) **	< 0.30				1	--	--	
Mineral Oil (mg/kg) #	90				500	--	--	
Total PAH (WAC-17) (mg/kg)	3.10				100	--	--	
pH (units)**	11.1				--	>6	--	
Acid Neutralisation Capacity (mol / kg)	45				--	To be evaluated	To be evaluated	
Eluate Analysis	2:1	8:1		Cumulative 10:1	Limit values for compliance leaching test			
(BS EN 12457 - 3 preparation utilising end over end leaching procedure)	mg/l	mg/l		mg/kg	using BS EN 12457-3 at L/S 10 l/kg (mg/kg)			
Arsenic *	< 0.010	< 0.010		< 0.050	0.5	2	25	
Barium *	0.24	0.090		1.0	20	100	300	
Cadmium *	< 0.0005	< 0.0005		< 0.0020	0.04	1	5	
Chromium *	0.015	0.0062		0.069	0.5	10	70	
Copper *	0.010	0.012		0.12	2	50	100	
Mercury *	< 0.0015	< 0.0015		< 0.010	0.01	0.2	2	
Molybdenum *	0.0069	0.0032		0.035	0.5	10	30	
Nickel *	0.0026	0.0023		0.023	0.4	10	40	
Lead *	< 0.0050	< 0.0050		0.026	0.5	10	50	
Antimony *	< 0.0050	< 0.0050		0.026	0.06	0.7	5	
Selenium *	< 0.010	< 0.010		< 0.040	0.1	0.5	7	
Zinc *	0.0018	0.0036		0.035	4	50	200	
Chloride *	13	< 4.0		30	800	15000	25000	
Fluoride	0.34	0.32		3.2	10	150	500	
Sulphate *	8.9	14		130	1000	20000	50000	
TDS*	830	400		4200	4000	60000	100000	
Phenol Index (Monohydric Phenols) *	< 0.13	< 0.13		< 0.50	1	-	-	
DOC	6.9	5.3		54	500	800	1000	
Leach Test Information								
Stone Content (%)	< 0.1							
Sample Mass (kg)	1.2							
Dry Matter (%)	94							
Moisture (%)	5.8							
Stage 1								
Volume Eluate L2 (litres)	0.34							
Filtered Eluate VE1 (litres)	0.12							
Results are expressed on a dry weight basis, after correction for moisture content where applicable.					* = UKAS accredited (liquid eluate analysis only)			
Stated limits are for guidance only and i2 cannot be held responsible for any discrepancies with current legislation					** = MCERTS accredited			

Landfill WAC analysis (specifically leaching test results) must not be used for hazardous waste classification purposes as defined by the Waste (England and Wales) Regulations 2011 (as amended) and EA Guidance WM3.
This analysis is only applicable for landfill acceptance criteria (The Environmental Permitting (England and Wales) Regulations) and does not give any indication as to whether a waste may be hazardous or non-hazardous.

i2 Analytical

7 Woodshots Meadow
Croxley Green Business Park
Watford, WD18 8YS

Telephone: 01923 225404
Fax: 01923 237404
email:reception@i2analytical.com

Waste Acceptance Criteria Analytical Results								
Report No:	21-60269							
					Client: E3P			
Location	Renaissance Hotel							
Lab Reference (Sample Number)	1790752				Landfill Waste Acceptance Criteria			
Sampling Date	03/03/2021				Inert Waste Landfill	Stable Non-reactive HAZARDOUS waste in non-hazardous Landfill	Hazardous Waste Landfill	
Sample ID	TP103							
Depth (m)	0.45							
Solid Waste Analysis								
TOC (%)**	0.1				3%	5%	6%	
Loss on Ignition (%) **	0.4				--	--	10%	
BTEX (µg/kg) **	< 10				6000	--	--	
Sum of PCBs (mg/kg) **	< 0.30				1	--	--	
Mineral Oil (mg/kg) #	57				500	--	--	
Total PAH (WAC-17) (mg/kg)	2.04				100	--	--	
pH (units)**	11.2				--	>6	--	
Acid Neutralisation Capacity (mol / kg)	69				--	To be evaluated	To be evaluated	
Eluate Analysis	2:1	8:1		Cumulative 10:1	Limit values for compliance leaching test			
(BS EN 12457 - 3 preparation utilising end over end leaching procedure)	mg/l	mg/l		mg/kg	using BS EN 12457-3 at L/S 10 l/kg (mg/kg)			
Arsenic *	< 0.010	< 0.010		< 0.050	0.5	2	25	
Barium *	0.23	0.099		1.1	20	100	300	
Cadmium *	< 0.0005	< 0.0005		< 0.0020	0.04	1	5	
Chromium *	0.015	0.0057		0.063	0.5	10	70	
Copper *	0.016	0.0058		0.065	2	50	100	
Mercury *	< 0.0015	< 0.0015		< 0.010	0.01	0.2	2	
Molybdenum *	0.0047	< 0.0030		0.023	0.5	10	30	
Nickel *	0.0028	0.0023		0.024	0.4	10	40	
Lead *	< 0.0050	< 0.0050		0.023	0.5	10	50	
Antimony *	< 0.0050	< 0.0050		< 0.020	0.06	0.7	5	
Selenium *	< 0.010	< 0.010		< 0.040	0.1	0.5	7	
Zinc *	0.0082	0.0073		0.074	4	50	200	
Chloride *	13	< 4.0		31	800	15000	25000	
Fluoride	0.38	0.31		3.2	10	150	500	
Sulphate *	11	13		130	1000	20000	50000	
TDS*	940	460		4900	4000	60000	100000	
Phenol Index (Monohydric Phenols) *	< 0.13	< 0.13		< 0.50	1	-	-	
DOC	6.9	5.5		56	500	800	1000	
Leach Test Information								
Stone Content (%)	< 0.1							
Sample Mass (kg)	1.2							
Dry Matter (%)	96							
Moisture (%)	4.1							
Stage 1								
Volume Eluate L2 (litres)	0.33							
Filtered Eluate VE1 (litres)	0.12							
Results are expressed on a dry weight basis, after correction for moisture content where applicable.					* = UKAS accredited (liquid eluate analysis only)			
Stated limits are for guidance only and i2 cannot be held responsible for any discrepancies with current legislation					** = MCERTS accredited			

Landfill WAC analysis (specifically leaching test results) must not be used for hazardous waste classification purposes as defined by the Waste (England and Wales) Regulations 2011 (as amended) and EA Guidance WM3.
This analysis is only applicable for landfill acceptance criteria (The Environmental Permitting (England and Wales) Regulations) and does not give any indication as to whether a waste may be hazardous or non-hazardous.



Analytical Report Number : 21-60269
Project / Site name: Renaissance Hotel

* These descriptions are only intended to act as a cross check if sample identities are questioned. The major constituent of the sample is intended to act with respect to MCERTS validation. The laboratory is accredited for sand, clay and loam (MCERTS) soil types. Data for unaccredited types of solid should be interpreted with care.

Stone content of a sample is calculated as the % weight of the stones not passing a 10 mm sieve. Results are not corrected for stone content.

Lab Sample Number	Sample Reference	Sample Number	Depth (m)	Sample Description *
1790751	TP101	None Supplied	0.65	Brown clay and sand with gravel.
1790752	TP103	None Supplied	0.45	Brown clay and sand with gravel.

Analytical Report Number : 21-60269
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Moisture Content	Moisture content, determined gravimetrically. (30 oC)	In house method.	L019-UK/PL	W	NONE
Stones content of soil	Standard preparation for all samples unless otherwise detailed. Gravimetric determination of stone > 10 mm as % dry weight.	In-house method based on British Standard Methods and MCERTS requirements.	L019-UK/PL	D	NONE
Preparation WAC leachate		In-house method	L043-PL	W	NONE
Speciated WAC-17 PAHs in soil	Determination of PAH compounds in soil by extraction in dichloromethane and hexane followed by GC-MS with the use of surrogate and internal standards.	In-house method based on USEPA 8270. MCERTS accredited except Coronene.	L064-PL	D	MCERTS
Chloride in WAC leachate (BS EN 12457-3 Prep)	Determination of Chloride colorimetrically by discrete analyser.	In house based on MEWAM Method ISBN 0117516260.	L082-PL	W	ISO 17025
Fluoride in WAC leachate (BS EN 12457-3 Prep)	Determination of fluoride in leachate by 1:1ratio with a buffer solution followed by Ion Selective Electrode.	In-house method based on Standard Methods for the Examination of Water and Waste Water, 21st Ed.	L033-PL	W	ISO 17025
Phenol Index in WAC leachate (BS EN 12457-3 Prep)	Determination of monohydric phenols in leachate by continuous flow analyser.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Sulphate in WAC leachate (BS EN 12457-3 Prep)	Determination of sulphate in leachate by acidification followed by ICP-OES.	In-house method based on Standard Methods for the Examination of Water and Waste Water, 21st Ed.	L039-PL	W	ISO 17025
TDS in WAC leachate (BS EN 12457-3 Prep)	Determination of total dissolved solids in leachate by electrometric measurement.	In-house method based on Standard Methods for the Examination of Water and Waste Water, 21st Ed.	L031-PL	W	NONE
DOC in WAC leachate (BS EN 12457-3 Prep)	Determination of dissolved organic carbon in leachate by TOC/DOC NDIR analyser.	In-house method based on Standard Methods for the Examination of Water and Waste Water, 21st Ed.	L037-PL	W	NONE
Acid neutralisation capacity of soil	Determination of acid neutralisation capacity by addition of acid or alkali followed by electronic probe.	In-house method based on Guidance an Sampling and Testing of Wastes to Meet Landfill Waste Acceptance	L046-PL	W	NONE
Loss on ignition of soil @ 450oC	Determination of loss on ignition in soil by gravimetrically with the sample being ignited in a muffle furnace.	In house method.	L047-PL	D	MCERTS
Mineral Oil in Soil C10 - C40	Determination of dichloromethane/hexane extractable hydrocarbons in soil by GC-MS.	In-house method based on USEPA 8270	L076-PL	D	NONE
pH in soil	Determination of pH in soil by addition of water followed by electrometric measurement.	In house method.	L005-PL	W	MCERTS
Total organic carbon in soil	Determination of organic matter in soil by oxidising with potassium dichromate followed by titration with iron (II) sulphate.	In house method.	L023-PL	D	MCERTS
Metals in WAC leachate (BS EN 12457-3 Prep)	Determination of metals in leachate by acidification followed by ICP-OES.	In-house method based on Standard Methods for the Examination of Water and Waste Water, 21st Ed.	L039-PL	W	ISO 17025
PCB's by GC-MS in soil	Determination of PCB by extraction with acetone and hexane followed by GC-MS.	In-house method based on USEPA 8082	L027-PL	D	MCERTS

Analytical Report Number : 21-60269
Project / Site name: Renaissance Hotel

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
BTEX (Sum of BTEX compounds) in soil	Determination of BTEX in soil by headspace GC-MS. Individual components MCERTS accredited	In-house method based on USEPA8260	L073B-PL	W	MCERTS

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Unless otherwise indicated, site information, order number, project number, sampling date, time, sample reference and depth are provided by the client. The instructed on date indicates the date on which this information was provided to the laboratory.



Stuart Ellis
e3p
Taylor Road
Urmston
Manchester
M41 7JQ

i2 Analytical Ltd.
7 Woodshots Meadow,
Croxley Green
Business Park,
Watford,
Herts,
WD18 8YS

t: 01923 225404
f: 01923 237404
e: reception@i2analytical.com

e: sellis@e3p.co.uk

Analytical Report Number : 21-68515

Project / Site name:	Deansgate CLR Park	Samples received on:	14/04/2021
Your job number:	14 261	Samples instructed on/ Analysis started on:	14/04/2021
Your order number:	14 261 SE S	Analysis completed by:	21/04/2021
Report Issue Number:	1	Report issued on:	21/04/2021
Samples Analysed:	3 water samples		

Signed: *Karolina Marek*

Karolina Marek
PL Head of Reporting Team
For & on behalf of i2 Analytical Ltd.

Standard Geotechnical, Asbestos and Chemical Testing Laboratory located at: ul. Pionierów 39, 41 -711 Ruda Śląska, Poland.

Accredited tests are defined within the report, opinions and interpretations expressed herein are outside the scope of accreditation.

Standard sample disposal times, unless otherwise agreed with the laboratory, are :

soils - 4 weeks from reporting
leachates - 2 weeks from reporting
waters - 2 weeks from reporting
asbestos - 6 months from reporting

Excel copies of reports are only valid when accompanied by this PDF certificate.

Any assessments of compliance with specifications are based on actual analytical results with no contribution from uncertainty of measurement.
Application of uncertainty of measurement would provide a range within which the true result lies.
An estimate of measurement uncertainty can be provided on request.



Analytical Report Number: 21-68515
Project / Site name: Deansgate CLR Park

Your Order No: 14 261 SE S

Lab Sample Number				1835880	1835881	1835882
Sample Reference				RB 101	RB 104	RB 105
Sample Number				None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied
Date Sampled				13/04/2021	13/04/2021	13/04/2021
Time Taken				None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status			

General Inorganics

pH	pH Units	N/A	ISO 17025	7.3	10.2	10.0
Total Cyanide (Low Level 1 µg/l)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Dissolved Organic Carbon (DOC)	mg/l	0.1	NONE	0.80	6.01	0.97

Total Phenols

Total Phenols (monohydric)	µg/l	1	ISO 17025	4.8	4.8	3.4
----------------------------	------	---	-----------	-----	-----	-----

Heavy Metals / Metalloids

Calcium (dissolved)	mg/l	0.012	ISO 17025	18	22	20
Chromium (hexavalent)	µg/l	5	ISO 17025	< 5.0	< 5.0	< 5.0

Arsenic (dissolved)	µg/l	0.15	ISO 17025	0.39	2.93	1.18
Cadmium (dissolved)	µg/l	0.02	ISO 17025	< 0.02	0.03	< 0.02
Chromium (dissolved)	µg/l	0.2	ISO 17025	1.2	3.8	1.6
Copper (dissolved)	µg/l	0.5	ISO 17025	3.1	8.4	2.9
Lead (dissolved)	µg/l	0.2	ISO 17025	0.2	< 0.2	< 0.2
Manganese (dissolved)	µg/l	0.05	ISO 17025	120	0.60	0.46
Mercury (dissolved)	µg/l	0.05	ISO 17025	< 0.05	1.22	0.07
Nickel (dissolved)	µg/l	0.5	ISO 17025	1.2	2.1	0.5
Selenium (dissolved)	µg/l	0.6	ISO 17025	< 0.6	2.8	2.2
Zinc (dissolved)	µg/l	0.5	ISO 17025	7.8	2.7	2.2

Monoaromatics & Oxygenates

Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
p & m-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
o-xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0

Petroleum Hydrocarbons

TPH1 (C10 - C40)	µg/l	10	NONE	< 10	< 10	< 10
------------------	------	----	------	------	------	------

TPH-CWG - Aliphatic >C5 - C6	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C6 - C8	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C8 - C10	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
TPH-CWG - Aliphatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aliphatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aliphatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aliphatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aliphatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10

TPH-CWG - Aromatic >C5 - C7	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C7 - C8	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C8 - C10	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
TPH-CWG - Aromatic >C10 - C12	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aromatic >C12 - C16	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aromatic >C16 - C21	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aromatic >C21 - C35	µg/l	10	NONE	< 10	< 10	< 10
TPH-CWG - Aromatic (C5 - C35)	µg/l	10	NONE	< 10	< 10	< 10



Analytical Report Number: 21-68515
Project / Site name: Deansgate CLR Park

Your Order No: 14 261 SE S

Lab Sample Number				1835880	1835881	1835882
Sample Reference				RB 101	RB 104	RB 105
Sample Number				None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied
Date Sampled				13/04/2021	13/04/2021	13/04/2021
Time Taken				None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status			

VOCs

Chloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Chloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Bromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Vinyl Chloride	µg/l	1	NONE	< 1.0	< 1.0	< 1.0
Trichlorofluoromethane	µg/l	1	NONE	< 1.0	< 1.0	< 1.0
1,1-Dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,1,2-Trichloro-1,2,2-trifluoroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Cis-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
MTBE (Methyl Tertiary Butyl Ether)	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,1-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
2,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Trichloromethane	µg/l	1	ISO 17025	18.8	8.6	7.9
1,1,1-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2-Dichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,1-Dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Trans-1,2-dichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Benzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Tetrachloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Trichloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Dibromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Bromodichloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Cis-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Trans-1,3-dichloropropene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Toluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,1,2-Trichloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,3-Dichloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Dibromochloromethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Tetrachloroethene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2-Dibromoethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Chlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,1,1,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Ethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
p & m-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Styrene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Tribromomethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
o-Xylene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,1,2,2-Tetrachloroethane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Isopropylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Bromobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
n-Propylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
2-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
4-Chlorotoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,3,5-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
tert-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2,4-Trimethylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
sec-Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,3-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
p-Isopropyltoluene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,4-Dichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0



Analytical Report Number: 21-68515
Project / Site name: Deansgate CLR Park

Your Order No: 14 261 SE S

Lab Sample Number				1835880	1835881	1835882
Sample Reference				RB 101	RB 104	RB 105
Sample Number				None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied
Date Sampled				13/04/2021	13/04/2021	13/04/2021
Time Taken				None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status			
Butylbenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2-Dibromo-3-chloropropane	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2,4-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
Hexachlorobutadiene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0
1,2,3-Trichlorobenzene	µg/l	1	ISO 17025	< 1.0	< 1.0	< 1.0

SVOCs

Aniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Phenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2-Chlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Bis(2-chloroethyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
1,3-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
1,2-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
1,4-Dichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Bis(2-chloroisopropyl)ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Hexachloroethane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Nitrobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
4-Methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Isophorone	µg/l	0.05	NONE	< 0.05	3.1	< 0.05
2-Nitrophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2,4-Dimethylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Bis(2-chloroethoxy)methane	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
1,2,4-Trichlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Naphthalene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
2,4-Dichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
4-Chloroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Hexachlorobutadiene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
4-Chloro-3-methylphenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2,4,6-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2,4,5-Trichlorophenol	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2-Methylnaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2-Chloronaphthalene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Dimethylphthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
2,6-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Acenaphthylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Acenaphthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
2,4-Dinitrotoluene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Dibenzofuran	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
4-Chlorophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Diethyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
4-Nitroaniline	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Fluorene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Azobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Bromophenyl phenyl ether	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Hexachlorobenzene	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Phenanthrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Carbazole	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Dibutyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Anthraquinone	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01



Analytical Report Number: 21-68515
Project / Site name: Deansgate CLR Park

Your Order No: 14 261 SE S

Lab Sample Number				1835880	1835881	1835882
Sample Reference				RB 101	RB 104	RB 105
Sample Number				None Supplied	None Supplied	None Supplied
Depth (m)				None Supplied	None Supplied	None Supplied
Date Sampled				13/04/2021	13/04/2021	13/04/2021
Time Taken				None Supplied	None Supplied	None Supplied
Analytical Parameter (Water Analysis)	Units	Limit of detection	Accreditation Status			
Butyl benzyl phthalate	µg/l	0.05	NONE	< 0.05	< 0.05	< 0.05
Benzo(a)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Chrysene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Benzo(b)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Benzo(k)fluoranthene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Benzo(a)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Indeno(1,2,3-cd)pyrene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Dibenz(a,h)anthracene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
Benzo(ghi)perylene	µg/l	0.01	ISO 17025	< 0.01	< 0.01	< 0.01
3&4-Methylphenol	µg/l	0.1	NONE	< 0.10	< 0.10	< 0.10

U/S = Unsuitable Sample I/S = Insufficient Sample



Analytical Report Number : 21-68515
Project / Site name: Deansgate CLR Park

Water matrix abbreviations: Surface Water (SW) Potable Water (PW) Ground Water (GW)

Analytical Test Name	Analytical Method Description	Analytical Method Reference	Method number	Wet / Dry Analysis	Accreditation Status
Metals in water by ICP-OES (dissolved)	Determination of metals in water by acidification followed by ICP-OES. Accredited Matrices SW, GW, PW, PrW.(Al, Cu,Fe,Zn).	In-house method based on MEWAM 2006 Methods for the Determination of Metals in Soil.	L039-PL	W	ISO 17025
Metals in water by ICP-MS (dissolved)	Determination of metals in water by acidification followed by ICP-MS. Accredited Matrices: SW, GW, PW except B=SW,GW, Hg=SW,PW, Al=SW,PW.	In-house method based on USEPA Method 6020 & 200.8 "for the determination of trace elements in water by ICP-MS.	L012-PL	W	ISO 17025
Hexavalent chromium in water	Determination of hexavalent chromium in water by acidification, addition of 1,5 diphenylcarbazide followed by colorimetry.	In-house method by continuous flow analyser. Accredited Matrices SW, GW, PW.	L080-PL	W	ISO 17025
Monohydric phenols in water - LOW LEVEL 1 ug/l	Determination of phenols in water by continuous flow analyser. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (skalar)	L080-PL	W	ISO 17025
Semi-volatile organic compounds in water	Determination of semi-volatile organic compounds in leachate by extraction in dichloromethane followed by GC-MS.	In-house method based on USEPA 8270	L102B-PL	W	NONE
TPH1 (Waters)	Determination of dichloromethane extractable hydrocarbons in water by GC-MS.	In-house method	L070-PL	W	NONE
TPHCWG (Waters)	Determination of dichloromethane extractable hydrocarbons in water by GC-MS, speciation by interpretation.	In-house method	L070-PL	W	NONE
Volatile organic compounds in water	Determination of volatile organic compounds in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
Dissolved Organic Carbon in water	Determination of dissolved inorganic carbon in water by TOC/DOC NDIR Analyser.	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton	L037-PL	W	NONE
BTEX and MTBE in water (Monoaromatics)	Determination of BTEX and MTBE in water by headspace GC-MS. Accredited matrices: SW PW GW	In-house method based on USEPA8260	L073B-PL	W	ISO 17025
Low level total cyanide in water	Determination of total cyanide by distillation followed by colorimetry. Accredited matrices: SW PW GW	In-house method based on Examination of Water and Wastewater 20th Edition: Clesceri, Greenberg & Eaton (Skalar)	L080-PL	W	ISO 17025
pH at 20oC in water (automated)	Determination of pH in water by electrometric measurement. Accredited matrices: SW PW GW	In house method.	L099-PL	W	ISO 17025

For method numbers ending in 'UK' analysis have been carried out in our laboratory in the United Kingdom.

For method numbers ending in 'PL' analysis have been carried out in our laboratory in Poland.

Soil analytical results are expressed on a dry weight basis. Where analysis is carried out on as-received the results obtained are multiplied by a moisture correction factor that is determined gravimetrically using the moisture content which is carried out at a maximum of 30oC.

Unless otherwise indicated, site information, order number, project number, sampling date, time, sample reference and depth are provided by the client. The instructed on date indicates the date on which this information was provided to the laboratory.

APPENDIX VII

ORIGIN OF TIER I GENERIC ASSESSMENT CRITERIA

Renaissance Hotel

Phase II Geoenvironmental Site Assessment

April 2021

CONSTITUENT	ORIGIN OF RISK ASSESSMENT VALUE
Arsenic	2014 LQM/CIEH S4ULs
Cadmium	2014 LQM/CIEH S4ULs
Chromium	2014 LQM/CIEH S4ULs
Lead	2014 LQM/CIEH S4ULs
Mercury	2014 LQM/CIEH S4ULs – methylmercury
Nickel	2014 LQM/CIEH S4ULs
Selenium	2014 LQM/CIEH S4ULs
Copper	2014 LQM/CIEH S4ULs
Zinc	2014 LQM/CIEH S4ULs
Cyanide – Total	2014 LQM/CIEH S4ULs
Phenols – Total	2014 LQM/CIEH S4ULs
Naphthalene	General assessment criteria (GAC) developed by CIEH/LQM Suitable 4 Use Levels with supporting data from SR3, SR7 and existing Tox report where applicable. 1% SOM.
Acenaphthylene	
Acenaphthene	
Fluorene	
Phenanthrene	
Anthracene	
Fluoranthene	
Pyrene	
Benzo(a)Anthracene	
Chrysene	
Benzo(b/k)Fluoranthene ⁽ⁱⁱⁱ⁾	
Benzo(a)Pyrene	
Indeno(123-cd)Pyrene	
Dibenzo(a,h)Anthracene	
Benzo(ghi)Perylene	
TPH C ₅ -C ₆ (aliphatic)	
TPH C ₆ -C ₈ (aliphatic)	
TPH C ₈ -C ₁₀ (aliphatic)	
TPH C ₁₀ -C ₁₂ (aliphatic)	
TPH C ₁₂ -C ₁₆ (aromatic)	
TPH C ₁₆ -C ₂₁ (aromatic)	
TPH C ₂₁ -C ₃₅ (aromatic)	



APPENDIX VIII

GEOTECHNICAL TESTING

CERTIFICATES



LABORATORY REPORT



4043

Contract Number: PSL21/1855

Report Date: 30 March 2021

Client's Reference: 14-261

Client Name: E3P
Taylor Road
Urmston
Manchester
M41 7JQ

For the attention of: Jamie Craig

Contract Title: Renaissance Deansgate

Date Received: 4/3/2021

Date Commenced: 4/3/2021

Date Completed: 30/3/2021

Notes: Opinions and Interpretations are outside the UKAS Accreditation

A copy of the Laboratory Schedule of accredited tests as issued by UKAS is attached to this report. This certificate is issued in accordance with the accreditation requirements of the United Kingdom Accreditation Service. The results reported herein relate only to the material supplied to the laboratory. This certificate shall not be reproduced other than in full, without the prior written approval of the laboratory.

Checked and Approved Signatories:

A Watkins
(Director)

R Berriman
(Quality Manager)

S Royle
(Laboratory Manager)

L Knight
(Senior Technician)


S Eyre
(Senior Technician)

H Daniels
(Senior Technician)

5 – 7 Hexthorpe Road, Hexthorpe,
Doncaster DN4 0AR
tel: +44 (0)844 815 6641
fax: +44 (0)844 815 6642
e-mail: rberriman@prosoils.co.uk
awatkins@prosoils.co.uk

Page 1 of

SUMMARY OF LABORATORY SOIL DESCRIPTIONS

[illegible]

4043

PSL
Professional Soils Laboratory

Renaissance Deansgate

Contract No:

PSL21/1855

Client Ref:

14-261

DRY DENSITY / MOISTURE CONTENT RELATIONSHIP

BS 1377 : Part 4 : Clause 3.5 : 1990

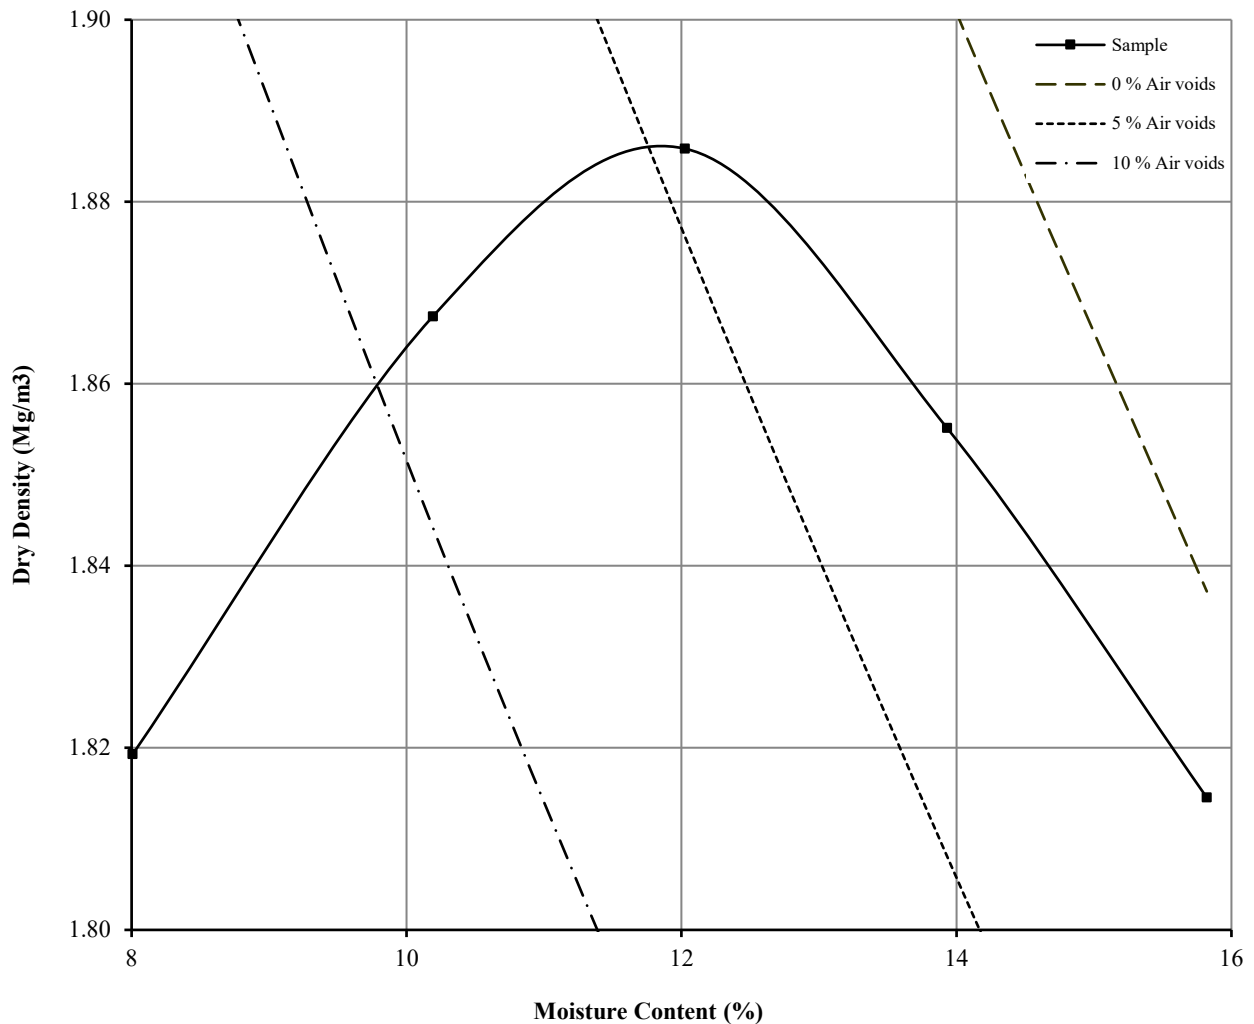
Hole Number: RBH101

Top Depth (m) : 0.80

Sample Number:

Base Depth (m) :

Sample Type: B



Initial Moisture Content:	22	Method of Compaction:	4.5kg	Separate Samples
Particle Density (Mg/m ³):	2.59	Measured	Material Retained on 37.5 mm Test Sieve (%):	0
Maximum Dry Density (Mg/m ³):	1.89		Material Retained on 20.0 mm Test Sieve (%):	0
Optimum Moisture Content (%):	12			
Remarks See summary of soil descriptions				



PSL
Professional Soils Laboratory

Renaissance Deansgate

Contract
PSL21/1855
Client Ref
14-261

DETERMINATION OF UNCONFINED COMPRESSIVE STRENGTH

ISRM Suggested Methods, pp 111 –116, 1981.

[illegible]

Renaissance Deansgate

Contract No:

PSL21/1855

Client Ref:

14-261

SUMMARY OF POINT LOAD TEST RESULTS


ISRM Suggested Methods : 2007

Borehole Number	Depth (m)	Sample Ref	Test Type	Orientation Par / Perp	Dimensions (mm)		Area (mm ²)	D _c ²	D _c (mm)	Failure Load (P)		I _s (MPa)	Corr Fac F	I _{s50} (MPa)	Failure Type	Remarks
					W	D				(Mpa)	(kN)					
RBH101	2.30		A	Perp	88	53	4664	5938.39	77.06	-	0.21	0.04	1.215	0.04	Valid	
RBH101	6.28		A	Perp	88	50	4400	5602.25	74.85	-	1.01	0.18	1.199	0.22	Valid	
RBH101	7.47		A	Perp	88	50	4400	5602.25	74.85	-	1.43	0.26	1.199	0.31	Valid	
RBH101	8.82		A	Perp	88	54	4752	6050.43	77.78	-	0.99	0.16	1.220	0.20	Valid	
RBH101	6.71		A	Perp	89	40	3560	4532.73	67.33	-	0.81	0.18	1.143	0.20	Valid	
RBH102	7.23		A	Perp	88	53	4664	5938.39	77.06	-	1.59	0.27	1.215	0.33	Valid	
RBH102	1.86		A	Perp	85	50	4250	5411.27	73.56	-	0.97	0.18	1.190	0.21	Valid	
RBH102	8.82		A	Perp	88	44	3872	4929.98	70.21	-	0.77	0.16	1.165	0.18	Valid	
RBH102	9.65		A	Perp	89	50	4450	5665.92	75.27	-	0.69	0.12	1.202	0.15	Valid	
RBH102	9.30		A	Perp	86	45	3870	4927.44	70.20	-	0.48	0.10	1.165	0.11	Valid	
RBH102	8.64		A	Perp	89	33	2937	3739.50	61.15	-	1.12	0.30	1.095	0.33	Valid	
RBH103	1.50		A	Perp	89	37	3293	4192.78	64.75	-	1.59	0.38	1.123	0.43	Valid	
RBH103	3.40		A	Perp	89	55	4895	6232.51	78.95	-	2.01	0.32	1.228	0.40	Valid	
RBH103	8.60		A	Perp	89	41	3649	4646.05	68.16	-	0.84	0.18	1.150	0.21	Valid	
RBH104	2.43		A	Perp	85	45	3825	4870.14	69.79	-	0.47	0.10	1.162	0.11	Valid	
RBH104	3.36		A	Perp	88	44	3872	4929.98	70.21	-	1.45	0.29	1.165	0.34	Valid	
RBH104	5.60		A	Perp	87	40	3480	4430.87	66.56	-	0.83	0.19	1.137	0.21	Valid	
RBH104	7.26		A	Perp	87	46	4002	5095.50	71.38	-	2.06	0.40	1.174	0.47	Valid	
RBH105	1.10		A	Perp	88	43	3784	4817.94	69.41	-	0.63	0.13	1.159	0.15	Valid	
RBH105	5.00		A	Perp	83	41	3403	4332.83	65.82	-	1.46	0.34	1.132	0.38	Valid	
RBH105	6.80		A	Perp	89	50	4450	5665.92	75.27	-	1.12	0.20	1.202	0.24	Valid	
RBH105	9.73		A	Perp	86	52	4472	5693.93	75.46	-	1.45	0.25	1.203	0.31	Valid	

***Note** All testing carried out on samples at as received water content

Par = parallel, Perp = perpendicular, U = Random

A = Axial, D = Diametral, I = Irregular

 4043		Renaissance Deansgate	Contract No:
			PSL21/1855
			Client Ref:
			14-261


SUMMARY OF POINT LOAD TEST RESULTS

ISRM Suggested Methods : 2007

Borehole Number	Depth (m)	Sample Ref	Test Type	Orientation	Dimensions (mm)		D_c^2	D_c (mm)	Failure Load		I_s (MPa)	Corr Fac F	I_{s50} (MPa)	Failure Type	Remarks
				Par / Perp	L	D			(Mpa)	(kN)					
RBH101	2.30		D	Par	-	88	7744	88.00	-	0.33	0.043	1.290	0.05	Valid	
RBH101	6.28		D	Par	-	88	7744	88.00	-	0.72	0.093	1.290	0.12	Valid	
RBH101	7.47		D	Par	-	88	7744	88.00	-	1.09	0.141	1.290	0.18	Valid	
RBH101	8.82		D	Par	-	88	7744	88.00	-	0.69	0.089	1.290	0.11	Valid	
RBH101	6.71		D	Par	-	89	7921	89.00	-	0.68	0.086	1.296	0.11	Valid	
RBH102	7.23		D	Par	-	88	7744	88.00	-	0.73	0.094	1.290	0.12	Valid	
RBH102	1.86		D	Par	-	85	7225	85.00	-	0.85	0.118	1.270	0.15	Valid	
RBH102	8.82		D	Par	-	88	7744	88.00	-	0.54	0.070	1.290	0.09	Valid	
RBH102	9.65		D	Par	-	89	7921	89.00	-	0.45	0.057	1.296	0.07	Valid	
RBH102	9.30		D	Par	-	86	7396	86.00	-	0.48	0.065	1.276	0.08	Valid	
RBH102	8.64		D	Par	-	89	7921	89.00	-	1.28	0.162	1.296	0.21	Valid	
RBH103	1.50		D	Par	-	89	7921	89.00	-	1.06	0.134	1.296	0.17	Valid	
RBH103	3.40		D	Par	-	89	7921	89.00	-	1.11	0.140	1.296	0.18	Valid	
RBH103	8.60		D	Par	-	89	7921	89.00	-	1.10	0.139	1.296	0.18	Valid	
RBH104	2.43		D	Par	-	85	7225	85.00	-	0.41	0.057	1.270	0.07	Valid	
RBH104	3.36		D	Par	-	88	7744	88.00	-	1.01	0.130	1.290	0.17	Valid	
RBH104	5.60		D	Par	-	87	7569	87.00	-	0.76	0.100	1.283	0.13	Valid	
RBH104	7.26		D	Par	-	87	7569	87.00	-	1.44	0.190	1.283	0.24	Valid	
RBH105	1.10		D	Par	-	88	7744	88.00	-	0.43	0.056	1.290	0.07	Valid	
RBH105	5.00		D	Par	-	83	6889	83.00	-	0.33	0.048	1.256	0.06	Valid	
RBH105	6.80		D	Par	-	89	7921	89.00	-	0.61	0.077	1.296	0.10	Valid	
RBH105	9.73		D	Par	-	86	7396	86.00	-	1.51	0.204	1.276	0.26	Valid	

***Note** All testing carried out on samples at as received water content

Par = parallel, Perp = perpendicular, U = Random

		Renaissance Deansgate		Contract No:
				PSL21/1855
				Client Ref:
				14-261

SUMMARY OF POINT LOAD TEST RESULTS

ISRM Suggested Methods : 2007

[illegible]

***Note** All testing carried out on samples at as received water content

Par = parallel, Perp = perpendicular, U = Random

A = Axial, D = Diametral, I = Irregular



Renaissance Deansgate

Contract No:

PSL21/1855

Client Ref:

14-261

SUMMARY OF POINT LOAD TEST RESULTS

ISRM Suggested Methods : 2007

[illegible]

***Note** All testing carried out on samples at as received water content

Par = parallel, Perp = perpendicular, U = Random



Renaissance Deansgate

Contract No:

PSL21/1855

Client Ref:

14-261