


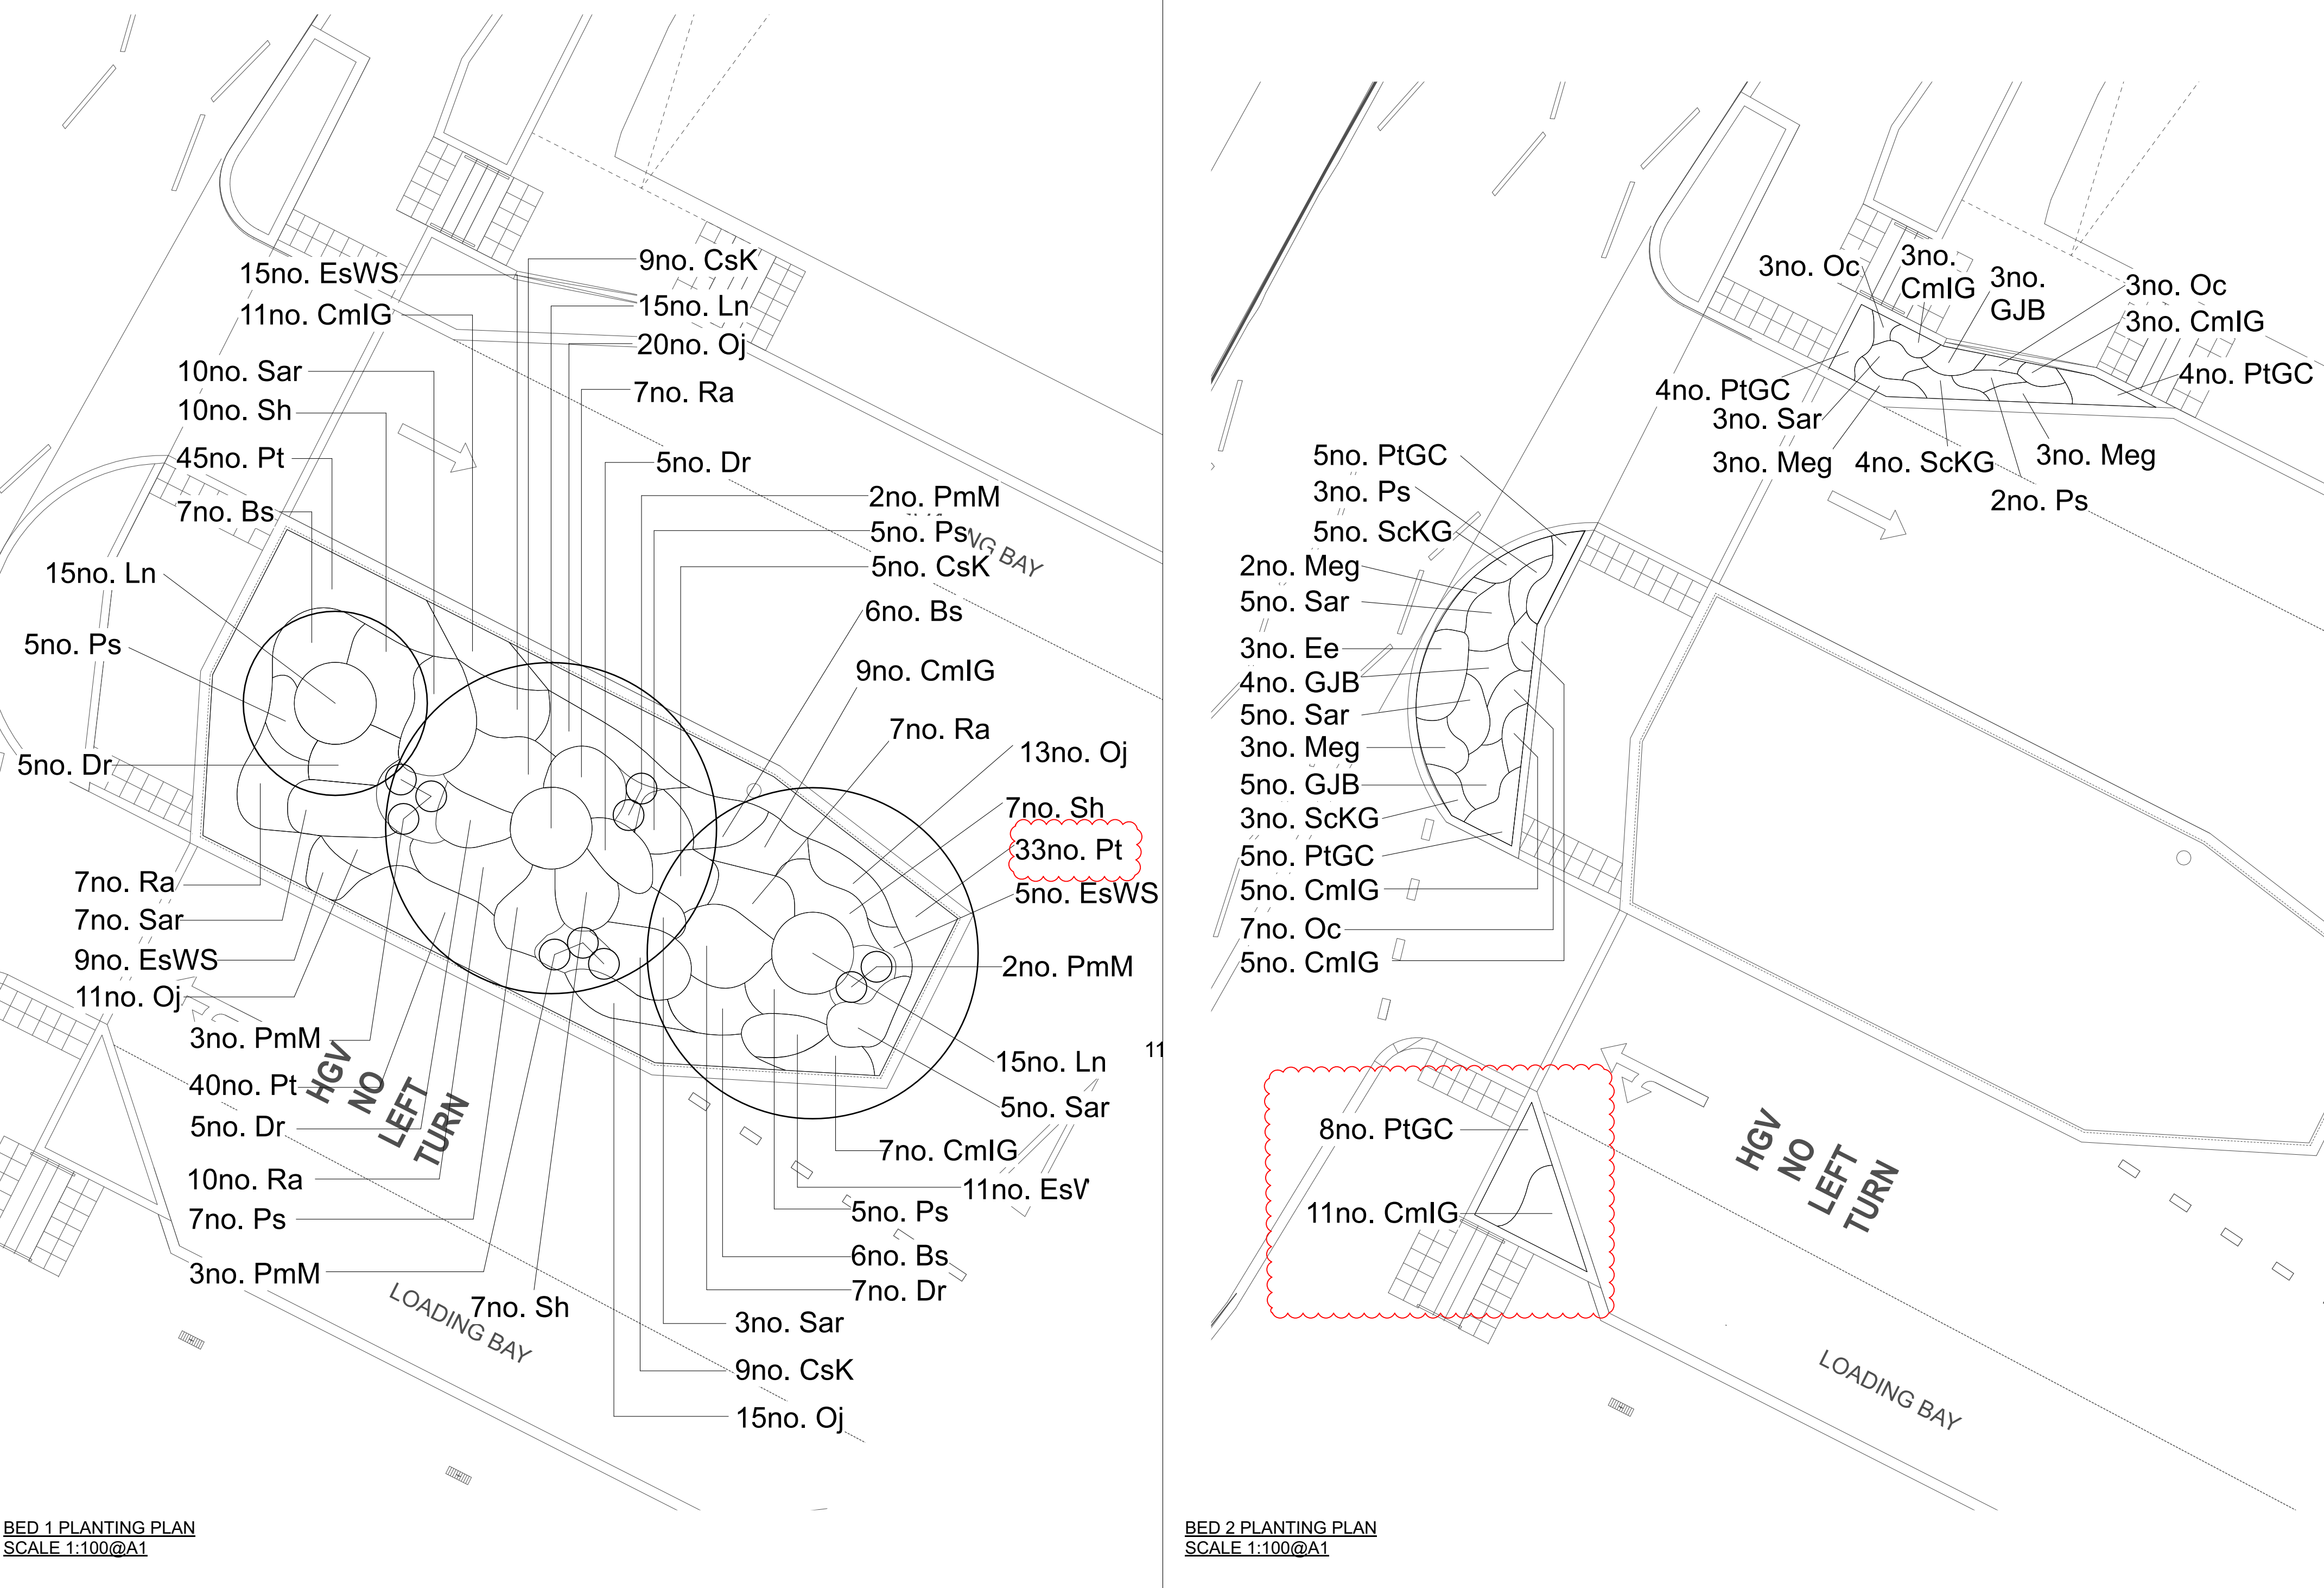

Planting Bed 1 <table><tr><th>Abbrev.</th><th>Qty</th><th>Name</th><th>Height (cm)</th><th>Root Type</th><th>Container Size</th><th>Habit</th><th>Min. no. of Breaks</th><th>Density</th><th>Density Type</th></tr><tr><td>Bs</td><td>19</td><td>Blechnum spicant</td><td></td><td>C</td><td>3L</td><td></td><td></td><td>3</td><td>m²</td></tr><tr><td>CmlG</td><td>27</td><td>Carex marrow 'Iris Green'</td><td></td><td>C</td><td>3L</td><td></td><td></td><td>5</td><td>m²</td></tr><tr><td>CsK</td><td>23</td><td>Cornus stolonifera 'Kelsey'</td><td>30-40</td><td>C</td><td>5L</td><td>Several Shoots</td><td>5</td><td>3</td><td>m²</td></tr><tr><td>Dr</td><td>22</td><td>Danae racemosa</td><td>30-40</td><td>C</td><td>5L</td><td>Bushy</td><td>4</td><td>2</td><td>m²</td></tr><tr><td>EsWS</td><td>40</td><td>Epimedium stellulatum 'Wudang Star'</td><td></td><td>C</td><td>3L</td><td></td><td></td><td>7</td><td>m²</td></tr><tr><td>Ln</td><td>45</td><td>Luzula nivea</td><td></td><td>C</td><td>3L</td><td></td><td></td><td>4</td><td>m²</td></tr><tr><td>Oj</td><td>59</td><td>Ophiopogon japonicus</td><td></td><td>C</td><td>3L</td><td></td><td></td><td>8</td><td>m²</td></tr><tr><td>Pt</td><td>118</td><td>Pachysandra terminalis 'Green Carpet'</td><td>20-30(D)</td><td>C</td><td>5L</td><td>Several Shoots</td><td>11</td><td>3</td><td>m²</td></tr><tr><td>PmM</td><td>10</td><td>Pinus mugo 'Mops'</td><td>30-40</td><td>C</td><td>10-15L</td><td>Bushy</td><td></td><td>2</td><td>m²</td></tr><tr><td>Ps</td><td>22</td><td>Polystichum setiferum</td><td></td><td>C</td><td>3L</td><td></td><td></td><td>3</td><td>m²</td></tr><tr><td>Ra</td><td>31</td><td>Ruscus aculeatus</td><td>60-80</td><td>C</td><td>5L</td><td>Bushy</td><td>7</td><td>3</td><td>m²</td></tr><tr><td>Sh</td><td>24</td><td>Sarcococca humilis</td><td>25-30</td><td>C</td><td>5L</td><td>Bushy</td><td>6</td><td>3</td><td>m²</td></tr><tr><td>Sar</td><td>25</td><td>Stipa arundinacea</td><td></td><td>C</td><td>5-7.5L</td><td></td><td></td><td>3</td><td>m²</td></tr></table>										Abbrev.	Qty	Name	Height (cm)	Root Type	Container Size	Habit	Min. no. of Breaks	Density	Density Type	Bs	19	Blechnum spicant		C	3L			3	m²	CmlG	27	Carex marrow 'Iris Green'		C	3L			5	m²	CsK	23	Cornus stolonifera 'Kelsey'	30-40	C	5L	Several Shoots	5	3	m²	Dr	22	Danae racemosa	30-40	C	5L	Bushy	4	2	m²	EsWS	40	Epimedium stellulatum 'Wudang Star'		C	3L			7	m²	Ln	45	Luzula nivea		C	3L			4	m²	Oj	59	Ophiopogon japonicus		C	3L			8	m²	Pt	118	Pachysandra terminalis 'Green Carpet'	20-30(D)	C	5L	Several Shoots	11	3	m²	PmM	10	Pinus mugo 'Mops'	30-40	C	10-15L	Bushy		2	m²	Ps	22	Polystichum setiferum		C	3L			3	m²	Ra	31	Ruscus aculeatus	60-80	C	5L	Bushy	7	3	m²	Sh	24	Sarcococca humilis	25-30	C	5L	Bushy	6	3	m²	Sar	25	Stipa arundinacea		C	5-7.5L			3	m²	Workmanship and Maintenance Generally All works will be subject to the following British Standards :- Construction: BS 4428 : 1989 General Landscape Operations BS 3936 : Part 1 2013 Nursery Stock (Specification for trees and shrubs) BS 3936 : Part 4 2013 Nursery Stock (Specification for forest trees) BS 3936 : Part 9 2013 Nursery Stock (Specification for bulbs, corms and tubers) BS 3936 : Part 10 2013 Nursery Stock (Specification for ground cover plants) BS 5837 : 2012 Trees in Relation to Construction BS 3882 : 2015 Topsoil BS 4043 : 1989 Transplanting root based trees BS 5236 : 1975 Cultivating and planting advance nursery stock Maintenance: BS 7370:part1: 1991 Grounds maintenance (part 1. Recommendations for establishing and managing grounds maintenance organisations and design considerations BS 7370:part2: 1994 Grounds maintenance part 2. Recommendations for the maintenance of hard areas (excluding sports surfaces) BS 7370:part3: 1991 Grounds maintenance part 3. Recommendations for maintenance of amenity and functional turf (other than sports turf) BS 7370:part4: 1993 Grounds maintenance part 4. Recommendations for maintenance of soft landscape (other than amenity turf) PLANTING NOTES 1. Plant handling at the nursery, and during transit up to delivery , shall be in accordance with 'Plant Handling' the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association) which refers to the receipt, unloading and temporary storage of plants. 2. Plants shall be first class examples of their species or variety, free from all pests and diseases with good fibrous root systems and materially undamaged. (Refer to relevant sections of BS3936 Parts 1-10 'Specification of Nursery Stock') 3. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'. 4. For rootball anchor fixing system - refer to tree pit detail 5. The contractor must ascertain for himself the exact location of any underground services and maintenance points. 6. At the time of planting, areas will be covered by an approved depth of topsoil: i) Topsoil to shrub areas to be 300mm depth with 300mm depth subsoil ii) Topsoil to tree pits to be 300mm deep plus 600mm subsoil Imported topsoil is to be approved via a sample delivery and soil testing results in accordance with the requirements of BS3882:2015 prior to installation. 7. Water as necessary to ensure the establishment and continued thriving of planted and grassed matter. 8. Carry out all work when soil and weather conditions are suitable: i) Do not plant during periods of frost or strong winds. Plant only during the following periods - Bare root deciduous trees and shrubs: Late October to late March - Container grown plants: At any time if ground water and weather conditions are favourable. Ensure that adequate watering and weed control is available. - Bulbs- autumn. 9. All planting areas are to be mulched to a consolidated depth of 50mm using approved Grade A Amenity Bark.	LOCATION PLAN OF PLANTING BEDS
Abbrev.	Qty	Name	Height (cm)	Root Type	Container Size	Habit	Min. no. of Breaks	Density	Density Type																																																																																																																																														
Bs	19	Blechnum spicant		C	3L			3	m²																																																																																																																																														
CmlG	27	Carex marrow 'Iris Green'		C	3L			5	m²																																																																																																																																														
CsK	23	Cornus stolonifera 'Kelsey'	30-40	C	5L	Several Shoots	5	3	m²																																																																																																																																														
Dr	22	Danae racemosa	30-40	C	5L	Bushy	4	2	m²																																																																																																																																														
EsWS	40	Epimedium stellulatum 'Wudang Star'		C	3L			7	m²																																																																																																																																														
Ln	45	Luzula nivea		C	3L			4	m²																																																																																																																																														
Oj	59	Ophiopogon japonicus		C	3L			8	m²																																																																																																																																														
Pt	118	Pachysandra terminalis 'Green Carpet'	20-30(D)	C	5L	Several Shoots	11	3	m²																																																																																																																																														
PmM	10	Pinus mugo 'Mops'	30-40	C	10-15L	Bushy		2	m²																																																																																																																																														
Ps	22	Polystichum setiferum		C	3L			3	m²																																																																																																																																														
Ra	31	Ruscus aculeatus	60-80	C	5L	Bushy	7	3	m²																																																																																																																																														
Sh	24	Sarcococca humilis	25-30	C	5L	Bushy	6	3	m²																																																																																																																																														
Sar	25	Stipa arundinacea		C	5-7.5L			3	m²																																																																																																																																														
Refer to drawing NP4-PLA-04-XX-DR-L-2001 for tree plan	REVISION NOTES 1. Bed 1/2 quantities updated in line with revised layout.	<table><tr><td>client</td><td colspan="2">MEPC</td></tr><tr><td>Project</td><td colspan="2">Noma, Plot P, Manchester</td></tr><tr><td>Drg Title</td><td colspan="2">Planting plan - Service yard</td></tr><tr><td>Created on</td><td>Created by</td><td>Approved by</td></tr><tr><td>05.04.19</td><td>AT</td><td>KR</td></tr><tr><td>Scale</td><td>Size</td><td>Workstage</td></tr><tr><td>1:100</td><td>A1</td><td>Stage 5</td></tr><tr><td>Drg No.</td><td>Suitability</td><td>Revision</td></tr><tr><td>NP4-PLA-04-XX-DR-L-2004</td><td>S4</td><td>P01</td></tr></table> S4-C01 S4-P01 Revision 26.07.22 04.12.20 Date Stage 5 Stage 4 Description LK AT Drawn KR AT Appr'd. Plantit I.E. Limited E: info@plantit.ie.com W: plantit.ie.com MANCHESTER 2 Back Grafton St., Altrincham, WA14 1DY T: 0161 928 9281 LONDON Unit 6 Waterside, 44-48 Wharf Road, London, N1 7UX T: 0207 253 5678 LIVERPOOL No. 8 Princes Parade, Princes Dock, Liverpool, L3 1DL T: 0151 705 6746 THIS DRAWING IS COPYRIGHT PROTECTED AND MAY NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN AUTHORITY FROM THE OWNER. NOTES: 1. Do not scale from this drawing. 2. Always work to noted dimensions. 3. All dimensions are in millimetres unless otherwise stated. 4. All setting out, levels and dimensions to be agreed on site. 5. The dimensions of all materials must be checked on site before being laid out. 6. This drawing must be read with the relevant specification clauses and detail drawings. 7. Order of construction and setting out to be agreed on site.	client	MEPC		Project	Noma, Plot P, Manchester		Drg Title	Planting plan - Service yard		Created on	Created by	Approved by	05.04.19	AT	KR	Scale	Size	Workstage	1:100	A1	Stage 5	Drg No.	Suitability	Revision	NP4-PLA-04-XX-DR-L-2004	S4	P01																																																																																																																										
client	MEPC																																																																																																																																																						
Project	Noma, Plot P, Manchester																																																																																																																																																						
Drg Title	Planting plan - Service yard																																																																																																																																																						
Created on	Created by	Approved by																																																																																																																																																					
05.04.19	AT	KR																																																																																																																																																					
Scale	Size	Workstage																																																																																																																																																					
1:100	A1	Stage 5																																																																																																																																																					
Drg No.	Suitability	Revision																																																																																																																																																					
NP4-PLA-04-XX-DR-L-2004	S4	P01																																																																																																																																																					

S4-C01	26.07.22	Stage 5	LK	KR
S4-P01	04.12.20	Stage 4	AT	AT
Revision	Date	Description	Drawn	Apprvd.