

A detailed architectural sketch of the 522M Albert Bridge House, a modern multi-story building with a glass facade and extensive greenery on its balconies and roof. The building is situated next to a canal, with a bridge and other urban structures visible in the background. The sketch is rendered in a hand-drawn style with colored pencils or markers.

522M Albert Bridge House
Drainage Strategy Report
December 2022

Consulting Structural and Civil Engineers

AKT II Ltd

White Collar Factory
1 Old Street Yard
London EC1Y 8AF

T +44 (0)20 7250 7777
F +44 (0)20 7250 7555
info@akt-uk.com

Contents

1	Introduction	3
2	Requirements of National Planning Policy Framework (NPPF) & Local Supplementary Planning Documents	4
2.1	NPPF	4
2.2	Local Standards and Guidance	4
3	Surface water drainage	5
3.1	Existing site	5
3.2	Proposed site	5
3.3	Disposal methods	6
	SuDS management train	6
	Drainage hierarchy	6
	Assessment of SuDS techniques	6
	Summary of the Proposed SuDS Strategy	7
4	Flood risk assessment requirements	8
5	Foul water drainage	9
5.1	Existing scheme	9
5.2	Proposed scheme	9
6	Overflow pipe diversion	10
7	BREEAM	11
	Pol 03: Flood and surface water management	11
	Assessment of available credits	12
8	Maintenance and operation	13
8.1	General drainage	13
8.2	Pumped systems	13
8.3	Attenuation tanks	13
8.4	Petrol separators	13
8.5	Blue / Green Roofs	14
8.6	Outlets from blue roof	14
9	Drainage design standards	14
10	Materials	14

Appendices	
A	Topographic survey drawing
B	SuDS Strategy
C	Pre-planning enquiry correspondence with United Utilities
D	Proposed sewer diversion drawings
E	Geological Maps

B	02.12.2022	Issued for Information
A	16.09.2022	Draft Issue
Revision	Date	Status
Prepared by:	Stefano Zilio	
Checked by:	Dariusz Nowacki	
Approved by:	David Purcell	

1 Introduction

AKT II have been commissioned to undertake a foul and surface water drainage strategy in support of the proposed redevelopment of Albert Bridge House on behalf of Oval, the Client.

The site area is approximately 0.912 hectares and consists of an office building with open ground level car parking and a public area adjacent to the River Irwell. The proposed scheme involves the demolition of all existing structures and will provide a mixed-use scheme, comprising of office space, residential lets and new retail offerings at ground floor as well as a new public realm to the external areas around the buildings.

The site is located in central Manchester, Bridge Street (M3 5AH) and is adjacent to retail and commercial areas, as well as bordering the River Irwell. The Northings and Eastings for the development land are 383420, 398370 respectively.

The site slopes from St. Mary's Parsonage in the East down to Albert Bridge to the West and significantly further towards the River Irwell to the North-west. The current levels vary from circa 33 m AoD to the north-east down to 21m AoD on the riverbank to the north-west.

This report is intended to cover only the aspects of drainage design and provide the guidelines and parameters for the detailed design at later /more advanced stages of the project

This report has been prepared in accordance with the guidance contained in the National Policy Framework (NPPF) and the accompanying Planning Practice guidance and a more detailed explanation of the requirements nationally and locally are laid out in Section 2 of this report.

The following drainage report and strategy will need to be approved by the Lead Local Flood Authority (LLFA) to obtain planning approval and satisfy the relevant consultees (the local Water Authority and the Environment Agency, where relevant).

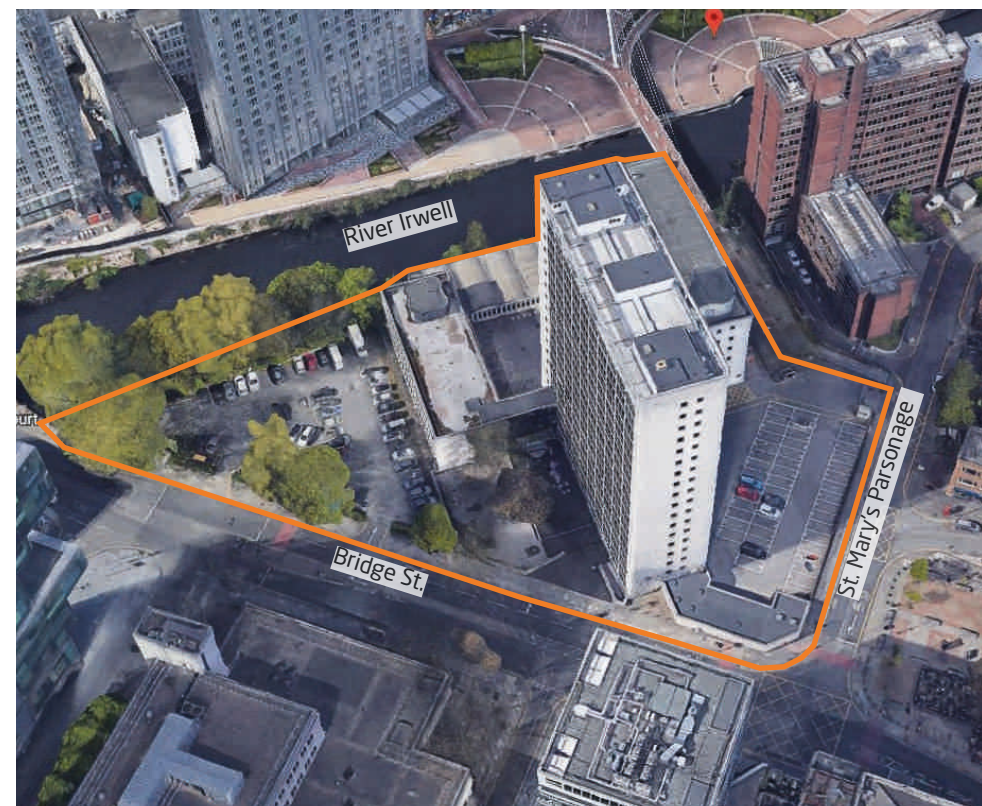


Figure 1.1 Existing site - Aerial view



Figure 1.2 Massing view (Studio Egret West)

2 Requirements of National Planning Policy Framework (NPPF) & Local Supplementary Planning Documents

2.1 NPPF

The National Planning Policy Framework (NPPF) superseded Planning Policy Statement 25 “Development and Flood Risk” (PPS 25) although the requirements and goals remain essentially the same:

- The susceptibility of land to flooding is a material planning consideration;
- The Environment Agency has the lead role in providing advice on flood issues, at a strategic level and in relation to planning applications;
- Planning decisions should apply the precautionary principle to the issue of flood risk, using a risk-based search sequence to avoid inappropriate development on undeveloped and undefended flood plains etc;
- Developers should fund flood defences and warning measures required because of the development;
- Planning policies and decisions should recognise that the consideration of flood risk and its management needs to be applied on a whole-catchment basis and not only be restricted to flood plains.

With regard to the NPPF, those proposing particular developments are responsible for:

- Providing an assessment of whether any proposed development is likely to be affected by flooding and whether it will increase flood risk elsewhere and the measures proposed to deal with these effects and risks and;
- Satisfying the local planning authority that any flood risk to the development or additional risk arising from the proposal will be successfully managed with the minimum environmental effect thus ensuring the safe development and secure future occupancy of the site.

After this has been addressed, it is then the local planning authority’s responsibility (advised as necessary by the Environment Agency on fluvial and tidal flood risk, and the LLFA on surface water flood risk) to determine an application for planning permission after taking into account all material considerations, including the issue of flood risk and how it might be managed or mitigated. Local planning authorities are required to adopt a risk-based approach to proposals for development in flood risk areas.

2.2 Local Standards and Guidance

Strategic Flood Risk Assessments (SFRA) are produced by Local Authorities in order to form the basis for preparing appropriate policies for flood risk management. The Environment Agency advise that Developers “should consult the Strategic Flood Risk Assessment prepared by your local planning authority” when preparing their design.

The site is the subject of the Manchester City, Salford City and Trafford Councils Level 2 Hybrid SFRA dated March 2011. The key findings and recommendations from this report are:

- The likely sources of flooding within the Greater Manchester area include surface water and rivers.
 - The site lies within a Critical Drainage Area (CDA) identified as Conurbation Core (see Figure 2.2). A Critical Drainage Area is defined as “an area that has critical drainage problems and which has been notified to the local planning authority as such be the Environment Agency in line with the NPPF”.
 - The majority of the site is situated in Zone 1 – land assessed as having a less than 1 in 1000 annual probability of river or sea flooding (<0.1%).
 - Part of the site (riverbank) is situated in flood zone 3a – land assessed as having a annual probability of river flooding higher than 1 in 100 (>1.0%) and sea flooding higher 1 in 200 (0.5%).
- The Environment Agency splits flood zone 3 in flood zone 3a and flood zone 3b – functional floodplain. The site’s riverbank seems to be situated in flood zone 3a.
- The EA maintains the River Irwell Flood Control Scheme which was designed to provide a 1 in 75 year standard of protection through Kersal and Lower Broughton.

Refer to the Flood Risk Assessment produced by AKT II for detailed assessment.

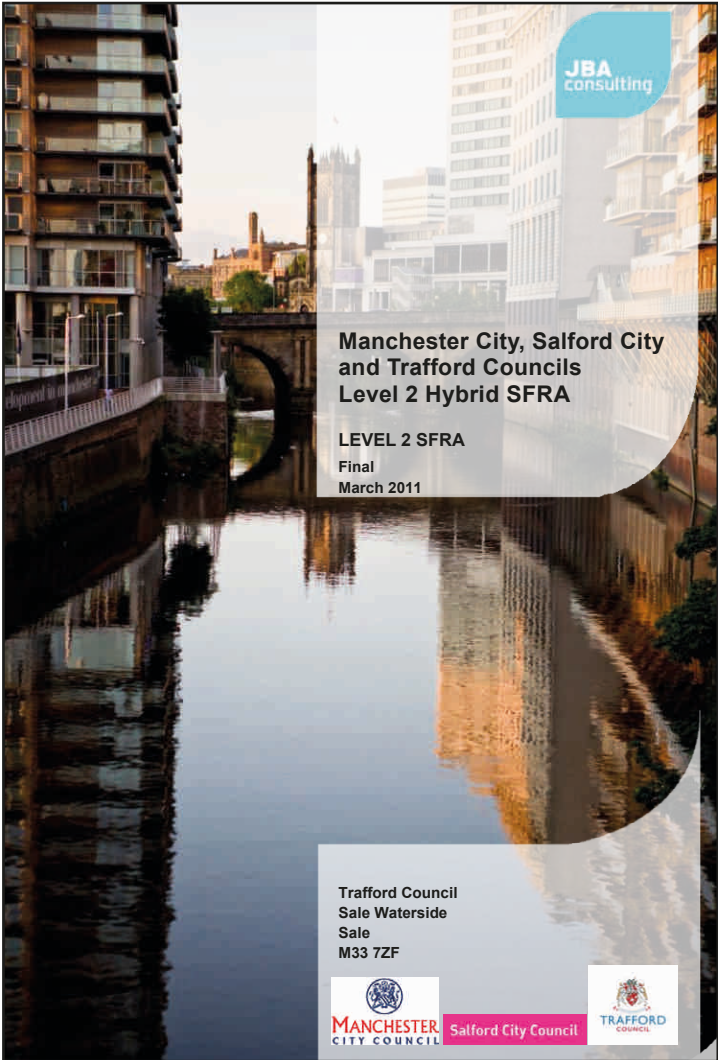


Figure 2.1 SFRA for Greater Manchester - cover page

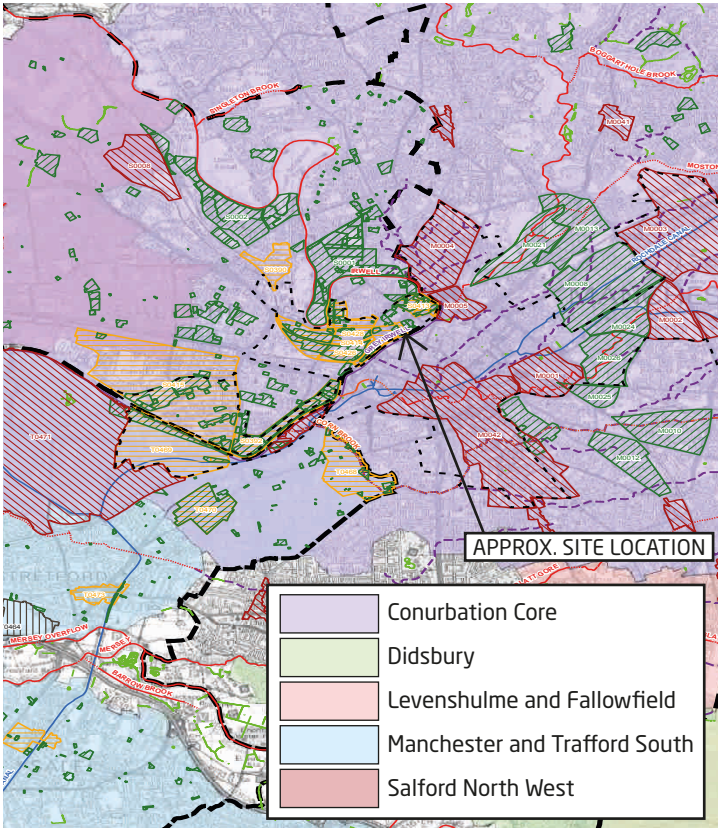


Figure 2.2 SFRA of Greater Manchester Critical Drainage Area Map

3 Surface water drainage

3.1 Existing site

The available United Utilities record plans indicate that the closest surface water or combined public sewers to the site are:

- A 300mm dia. combined sewer running from north to south under St. Mary’s Parsonage, to the east of the site. This then increases to 525mm dia. and continues towards west under Bridge St. to the south of the site.
- A 300mm dia. combined sewer running under Bridge St. to the south-west of the site.
- A 530x830mm combined water sewer running from the south-east to the south-west under Bridge St., to the south of the site. This increases to 510x850mm and successively to 620x1010mm.
- A 610 x 860mm combined water overflow running within the site, to the south-west. We assume that this overflow would take the excess water from the 525mm combined water sewer and discharges it into the River Irwell in extreme rainfall or emergency surcharge events.
- A 630 x 870mm combined water overflow crossing the site to the south-west. We assume that this overflow would take the excess water from the 620 x 1010mm combined water sewer under Bridge St. and discharges it into the River Irwell in extreme rainfall or emergency surcharge events.

An extract from the record plans is shown Figure 3.1 for reference.

It is believed that all surface water from the building currently discharges directly to one of these public sewers without any form of attenuation, but it is not clear which one and it is therefore recommended that a CCTV survey of the existing site drainage network is undertaken to confirm the location and size of all existing connections from the site.

In addition, the River Irwell runs adjacent to the site, to the west. It might be possible that part / all the surface water from the site is currently discharged into the river with no attenuation, however, this will need to be confirmed via a CCTV survey.

The total site area is approximately 9,120m² of which approximately 8,495m² is currently hardstanding. In accordance with the Modified Rational Method, the peak existing run-off from the site is calculated from the formula:

$Q = 3.61 \times C_v \times A \times i$

where C_v is the volumetric runoff coefficient, A is the catchment area in hectares and i is the peak rainfall intensity in mm/hr.

For the peak 1-in-1-year return period storm event this gives an existing discharge rate from the site of:

$Q_1 = 3.61 \times 0.75 \times 0.8495 \times 31.2 = \mathbf{71.7 \text{ litres/sec}}$

and for the peak 1-in-100-year return period storm event this gives an existing discharge rate from the site of:

$Q_{100} = 3.61 \times 0.75 \times 0.8495 \times 82.6 = \mathbf{190.0 \text{ litres/sec}}$

3.2 Proposed site

The proposed development drawings suggest that there will be a minimum of around 960m² of soft landscaping leaving an impermeable area of 8,160m². Again using the Modified Rational Method, the proposed (unattenuated) peak run-off from the site for the 1-in-1-year return period storm would be:

$Q_1 = 3.61 \times 0.75 \times 0.8160 \times 31.2 = \mathbf{68.9 \text{ litres/sec}}$

and for the peak 1-in-100-year return period storm event:

$Q_{100} = 3.61 \times 0.75 \times 0.8160 \times 82.6 = \mathbf{182.5 \text{ litres/sec}}$

The Environment Agency updated their guidance on climate change allowance in February 2016 to include an upper and lower allowance to be considered depending on the specific site characteristics. Figure 3.2 shows the revised figures based on various building life spans. Therefore, making an allowance for climate change of 40 % this would give an unattenuated design discharge of:

$Q_{1 (+40\%)} = \mathbf{96.5 \text{ litres/sec}}$ and $Q_{100 (+40\%)} = \mathbf{255.5 \text{ litres/sec}}$

In accordance with the Environment Agency’s guidelines, the Building Regulations and the Water Authority’s advice, the preferred means of surface water drainage for any new development is into a suitable soakaway or infiltration drainage system. Sustainable Urban Drainage Systems (SuDS) can reduce the impact of urbanisation on watercourse flows, ensure the protection and enhancement of water quality and encourage recharging of groundwater in a manner which mimics nature.

In addition to this, the National Planning Policy Framework requires that surface water arising from a developed site should, as far as is practicable, be managed in a sustainable manner to mimic surface water flows arising from the site prior to the proposed development, whilst reducing flood risk to the site itself and elsewhere, taking climate change into account.

Therefore, as an absolute minimum, the proposed site discharge under the 1-in-100-year storm plus climate change should be no greater than the existing 1-in-100-year storm discharge (i.e. mitigate the impact of climate change and any increase in the area of hardstanding). In this case, this would mean that, rather

than discharging 255.5 litres/sec, the maximum permissible discharge from the site would be 182.5 litres/sec.

Further to the above, the CIRIA SuDS Manual state that previously developed sites should reduce the site runoff to the greenfield rates wherever possible.

In accordance with the method outlined in the Institute of Hydrology Report 124, the Greenfield runoff for the site is calculated from the formula:

$Q_{BAR} = 0.00108 \times AREA^{0.89} \times SAAR^{1.17} \times SOIL^{2.17}$

where AREA is the site area in km² (pro rata of 50 ha if the site is less than 50 ha), SAAR is the Standard Average Annual Rainfall in mm and SOIL is the Soil Index both read from The Wallingford Procedure maps. This gives a greenfield runoff for the site of:

$Q_{BAR} = 0.00108 \times 0.5^{0.89} \times 889^{1.17} \times 0.45^{2.17} = \mathbf{290.5 \text{ litres/sec}}$
(for 50 ha)

Scaling this for the actual site area gives:

$Q_{BAR} = (290.5 \times 0.9120) \div 50 = \mathbf{5.3 \text{ litres/sec}}$

Using the Hydrological Growth Curve for north-west England, the growth factor from Q_{BAR} to Q₁₀₀ is 2.079 which gives a value for **Q₁₀₀ = 11.02 litres/sec.**

Based on previous experience, it is likely that the local authority (MCC) will require the site to restrict the discharge to **5.3 litres/sec**. The local authority might accept the site to discharge into the River Irwell at unrestricted rate if this is confirmed acceptable by the Manchester Ship Canal Company Limited (MSCCL) and a surface water discharge agreement is in place with them.

We are currently liaising with MSCCL who have confirmed that discharging at unrestricted rate into the river Irwell could be possible subject to this discharge being documented within a licence agreement.

At the moment of writing this report a licence agreement is not in place with MSCCL, therefore it is assumed that the site will be required to restrict the discharge rate to **5.3 litres/sec** and SuDS options for the development are discussed in the next section.

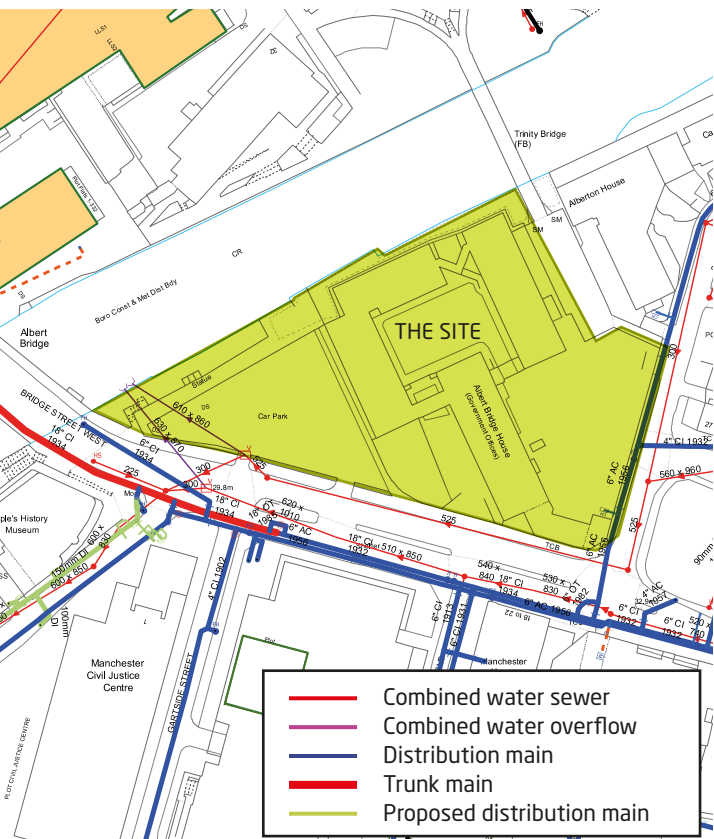


Figure 3.1 United Utilities Sewer Record

Range	Total potential change anticipated for 2010-2039	Total potential change anticipated for 2040-2059	Total potential change anticipated for 2060-2115
Upper end	10 %	20 %	40 %
Central	5 %	10 %	20 %

Figure 3.2 Peak rainfall intensity allowance

3.3 Disposal methods

SuDS management train

A useful concept used in the development of sustainable drainage systems is the SuDS management train (sometimes referred to as the treatment train). Just as in a natural catchment, drainage techniques can be used in series to change flow and quality characteristics of the runoff in stages. There are a variety of measures that can be implemented to achieve these goals:

Site management / Prevention

Site management procedures are used to limit or prevent runoff and pollution and include:

- Minimising the hardened areas within the site
- Frequent maintenance of impermeable surfaces
- Minimising the use of de-icing products

Source control

Source control techniques will be used where possible as they control runoff at source in smaller catchments. They can also provide effective pollution control and treatment, thereby improving the quality of the effluent discharged to the receiving waters.

Site control

Where source control techniques do not provide adequate protection to the receiving watercourses in terms of flood protection and pollution control, site control may be required.

Regional control

Where large areas of public space are available regional control can be incorporated to provide additional 'communal' storage and treatment to runoff from a number of sites. However, in this case, all storage and treatment will be implemented on site.

Drainage hierarchy

Based on the above and in line with the Sustainable Drainage Manual published by CIRIA, the following drainage hierarchy will therefore need to be considered when preparing the surface water disposal strategy:

1. Rainwater use as a resource (for example rainwater harvesting, blue roofs for irrigation)
2. Rainwater infiltration to ground at or close to source
3. Rainwater attenuation in green infrastructure features for gradual release (for example green roofs, rain gardens)
4. Rainwater discharge direct to a watercourse (unless not appropriate)
5. Controlled rainwater discharge to a surface water sewer or drain
6. Controlled rainwater discharge to a combined sewer

Assessment of SuDS techniques

Rainwater harvesting

This involves the capture of rainwater into a tank for re-use (usually non-potable) such as irrigation, toilet flushing or vehicle cleaning. Systems are now available which combine rainwater harvesting with tanked attenuation. This means that water is stored during dry periods for re-use but released ahead of predicted storms in order to ensure that the full attenuation capacity remains available when it is needed.

A RWH system is proposed for the commercial building. Please refer the MEP Engineer report for details.

Green / brown / blue roofs

These are used on flat or shallow pitched roofs to provide a durable roof covering which also provides thermal insulation, amenity space, biodiversity habitat as well as attenuation of rainwater. Depending on the design, these roofs can attenuate differing volumes of rainwater. The term 'blue roof' is reserved for those roofs designed to maximise water retention. This is a relatively recent area of increased focus and can involve effectively an attenuation tank at roof level which reduces (or avoids) the need for pumping of basement tanks.

This technique would provide attenuation and water treatment during smaller storm events although during large storm events the impact will be negligible and would have minimal effect on the attenuation tank.

The Architect has confirmed that blue roof systems having a total catchment area of approx. 1,250 m² is proposed for the commercial building. In addition, a 150mm deep permavoid layer is proposed above basement podium to attenuate surface water from external hardstanding and residential building. The blue roofs design lies within the scope of the MEP Engineer and blue roof manufacturers.

Raingardens

Raingardens are planted areas (usually close to buildings but not immediately adjacent) that allow the diversion of a portion of rainwater from either downpipes or the surrounding paved surfaces. These techniques can be incorporated into the landscaping plans for a site and are most effective where the landscaping regime is designed with the aim of capturing as much rainfall as possible. They can either allow infiltration into the ground or have tanked systems for water retention, depending on the site and soil conditions. There are also a number of vertical raingardens attached to building walls with rainwater downpipes diverted through a stacked series of planters.

As areas of soft landscaping are proposed for the development, there might be an opportunity to incorporate raingardens features into the scheme. This will need to be further investigated at the next design stages.

Bio-retention

This refers to a chain of landscaped features, potentially including reed beds, filter drains, etc. designed to hold and treat surface water. They are often used where there is a high risk of low-level pollution, for example from road run-off. However, it does require areas of open space. The design of a bio-retention system can vary widely depending on site conditions and available space. At a small scale this could include flow through planters or tree pits.

As the site is heavily developed and the basement footprint occupies the majority of the site area it does not seem feasible to provide bio-retention systems within the landscape.

Permeable surfacing

Permeable hard surfaces which work in much the same way as traditional impermeable surfaces apart from the ability to allow rainwater to pass through. Permeable blocks are traditionally used but there are now a range of permeable asphalt and resin bound gravel pavings being used increasingly commonly. Permeable surfaces can either allow infiltration into the ground or have tanked systems for water retention, depending on the site and soil conditions. They are suitable in even the most densely built-up development. However, they're not well suited to roads carrying heavy or fast motor traffic.

As there are areas of paving proposed as part of the scheme it could be possible to implement permeable paving. However, as there is a proposed basement which covers a big portion of the site and the underlying soil porosity is believed to be low it might be a tanked system for water retention and conveyance only rather than disposal. This will be confirmed by the findings of the Soil Investigation.

Swales

These are dry ditches used as landscape features to allow the storage, carriage and infiltration of rainwater and are often used as linear features alongside roads, footpaths or rail lines. They can also be integrated into the design of many open spaces.

As areas of soft and hard landscaping are proposed for the development, there might be an opportunity to incorporate swales for conveyance into the scheme. This will need to be further investigated at the next design stages.

Detention basin / ponds

Landscape features designed to store and in some cases infiltrate rainwater. Detention basins are usually dry, whereas a pond should retain water. These features need areas of open space but can often be combined with other sustainable drainage techniques.

As the site is heavily developed and the basement footprint occupies the majority of the site area there is insufficient space to provide a basin or pond.

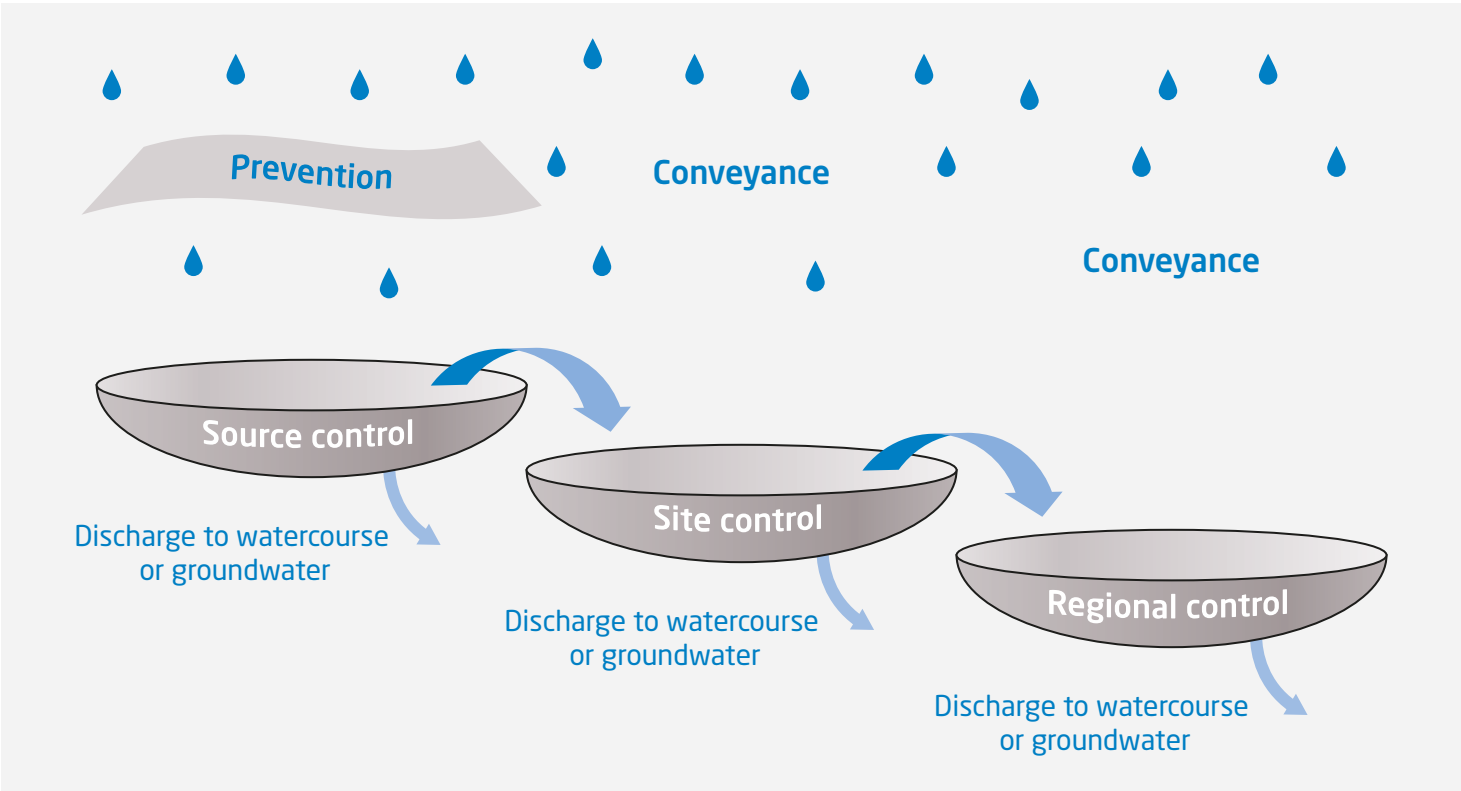


Figure 3.3 SuDS management train

Infiltration systems

Geological maps from the British Geological Society (Figure 3.4) suggest the underlying bedrock to be Chester Pebble Beds Formation Sandstone. Sandstone is generally classified as having low permeability (hydraulic conductivity (K) ranging between 10⁻¹⁰ - 10⁻⁶ m/s). Therefore, infiltration techniques are not proposed for the site. Geological maps are included in Appendix E for reference.

Discharge to tidal river / dock / canals

Discharging clean rainwater directly to tidal rivers, canals or docks isn't normally a sustainable drainage technique. Other more productive techniques should be used first. However, it is generally more sustainable than discharging to the combined or surface drainage systems. Residual surface water can be discharged to tidal / large waterbodies, in some cases with no limitation on volumes. Some storage may be required to allow for outfalls becoming tide locked. Care is needed to prevent scour in the receiving waterbody and potentially to prevent pollution. Consent from the Environment Agency, the asset owner and where applicable the Canal and River Trust is required.

The River Irwell runs adjacent to the site, to the north-west. Discharging into the River Irwell could be possible subject to the discharge being documented within a licence agreement with the MSCCL, to be confirmed at the next design stages.

Storage tanks / geocellular storage

Storage tanks are single GRP units usually located (but not necessarily) below ground level which attenuate rainwater for later slow release back into the drainage system but do not provide the wider benefits of green infrastructure sustainable drainage. They can also have the disadvantage that pumping may be required to empty the tank into the drainage system - especially if the tank is located at or below basement level. Where tanks are designed for large storm events, care is needed to ensure that they still perform a useful sustainable drainage function for low order storms.

Geocellular storage tanks are similar to storage tanks except that the volume is made up from multiple units rather than a single tank meaning they can be more flexible in terms of shape to suit constrained sites.

The table below presents the approximate storage volumes required for a range of discharge rates under the 1-in-100-year (plus 40% climate change) storm event:

Discharge condition	Discharge rate	Storage volume required
Mitigate climate change only (Absolute minimum)	190.0 litres / sec	90 m³
50% reduction on existing	95.0 litres / sec	160 m³
Pre-development 1-year peak flow rate	71.7 litres / sec	190 m³
Greenfield (Environment Agency's preferred rate)	5.3 litres / sec	510 m³

A storage volume of 510 m³ (Greenfield rate) has been allowed for the development to restrict the discharge rate to 5.3 litres/sec as we believe that United Utilities and Manchester City Council will require the site to discharge at the Greenfield Run-off rate.

The storage volume will be provided via a combination of attenuation tanks (237 m³), permavoid (195 m³) and bluerroof systems (78 m³).

The attenuation tank should be located at a high enough level to allow a connection to be made to the public sewer by gravity. Locating the tank below this level would result in a pumped surface water system which is both unsustainable and uneconomic. A CCTV survey will be required to confirm invert level of existing outfalls from the site, this will provide the level above which the attenuation tank should be located.

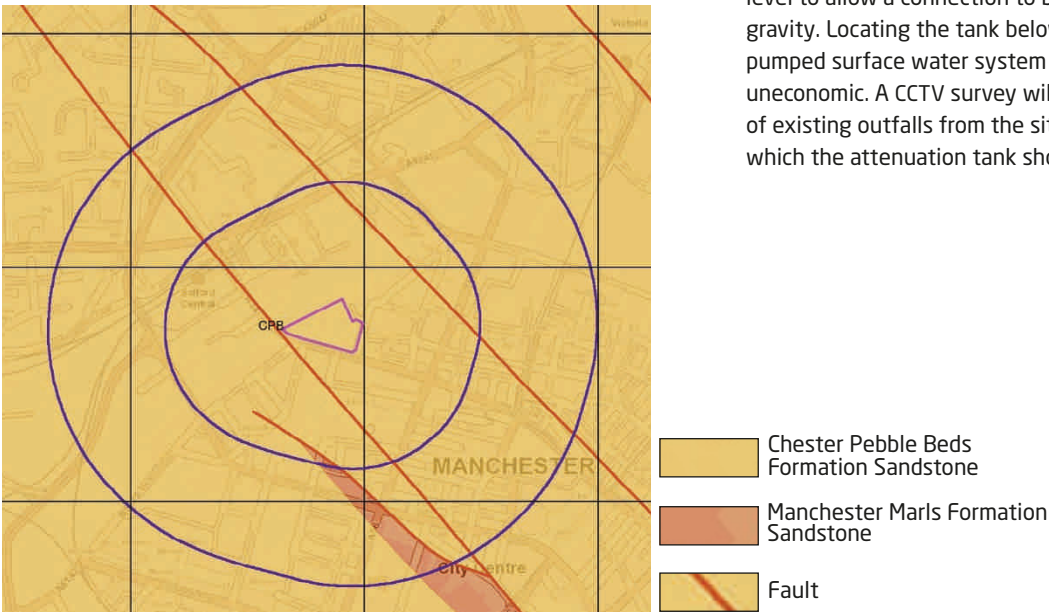


Figure 3.4 Bedrock Geology

Oversized piping

Using larger than necessary pipework creates more room to store rainwater. Potentially more sustainable than storage tanks / geocellular storage if the pipes drain by gravity and do not require pumping. However, lacks the wider benefits of the green infrastructure-based techniques.

As the attenuation storage has been sized to accommodate the 1-in-100 year plus climate change event there is no need for oversized piping.

Design for exceedance

This involves designing areas within a site such that they will flood and hold water during rare storm events (typically a frequency of once in ten years or longer).

As the attenuation storage has been sized to accommodate the 1-in-100 year plus climate change event there is no need to design for exceedance.

Summary of the Proposed SuDS Strategy

Green / blue roof systems having a total plan area of approx. 1,250 m² are proposed at roof level, for the commercial building. In addition, a 3,120m² permavoid system is proposed above basement podium. Extent of green/blue roof systems and permavoid to be confirmed at the next stages of the design.

A below ground attenuation tank of approx. 237m³ is proposed to the south of the commercial building.

The outfall from the site will connect to the existing public sewer either with a new connection or, preferably, by reusing one of the existing connections. Based on the existing utility survey, there is a 225mm dia. and a 100mm dia. existing foul water outfall connection into the 525mm dia. combined sewer under Bridge St. It is proposed to reuse the 225mm dia. connection to discharge surface water from the site into the 525mm dia. public sewer subject to levels, condition and size to be confirmed by a CCTV survey.

Once the CCTV and level survey of the existing network has been undertaken the location and layout of the outfall(s) can be determined but due to the depth of the existing public combined sewers it is recommended that, if possible, the existing drainage connection(s) should be reused to prevent the need for constructing a new, deep connection. This would minimise both the cost of the work and the disruption to the surrounding roads which are busy thoroughfares and consequently require significant traffic management to be provided during the work.

A schematic SuDS layout is contained in Appendix B for reference.

Alternatively, it may be possible to discharge at unrestricted rate into the River Irwell subject to a licence agreement with the MSCCL and this will be confirmed at the next design stages.

Element	Management stage	Water quantity	Water quality	Amenity & biodiversity	Potential in scheme
Rainwater harvesting	Prevention	✓	✗	✗	✓
Green / brown / blue roof	Source control	✓	✓	✓	✓
Raingardens	Source control	✓	✓	✓	? / ✓
Bio-retention	Source control	✓	✓	✓	✗
Permeable surfacing	Source control	✓	✓	✗	? / ✓
Swales	Source control	✓	✓	✓	? / ✓
Detention basin / ponds	Source control	✓	✓	✓	✗
Discharge to tidal river / dock / canals	Site control	✓	✗	✗	? / ✓
Storage tanks / Geocellular storage	Site control	✓	✗	✗	✓
Oversized piping	Site control	✓	✗	✗	✗
Design for exceedance	Site control	✓	✗	✗	✗

Figure 3.5 Summary of potential SuDS devices

akt II

In addition, the site lies within a Critical Drainage Area (CDA) identified as Conurbation Core.

In addition, the site lies within a Critical Drainage Area (CDA) identified as Conurbation Core.

- In accordance with the NPPF, the proposed amenity open space land use is suitable in flood zone 3b, land use of office space is suitable within Flood Zone 3a and land for residential use is suitable within Flood Zone 1. The land uses of the proposed development are suitable for the site's location under the terms of the Sequential Test and are considered appropriate to the location.

- In accordance with the NPPF, the proposed amenity open space land use is suitable in flood zone 3b, land use of office space is suitable within Flood Zone 3a and land for residential use is suitable within Flood Zone 1. The land uses of the proposed development are suitable for the site's location under the terms of the Sequential Test and are considered appropriate to the location.

- The site has a **low probability of flooding** from groundwater provided that the recommendations included in this report are implemented.

- The site has a **low probability of flooding** from artificial sources as it is situated at a considerable distance away from artificial water features.

- The site has a **low probability of flooding** from sewers and the local drainage network, as long as they continue to be adequately maintained and non-return valves are included at the proposed outfall drainage points of the scheme.

- The site has been assessed as being at **low risk from surface water flooding** provided that the recommendations included in this report are implemented.

- The site does not currently cause flooding to adjacent sites and SUDs measure are proposed, therefore, the risk to adjacent properties will be reduced. A sustainable drainage system is to be specified to reduce the peak surface water discharge from the proposed development. In order to reduce the risk of flooding from sewer to the site and other properties downstream and in order to comply with legislative requirements the existing surface water discharge should be reduced as described in Section 3.2.

- The proposed development has an acceptable flood risk within the terms and requirements of National Planning Policy Framework.

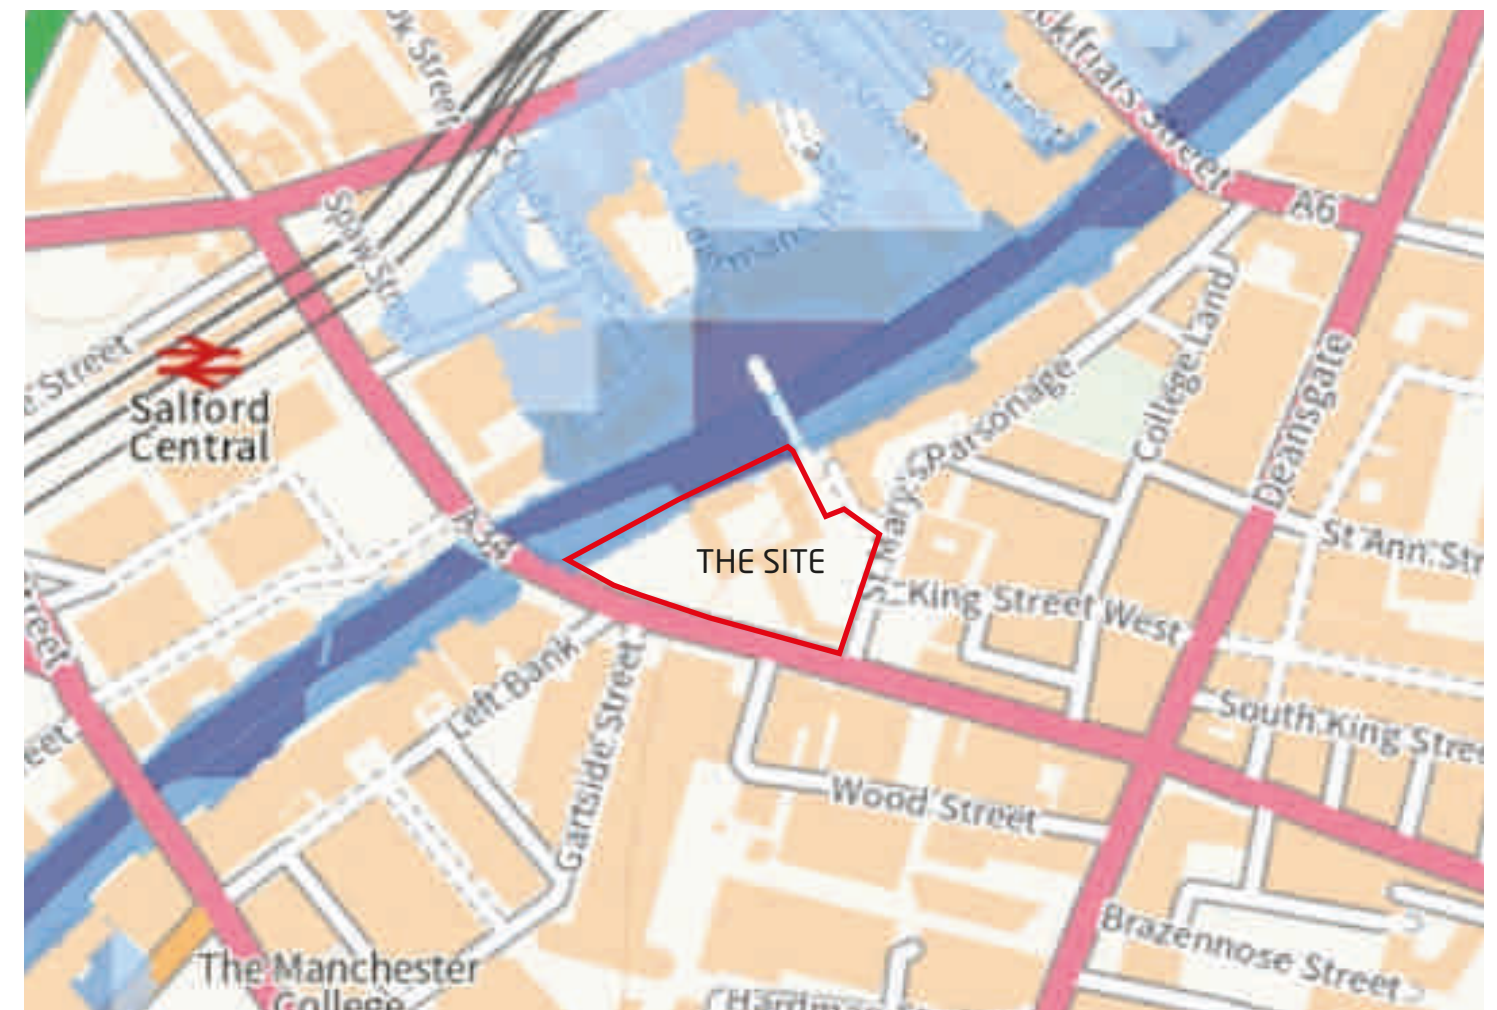
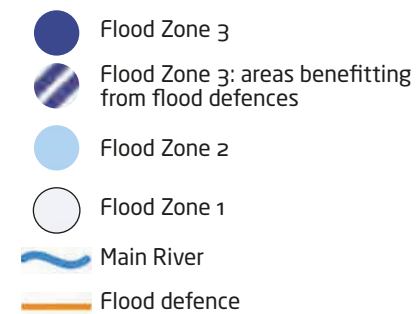


Figure 4.1 Environment Agency indicative flood map

5 Foul water drainage

5.1 Existing scheme

The available Thames Water record plans indicate that there are:

- A 300mm dia. combined sewer running from north to south under St. Mary’s Parsonage, to the east of the site. This then increases to 525mm dia. and continues towards west under Bridge St. to the south of the site.
- A 300mm dia. combined sewer running under Bridge St. to the south-west of the site.
- A 530x830mm combined water sewer running from the south-east to the south-west under Bridge St., to the south of the site. This increases to 510x850mm and successively to 620x1010mm.
- A 610 x 860mm combined water overflow running within the site, to the south-west. We assume that this overflow would take the excess water from the 525mm combined water sewer and discharges it into the River Irwell in extreme rainfall or emergency surcharge events
- A 630 x 870mm combined water overflow crossing the site to the south-west. We assume that this overflow would take the excess water from the 620 x 1010mm combined water sewer under Bridge St. and discharges it into the River Irwell in extreme rainfall or emergency surcharge events.

An extract from the record plans is shown in Figure 3.1 for reference.

Based on the existing utility survey, there is a 225mm dia. and a 100mm dia. existing foul water outfall connections into the 525mm dia. combined sewer under Bridge St.

It is believed that all foul water from the buildings currently discharges directly to the 525mm dia. combined sewer under Bridge St via the two existing outfalls. However, it is recommended that a CCTV survey of the existing site drainage network is undertaken to confirm the location, size and condition of all existing connections from the site to confirm their suitability for reuse.

Although some floor plans are available for the existing buildings, foul appliances such as sinks and toilets are indicated only for one of the existing buildings (the 18th floor building) and these have been used for estimate the existing foul flow.

Using the guidelines for commercial developments given in BS EN 12056-2:2000 - “Gravity Drainage Systems Inside Buildings - Part 2: Sanitary Pipework, layout and calculation”, the proposed foul flow is calculated from the formula:

$Q = K \times \sqrt{DU}$

For ‘intermittent use’ (representing dwellings, offices, etc.) K has a value of 0.5 giving:

Appliance	No.	Discharge units per appliance	Total number of discharge units
Wash hand basin	104	0.5	52.0
Shower	1	0.6	0.6
Kitchen sinks	34	0.8	27.2
WC	53	2.0	106.0
Dishwasher	36	0.8	28.8
Urinals	30	0.5	15.0
Floor drains	2	2.0	4.0
Total discharge units for site =			233.6
Therefore, total flow from site =			7.6 litres / sec

In addition, 5.0 litres/sec are assumed for the plant rooms at basement levels. Therefore, a total foul flow of 12.6 litres/sec has been estimated for the existing site.

5.2 Proposed scheme

The latest architectural layouts have been used to estimate the number of foul appliances in the proposed commercial and residential building. Using the guidelines for commercial developments given in BS EN 12056-2:2000 - “Gravity Drainage Systems Inside Buildings - Part 2: Sanitary Pipework, layout and calculation”, the proposed foul flow is calculated from the formula:

$Q = K \times \sqrt{DU}$

For ‘intermittent use’ (representing dwellings, offices, etc.) K has a value of 0.5 giving for the commercial building:

Appliance	No.	Discharge units per appliance	Total number of discharge units
Wash hand basin	224	0.5	112.0
Kitchen sinks	56	0.8	44.8
WC	224	2	448.0
Dishwasher	56	0.8	44.8
Floor drains	5	2.0	10.0
Total discharge units for site =			659.6
Therefore, total flow from site =			12.8 litres / sec

In addition, a flow of 5.0 litres/sec is assumed from the plant room at basement level.

For ‘intermittent use’ (representing dwellings, offices, etc.) K has a value of 0.5 giving for the residential building:

Appliance	No.	Discharge units per appliance	Total number of discharge units
Wash hand basin	506	0.5	253.0
Shower	175	0.6	105.5
Kitchen sinks	393	0.8	314.4
WC	504	2.0	1008.0
Dishwasher	393	0.8	314.4
Floor drains	5	2.0	10.0
Bath	353	0.8	282.4
Washing machine	393	0.8	314.4
Total discharge units for site =			2602.1
Therefore, total flow from site =			25.5 litres / sec

In addition, a flow of 5.0 litres/sec is assumed from the plant room at basement level.

The MEP engineer have provided the below peak foul flow rates for the buildings:

Building	DU	Peak discharge rate	Additional flow allowance
Commercial	499	11.2 litres/sec	7.0 litres/sec
Residential	2844	26.6 litres/sec	2.0 litres/sec

At this early design stage it is suggested that an allowance is made for **17.8 litres / sec** for the commercial building and **30.5 litres/sec** for the residential building to accommodate any design development until more accurate figures are available. This will equate to a total foul water flow of 48.3 litres/sec.

Based on the above, the proposed foul flow rates from the site will be higher than the existing. A Pre-planning enquiry has been submitted to United Utilities to confirm capacity within their sewer network. United Utilities have confirmed that their sewage infrastructure has sufficient capacity to accommodate the proposed development. Refer to Appendix C for their response.

It is assumed that any foul water drainage from ground floor level and above will be drained by gravity in order to minimise the amount of pumping required. Until the levels of the existing connections and public sewers are confirmed it is unclear whether the basement level will need to be pumped although this appears to be likely. It is therefore recommended that an allowance is made at this stage for pumping foul water from below the basement level slab up to high level in the basement to allow it to discharge by gravity to the public sewer.

As with the surface water drainage, due to the depth of the public sewers it is recommended that, if possible, the existing drainage connection(s) should be reused. Refer to Appendix B for the proposed connections to the public sewers and discharge rates per connections.

6 Overflow pipe diversion

There are 2 United Utilities combined overflow pipes crossing the site to the west:

- A 610 x 860mm combined water overflow running within the site, to the south-west. We assume that this overflow would take the excess water from the 525mm combined water sewer and discharges it into the River Irwell in extreme rainfall or emergency surcharge events
- A 630 x 870mm combined water overflow crossing the site to the south-west. We assume that this overflow would take the excess water from the 620 x 1010mm combined water sewer under Bridge St. and discharges it into the River Irwell in extreme rainfall or emergency surcharge events.

See to Figure 6.1 for reference.

The proposed basement clashes with the United Utilities 610 x 860mm combined water overflow pipe and its upstream manhole MH.1 - please refer to Appendix D (an extract is shown in Figure 6.2).

To avoid the clash between the proposed basement and the United Utilities asset it may be proposed to divert the 610 x 860mm combined water overflow pipe, the 525mm combined water sewer and MH1 as shown in Appendix D (an extract is shown in Figure 6.3). This is subject to further development.

A formal S185 Sewer Diversion Application has been submitted to United Utilities who confirmed that the diversion proposal appears to be feasible. However, United Utilities will need to further assess our design and a formal approval will be required.

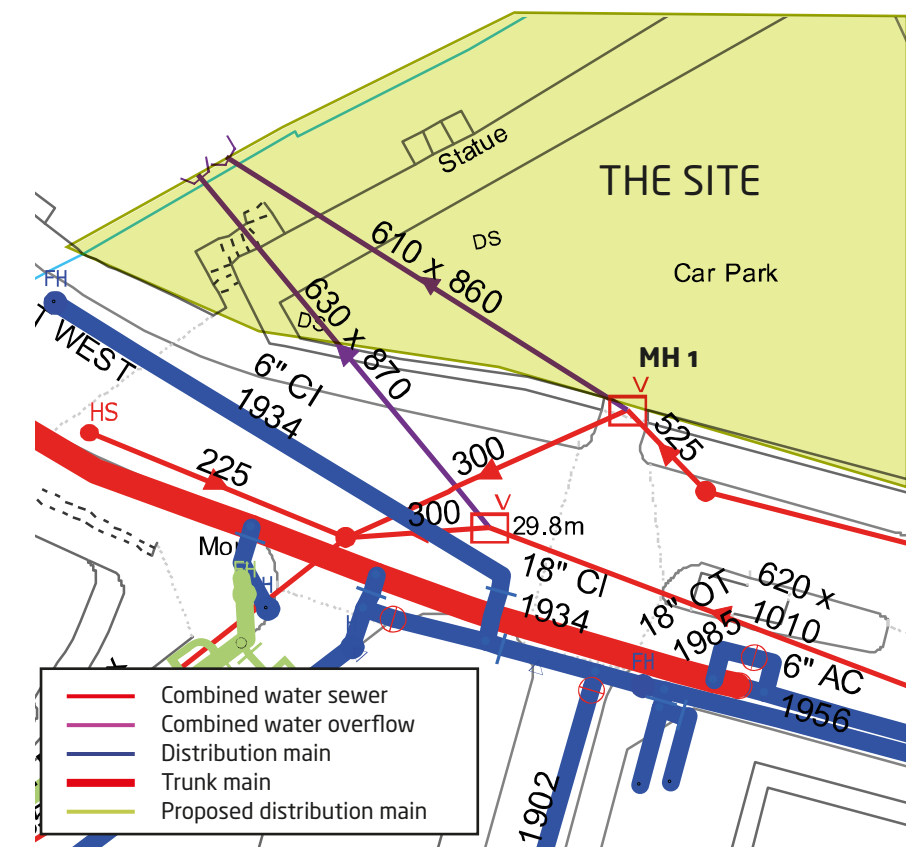


Figure 6.1 United Utilities Asset Map / combined overflow pipes

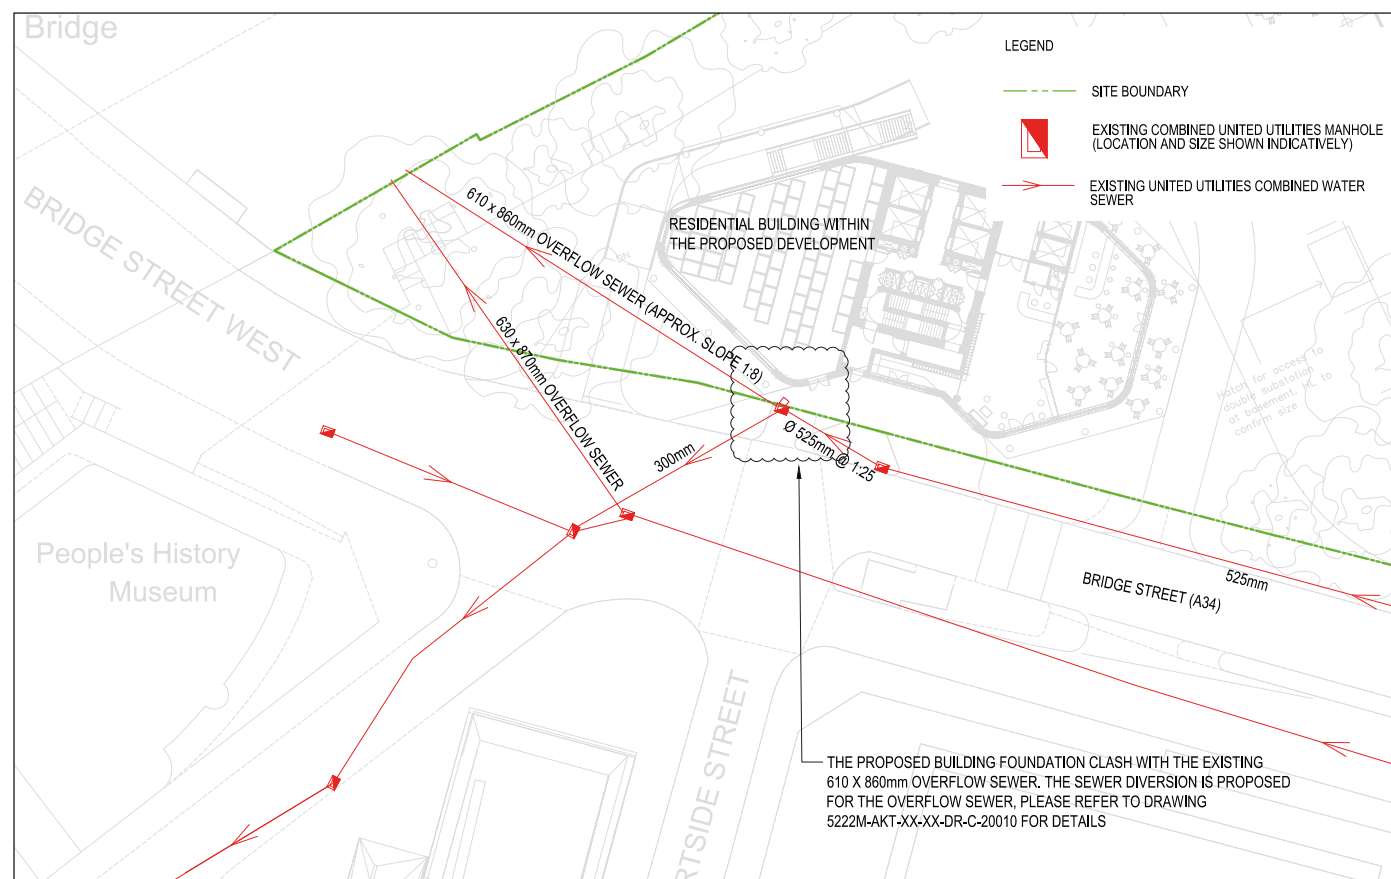


Figure 6.2 Clashes between basement and United Utilities Asset Map

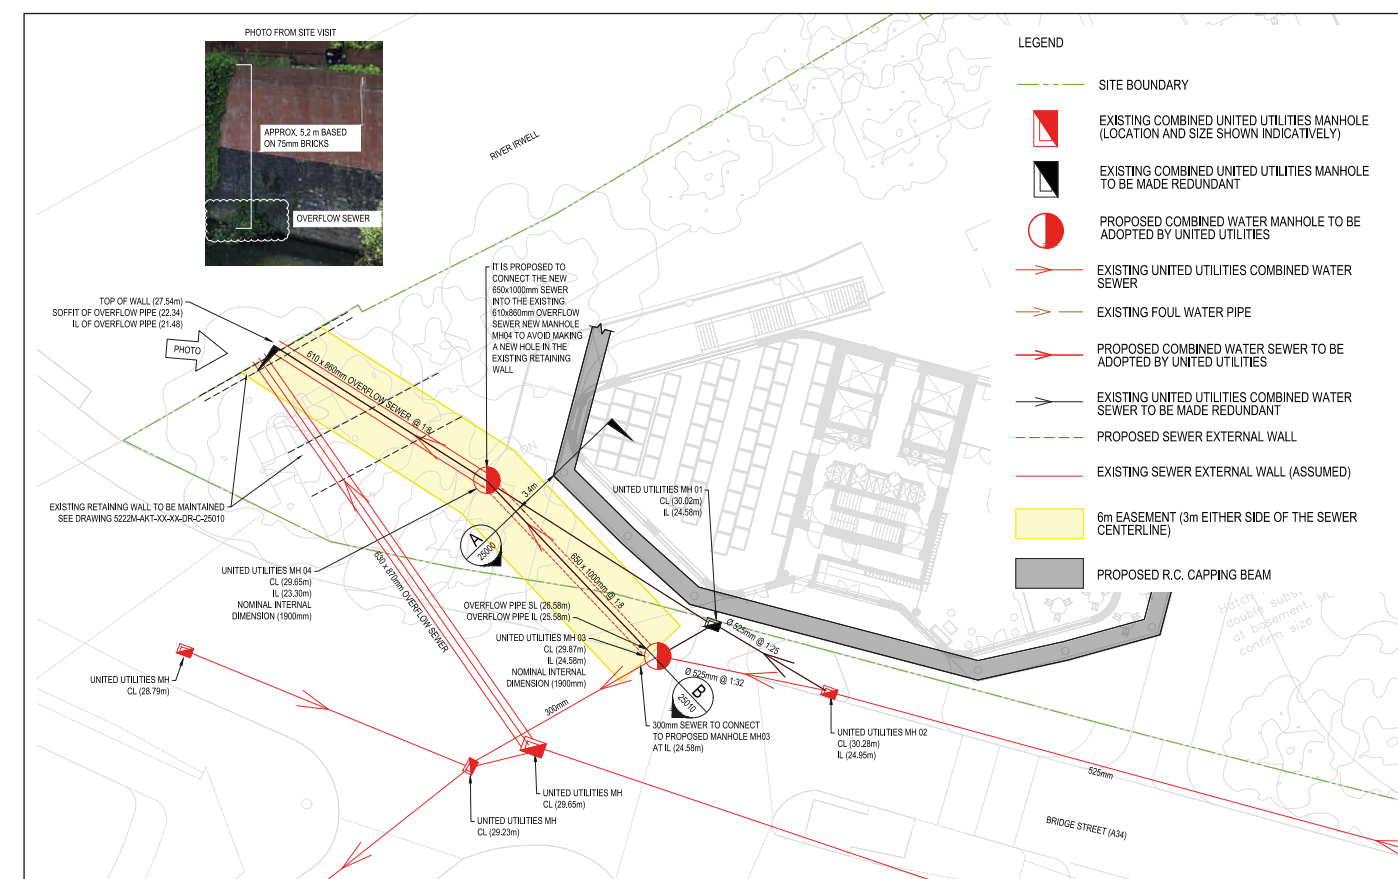


Figure 6.3 Proposed combined water overflow diversion

7 BREEAM

Pol 03: Flood and surface water management

Prerequisite

1. An appropriate consultant is appointed to carry out and demonstrate the development's compliance with all criteria.

Up to two credits – Flood resilience

Two credits – Low flood risk

2. A site specific flood risk assessment (FRA) confirms the development is in a flood zone that is defined as having a low annual probability of flooding. The FRA takes all current and future sources of flooding into consideration.

One credit – Medium or high flood risk

3. A site specific FRA confirms the development is in a flood zone that is defined as having a medium or high annual probability of flooding and is not in a functional floodplain. The FRA must take all current and future sources of flooding into consideration.
4. To increase the resilience and resistance of the development to flooding, one of the following must be achieved:
 - a. The ground level of the building and access to both the building and the site, are designed (or zoned) so they are at least 600 mm above the design flood level of the site's flood zone; **OR**
 - b. The final design of the building and the wider site reflects the recommendations made by an appropriate consultant in accordance with the hierarchy approach outlined in Section 5 of BS 8533:2017.

Two credits – Surface water run-off

Prerequisite for surface water run-off credits

5. Surface water run-off design solutions must be bespoke, i.e. they must take account of the specific site requirements and natural or man-made environment of and surrounding the site. The priority levels detailed in the Methodology must be followed, with justification given by the appropriate consultant where water is allowed to leave the site.

One credit – Surface Water Run-Off – Rate

6. For brownfield site, drainage measures are specified so that the peak rate of run-off from the site to the watercourses (natural or municipal) shows a 30 % improvement for the developed site compared with the pre-developed site. This should comply at the 1-year and 100-year return period events.
7. For greenfield site, drainage measures are specified so that the peak rate of run-off from the site to the watercourses (natural or municipal) is no greater for the developed site than it was for the pre-development site. This should comply at the 1-year and 100-year return period events.
8. Relevant maintenance agreements for the ownership, long term operation and maintenance of all specified Sustainable Drainage Systems (SuDS) are in place.
9. Calculations include an allowance for climate change. This should be made in accordance with current best practice planning guidance.

One Credit – Surface Water Run-Off – Volume

10. Flooding of property will not occur in the event of local drainage system failure (caused either by extreme rainfall or a lack of maintenance); **AND EITHER**
11. Drainage design measures are specified so that the post-development run-off volume, over the development lifetime, is no greater than it would have been prior to the assessed site's development. This must be for the 100-year 6-hour event, including an allowance for climate change.
12. Any additional predicted volume of run-off for this event is prevented from leaving the site by using infiltration or other SuDS techniques.

OR (only where Criteria 10 & 11 cannot be achieved)

13. Justification from the appropriate consultant indicating why the above criteria cannot be achieved, i.e. where infiltration or other SuDS techniques are not technically viable options.
14. Drainage design measures are specified so that the post-development peak rate of run-off is reduced to the limiting discharge. The limiting discharge is defined as the highest flow rate from the following options:
 - a. The pre-development one-year peak flow rate **OR**
 - b. The mean annual flow rate Q_{BAR} **OR**
 - c. 2 litres/sec/ha

For the one-year peak flow rate, the one year return period event criterion applies.

15. Relevant maintenance agreements for the ownership, long-term operation and maintenance of all specified SuDS are in place.

16. For either option, above calculations must include an allowance for climate change; this should be made in accordance with current best practice planning guidance.

One credit – Minimising watercourse pollution

One credit

17. There is no discharge from the developed site for rainfall up to 5 mm (confirmed by the appropriate consultant).
18. Areas with a low risk source of watercourse pollution, an appropriate level of pollution prevention treatment is provided, using appropriate SuDS techniques.
19. Areas with a high risk of contamination or spillage of substances, such as petrol and oil, have separators (or an equivalent system) installed in surface water drainage systems.
20. Chemical or liquid gas storage areas have a means of containment fitted to the site drainage system (i.e. shutoff valves). This is to prevent the escape of chemicals to natural watercourses in the event of a spillage or bunding failure.
21. All water pollution prevention systems have been designed and installed in accordance with the recommendations of documents such as the SuDS Manual and other relevant industry best practice. They must be bespoke solutions taking account of the specific site requirements and natural or man-made environment of and surrounding the site.
22. A comprehensive and up-to-date drainage plan of the site will be made available for the building or site occupiers.
23. Relevant maintenance agreements for the ownership, long term operation and maintenance of all specified SuDS must be in place.
24. All external storage and delivery areas designed and detailed in accordance with the current best practice planning guidance.

Up to two credits – Simple buildings – Surface water run-off

Two credits

For "simple buildings", the criteria below should be applied to award one or two credits. Alternatively, two credits and an Exemplary credit is awarded where criteria 5-15 are achieved.

25. Either 24a below or 24b below is met:
 - a. There is a decrease in the impermeable area by 50 % or more, from the pre-existing impermeable hard surfaces; **OR**
 - b. All run-off from the roof, including new and existing parts of the building, has been managed on site using source control methods. This must be achieved for rainfall depths up to 5 mm.

One credit – Simple buildings – Surface water run-off

26. Either 25a below or 25b below is met:
 - a. There is no increase in the impermeable surfaces as a result of the new construction; **OR**
 - b. If there is an increase in the impermeable surface as a result of the new construction then the following must be met:
 - i. Hard standing areas: additional (or equivalent area of) hardstanding must be permeable or be provided with on-site SuDS to allow full infiltration of the additional volume. The permeable hardstanding must include all pavements and public rights of way, car parks, driveways and non-adoptable roads. Small garden paths which will drain onto a naturally permeable surface can be excluded.
 - ii Building (new-build or extension): for an increase in building footprint, extending onto any previously permeable surfaces, the additional run-off caused by the area of the new construction must be managed on site using an appropriate SuDS technique for rainfall depths up to 5 mm.

Assessment of available credits

Prerequisite

Criterion	AKT II assessment	
1.	AKT II are appropriate consultants with the relevant qualifications and experience to design SuDS and flood prevention measures and completing peak rate of run-off calculations.	✓

Flood resilience

Criterion	AKT II assessment	
2.	The majority of the site is situated in Flood Zone 1. The riverbank is situated in flood zone 3.	✓
3.	A site-specific Flood Risk Assessment has been carried out which confirms that the development is at low risk from all flooding sources	✓
4a.	Not applicable – the site is located in Flood Zone 1.	N/A
4b.	The design of the building and the wider site is in accordance with the flood risk assessment and the hierarchical approach outlined in the relevant standards.	✓

Based on this we believe that potentially two credit out of a possible two can be awarded under these criteria.

Surface water run-off

Run-off criteria	AKT II assessment	
5.	The drainage strategy has been prepared in line with the NPPF, National non-statutory SuDS standards and the Sustainable Drainage Manual produced by CIRIA and the priority levels detailed in the BREEAM Methodology.	✓
6.	The proposed peak run-off rate has been reduced to greenfield rate which represents a 92% reduction on the pre-developed site for a 1-in-1 year storm event and a 97% reduction for a 1-in-100 year storm event.	✓
7.	Not applicable- the site is not a greenfield site	N/A
8.	The ownership, operation and maintenance requirements for each SuDS device will be written into the O&M Manual for the site.	✓
9.	An allowance of 40% has been made for climate change in all calculations in line with the Environment Agency’s guidance.	✓
10.	The site-specific FRA carried out by AKT II confirms that the site is at low risk of flooding from local drainage system failure.	✓
11.	As the post development hard standing area is less than the pre development hard standing area then there cannot be any more run-off volume over the lifetime of the building.	✓
12.	The site investigation will confirm whether infiltration techniques are a viable solution. It is currently not believed to be possible to use infiltration due to the underlying soil condition and the extent of the proposed basement.	✗
13.	The site investigation will confirm whether infiltration techniques are a viable solution. It is currently not believed to be possible to use infiltration due to the underlying soil condition and the extent of the proposed basement.	✗
14.	Pre-development 1-year peak flow rate = 68.9 litres/sec Mean annual flow rate $Q_{bar} = 5.3$ litres/sec 2 litres/sec/ha = 1.8 litres/sec It is proposed to reduce the proposed peak discharge rate to Q_{bar} .	✓
15.	The ownership, operation and maintenance requirements for each SuDS device will be written into the O&M Manual for the site.	✓
16.	An allowance of 40% has been made for climate change.	✓

Based on this we believe that potentially two credits out of a possible two can be awarded under these criteria.

Minimising watercourse pollution

Pollution criteria	AKT II assessment	
17.	As confirmed above, no infiltration is possible and there is insufficient green roof coverage therefore this criterion cannot be achieved.	✗
18.	SuDS devices will be specified where possible within the limitations of the development.	✓
19.	As there are no high risk areas being provided as part of the scheme and therefore no separators require to be provided.	N/A
20.	There are no chemical /liquid gas storage areas proposed as part of the scheme.	N/A
21.	All water pollution prevention and SuDS devices will be designed in accordance with the SuDS Manual.	✓
22.	An up-to-date drainage plan will be made available to the site occupiers upon completion.	✓
23.	The ownership, operation and maintenance requirements for each SuDS device will be written into the O & M Manual for the site.	✓
24.	There are no external storage or delivery areas proposed as part of the scheme.	N/A

Based on this we believe that no credit can be awarded under these criteria.

Overall, we believe that potentially four credits out of a possible five can be awarded under the Polo3 criteria outlined above.

8 Maintenance and operation

Before cleaning, final testing and immediately before handover the Contractor will:

- Lift covers to manholes, inspection chambers and access points. Remove mortar droppings, debris and loose wrappings.
- Thoroughly flush pipelines with water to remove silt and check for blockages. Rod pipelines between access points if there is any indication that they may be obstructed.
- Carry out a CCTV of the pipework to ensure that it is free of silt and blockages.

The End User shall then follow the “Waste Management, The Duty of Care – A Code of Practice (Revised 1996)” and shall ensure that their waste does not escape from their control and is transferred only to a registered waste carrier to be sent for recycling or disposal at a suitably licensed facility.

All waste arising from the maintenance of the drains and sewers shall be handled, stored and disposed of correctly to avoid pollution. Waste may be designated as hazardous / special waste and, as such, the End User shall ensure that they comply with the Hazardous Waste (England and Wales) Regulations 2005.

Reference shall be made to CIRIA publication C753 - The SuDS Manual by the Contractor and the End User. A suitable maintenance schedule must be developed, maintained, followed and updated as required to reflect observed performance. The following items are highlighted for guidance.

8.1 General drainage

The below ground drainage network will be designed in accordance with the requirements of the Building Regulations whilst acknowledging the need to limit the number of inspection chambers within “front of house” areas. To this end, all main runs will have rodding eyes, manholes or inspection chambers at the head of the run and at all changes of direction to provide access to rod or jet the main pipework.

Where possible, connections from stacks or gullies will be made directly to these manholes or inspection chambers to allow the connection to be rodded or jetted from the downstream end. Where this is not possible, each stack will be detailed to have an access hatch provided just above floor level (see Figure 8.1) to allow the connection to be rodded or jetted from the upstream end. Similarly, the gullies will have a rodding access provided within their body allowing the pipework to be rodded or jetted from the gully downstream.

Gullies and channels will be specified with silt buckets and silt trap manholes will be provided upstream of all tanks to prevent the ingress of silts into the drainage network and impairing the performance of the system.

Maintenance schedule	Required action	Recorded frequency
Regular maintenance	Inspect and identify areas that are not operating correctly. If required, take remedial action. Remove sediment from pre-treatment structures (e.g. gullies, channels, silt traps).	Monthly for the first three months then six-monthly Six-monthly or as required
Occasional maintenance	Debris removal from catchment surface where this may cause risks to performance.	Monthly
Remedial actions	Repair / rehabilitation of inlets, outlets, overflows and vents.	As required
Monitoring	Inspect all manholes, inspection chambers, inlets, outlets, overflows and vents to ensure they are in good condition and operating as designed.	Annually and after large storms

8.2 Pumped systems

Pumps will be designed as duplex units operating on a duty / standby based on hours run, pump failure and high / high water level. A suitable BMS interface shall be provided monitoring each pump system for the following status points:

- Pump 1 running / Pump 2 running - These statuses shall be provided to the BMS in the form of a volt free contact that is closed when the pump is running.
- Pump 1 failed / Pump 2 failed - These statuses shall be provided to the BMS in the form of a volt free contact that is closed when the pump has deemed to have failed, i.e. failed to run when requested. This shall cause a latched general alarm on the BMS.
- High water level - This status shall be provided to the BMS in the form of a volt free contact that is closed when a high water level is breached. The level shall set at a level that is higher than the normal pump control level switch. This shall cause a latched general alarm on the BMS.
- High / High water level - This status shall be provided to the BMS in the form of a volt free contact that is closed when a high / high water level is breached. The level shall set at a level that is higher than the high water level switch. This shall cause a critical latched alarm on the BMS.

- System not in automatic / not available - This status shall be provided to the BMS in the form of a volt free contact that is open (failsafe) when the system is not available to operate. This shall operate should any event occur that could prevent the system from operating, such as power loss to the control panel, hand / off / auto switches not in Auto, isolators opened. This shall cause a critical latched alarm on the BMS.

The BMS shall be capable of raising the following alarms:

- Excessive Pump Running Alarm - The BMS shall monitor the running status of each pump. Should any pump run for longer than 20 minutes, a general alarm shall be raised on the BMS.
- Excessive Pump Starts Alarm - The BMS shall calculate from the running status the number of starts per hour. Should the number of starts per hour exceed 4, a general alarm shall be raised on the BMS.

A control panel local to each pump station shall be provided to monitor the same status points and alarms as defined for the BMS Interface above.

8.3 Attenuation tanks

By aligning geocellular units end-to-end, full length viewing channels will be created within the base of the attenuation tank allowing for CCTV inspection if required. CCTV inspection of the tank is recommended at six-monthly intervals and after every major storm. Should the CCTV reveal a build-up of silt in the base of the tank these channels also allow for jetting of the tank structure to clear the system.

Silt traps prior to inlet pipework should be routinely inspected and cleaned out to minimise debris reaching the tank. It is important to prevent construction silt from entering the geocellular below ground tank structure.

8.4 Petrol separators

The separator shall be provided with a robust device to provide visual and audible warning to an appropriate location when the level of oil reaches 90 % of the oil storage volume under static liquid level conditions. Appropriate maintenance shall then be carried out.

Maintenance schedule	Required action	Recorded frequency
Regular maintenance	Follow the manufacturer’s recommended guidelines. Remove sediment / oil from separator. Service all electrical equipment. Inspect integrity of separator and all mechanical parts.	As manufacturer’s recommendations Six-monthly or as manufacturer’s recommendations As manufacturer’s recommendations Six-monthly or as manufacturer’s recommendations

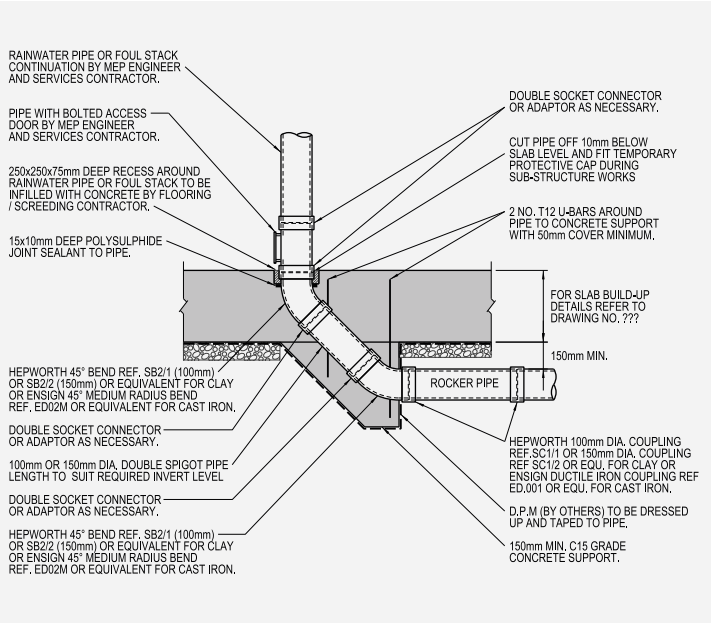


Figure 8.1 Rodding /jetting access detail

8.5 Blue / Green Roofs

Ensure safe access can be gained to the roof and that relevant Health and Safety procedures are followed when working at roof level. It is advised that the contractor should always seek proof of current maintenance for any roof access, fall arrest / restraint systems prior to proceeding with the work on site. The level of maintenance required is dependent on the final finish. Paved podium decks and extensive green roofs are relatively low maintenance whereas intensive green roofs require maintenance like any garden.

Remove all dead vegetation and debris from the roof and ensuring all outlets, gutters and downpipes are clear. Where the species mix incorporates wildflowers and grasses it is recommended that all dead vegetation is mown / strimmed down and the waste is removed from the roof and disposed off.

Any vegetation which has encroached into drainage outlets, walkways and the vegetation barriers (pebbles) should be removed. Weeding an extensive green roof is necessary to maintain a healthy roof and all aggressive species of shrub sapling and undesirable plants should be removed. Some weeds however are helpful to the biodiversity of the roof and considered as a problem only of aesthetics. If considered excessive, they can be removed ensuring that care is taken to follow specific instructions as to the type and species of vegetation removed. All extensive green roof installations will at times include some moss and grass.

Areas of dead vegetation / bare patches can be easily repaired and this is best done during the main growing seasons of March/ April or from late August until the end of September. Take plug plants (new) or vegetation cuttings from surrounding areas of healthy mature plants and place on bare patches, pressing gently into the soil. A light sprinkling of sand mixed with compost should then be dressed over the affected area and watered to improve the uptake of the cuttings. If the vegetation is showing signs of distress, but has received regular rainfall, then the most likely problem is a lack of nutrient and a fertiliser should be applied.

Remove the lids of all Inspection chambers, ensure that all rainwater outlets and downpipes are free from blockages and that water can flow freely away, clean filters to outlets twice yearly and replace every three years. Ensure that any protective metal flashings and termination bars remain securely fixed in place.

Examine all mastic sealant and mortar pointing for signs of degradation. Check that all promenade tiles and paving slabs are securely fixed to the roof surface and in good condition.

Advise the client of the need to repair or renew any defects as necessary.

Ensure that any new items of plant/equipment on the roof are mounted on suitable isolated slabs and that any fixings used to secure the plant/equipment in place do not penetrate the waterproofing. Report signs of damage or degradation to the waterproofing to manufacturer immediately, in order that arrangements can be made for remedial work to be carried out if necessary. It is recommended that a record is kept of the findings of the inspection to avoid confusion and provide an on-going record of roof performance. Plants suitable for an extensive green roof which will colonise in partial and full shade will generally be greener in colour and grow “taller” in these locations. There will be a significant variance in the growth and colour between the plants growing in full or partial shade and those exposed to full sunlight and this should be recognised as a feature of the biodiversity of each individual roof.

8.6 Outlets from blue roof

Inspection chambers containing orifice plates to be inspected regularly in accordance with the manufacturer recommendations (minimum twice annually):

- Remove litter and blockages as required
- Records of inspections and maintenance undertaken should be kept by the client.
- Check orifice plate for any sign of blockages Drainage design standards

9 Drainage design standards

The following guides and current British Standards will be used for the design of the drainage elements on this project:

- BS EN 752:2017 Drain and Sewer Systems Outside Buildings. Sewer System Management
- BS EN 12056 Gravity Drainage Systems Inside Buildings: Part 2
- Building Regulations 2010 Part H1 - Foul Water Drainage (2015 Edition)
- Building Regulations 2010 Part H2 - Wastewater Treatment Systems and Cesspools (2015 Edition)
- Building Regulations 2010 Part H3 - Rainwater Drainage (2015 Edition)
- Building Regulations 2010 Part H4 - Building Over Sewers (2015 Edition)
- Building Regulations 2010 Part H5 - Separate Systems of Drainage (2015 Edition)
- Building Regulations 2010 Part H6 - Solid Waste Storage (2015 Edition)
- Environment Agency “Control of Runoff from New Developments Interim Regional Guidance”
- National Planning Policy Framework
- Planning Practice Guidance

10 Materials

Item	Material	British standard
a) Drainage pipe work	Vitrified clayware	BS EN 295-1
	Cast iron	BS EN 877
	Concrete	BS 5911-1 and BS EN 1916
	uPVC	BS EN 1401-1
b) Precast inspection chambers	Precast concrete	BS 5911 Part 200
c) Drainage gullies and gratings	Vitrified clayware	BS EN 295-1
	Ductile iron	BS EN 124 D 400
d) Drainage channels and gratings	Polymer concrete	
	Ductile iron	BS EN 124 D 400
e) Access covers	Grey iron	BS EN 124
	Galvanised steel	Facta Class A, B & D
f) Cellular units	Polypropylene	
g) Geotextiles		

Appendix A

Topographic survey drawing






Appendix B

SuDS Strategy



ATTENUATION VIA EXTERNAL ATTENUATION TANKS, PERMAVOID AND BLUEROOF

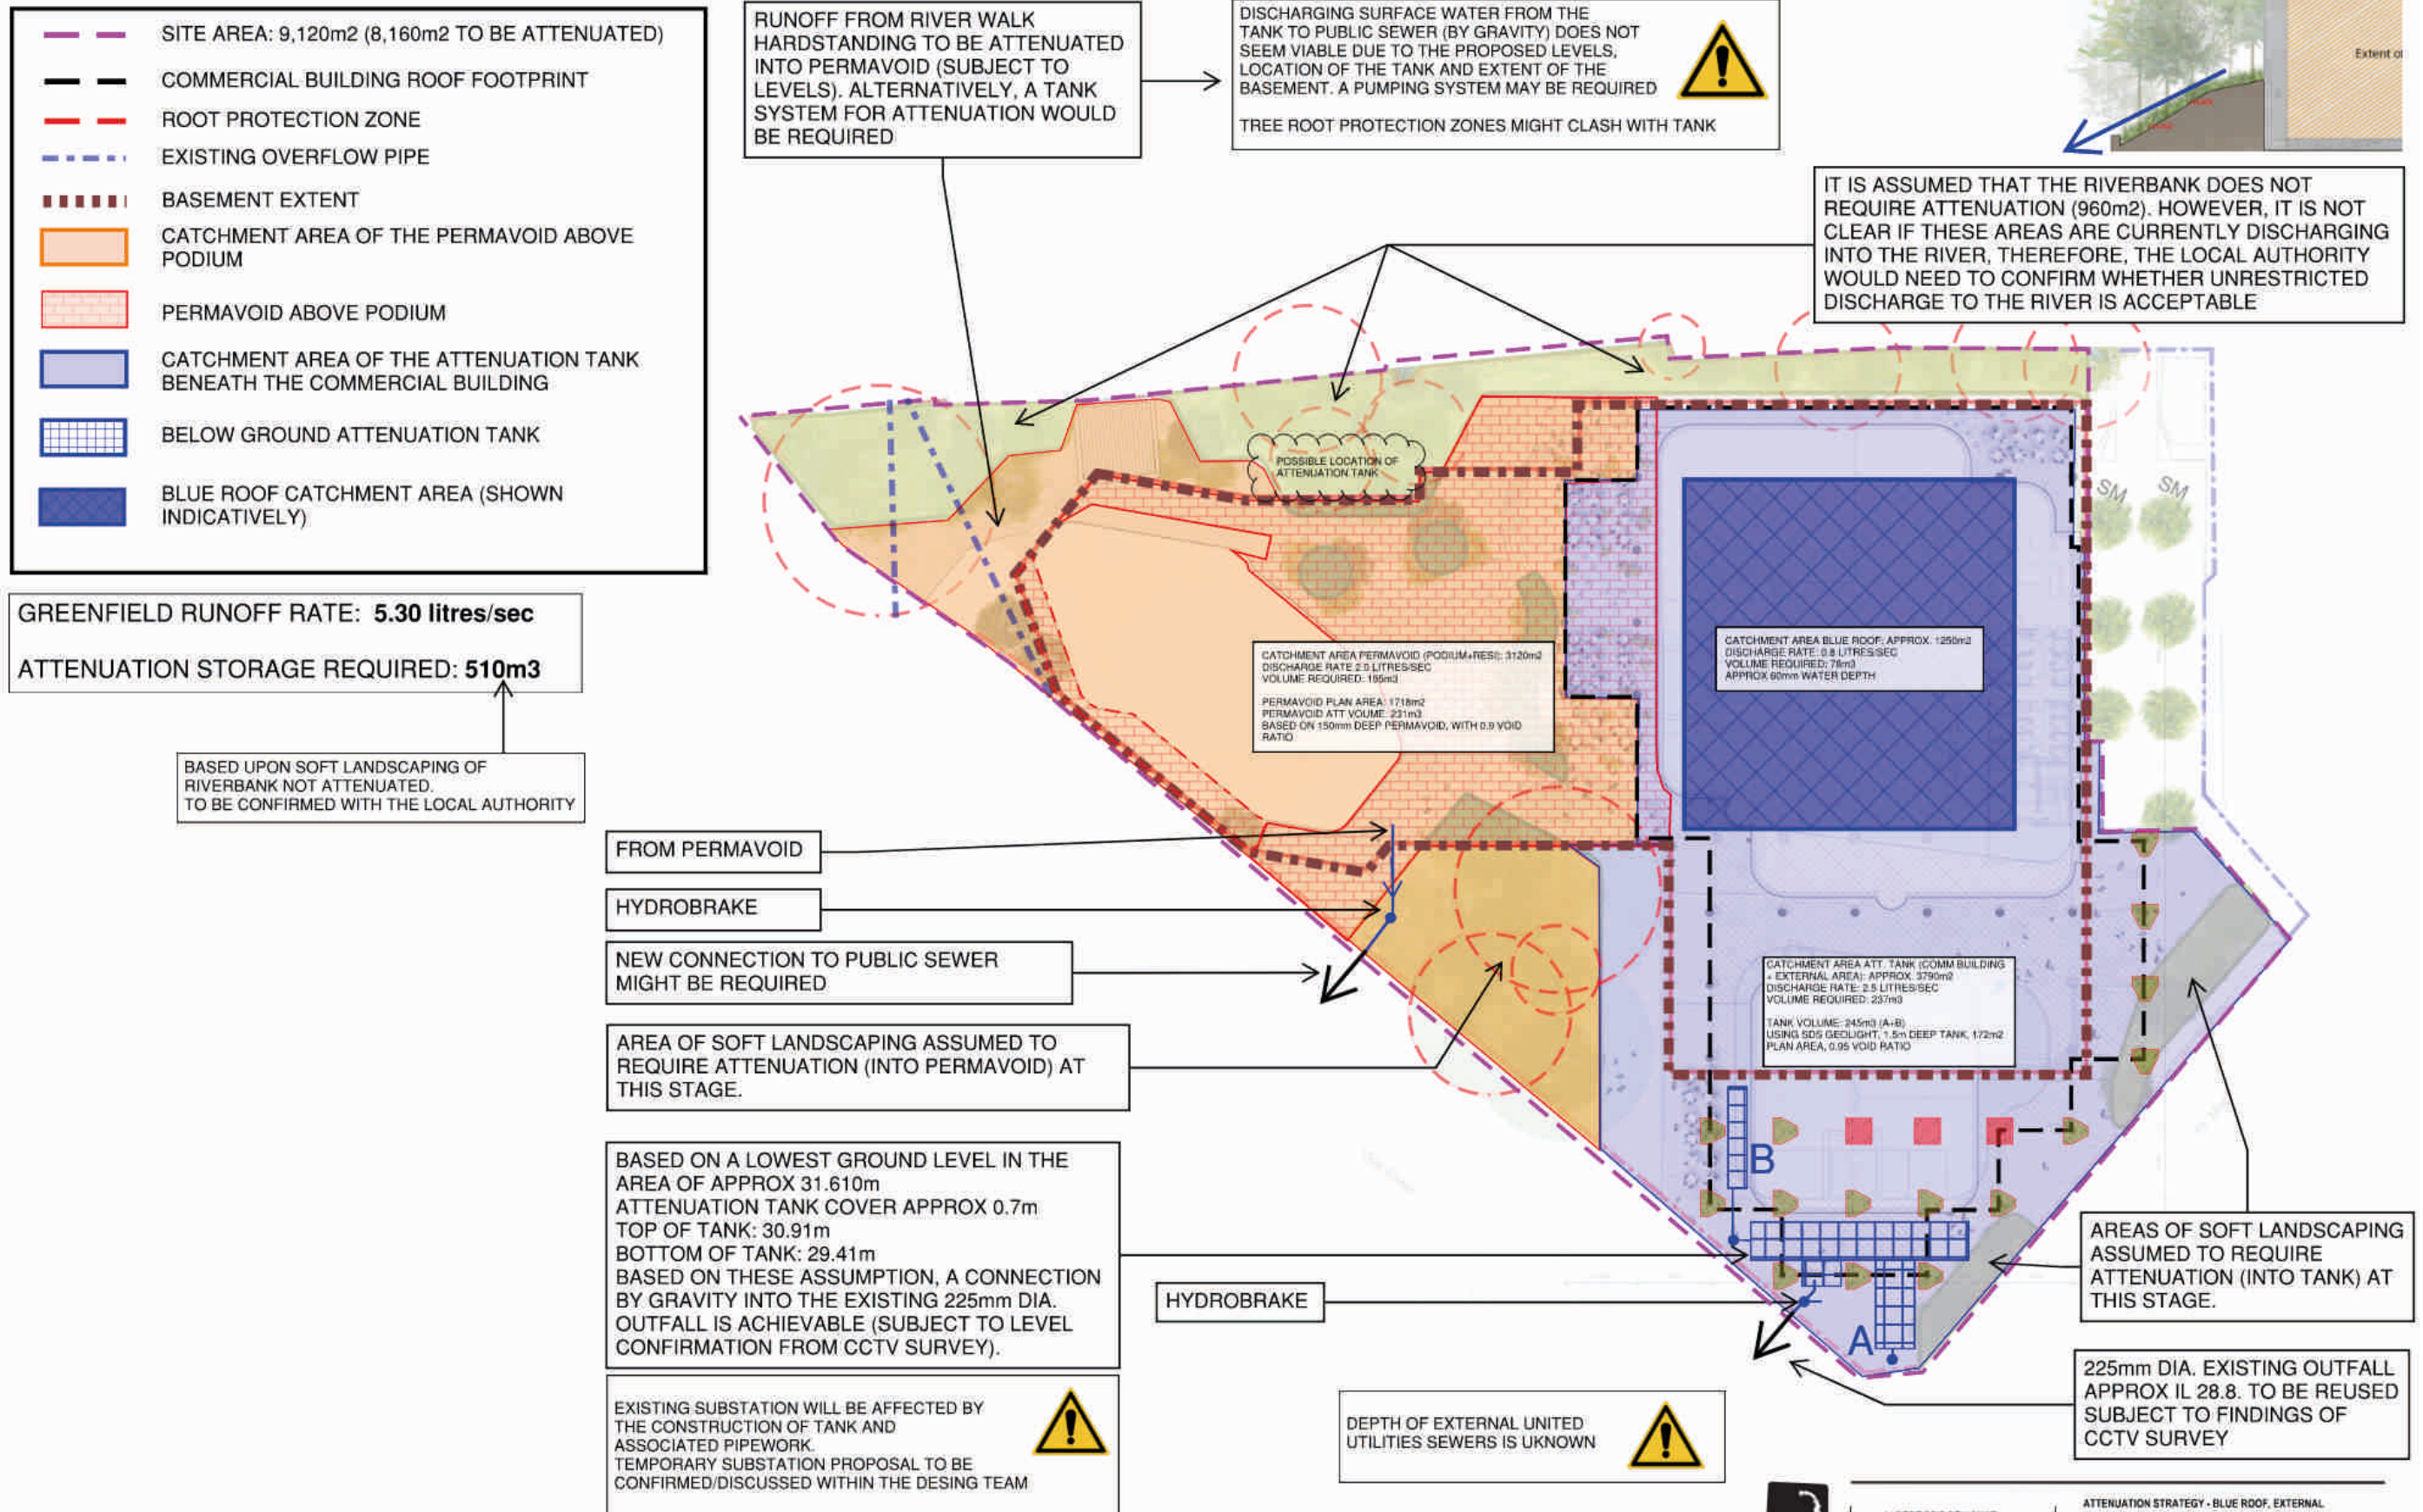

FOUL WATER STRATEGY

- SITE AREA BOUNDARY
- BASEMENT EXTENT
- ROOT PROTECTION ZONE
- EXISTING OVERFLOW PIPE
- EXISTING 525mm PUBLIC SEWER

FOUL WATER PIPE FROM INTERNAL ABOVE SLAB DRAINAGE SUBJECT TO COORDINATION WITH HOARELEA. APPROX IL AT BASEMENT INTERFACE TO BE 28.9m TO ALLOW A CONNECTION BY GRAVITY - TBC SUBJECT TO CCTV SURVEY FINDINGS


FOUL WATER TO BE COMBINED WITH SURFACE WATER FROM PODIUM (SEE 5222-C-SK-005) BEFORE BEING DISCHARGE TO COMBINED 525mm DIA. SEWER.

NEW COMBINED CONNECTION TO PUBLIC SEWER MIGHT BE REQUIRED SUBJECT TO CCTV SURVEY FINDINGS

COMBINED WATER PIPE FROM INTERNAL ABOVE SLAB DRAINAGE (FOUL WATER + SURFACE WATER FROM BLUEROOF) SUBJECT TO COORDINATION WITH HOARELEA. APPROX IL AT BASEMENT INTERFACE TO BE 29.2m TO ALLOW A CONNECTION BY GRAVITY TO PUBLIC SEWER - TBC SUBJECT TO CCTV SURVEY FINDINGS

COMBINED WATER FROM BUILDING TO BE COMBINED WITH SURFACE WATER FROM EXTERNAL ATTENUATION TANK (SEE 5222-C-SK-005) BEFORE BEING DISCHARGED TO COMBINED 525mm DIA. SEWER.

225mm DIA. EXISTING OUTFALL APPROX IL 28.8m. TO BE REUSED SUBJECT TO FINDINGS OF CCTV SURVEY

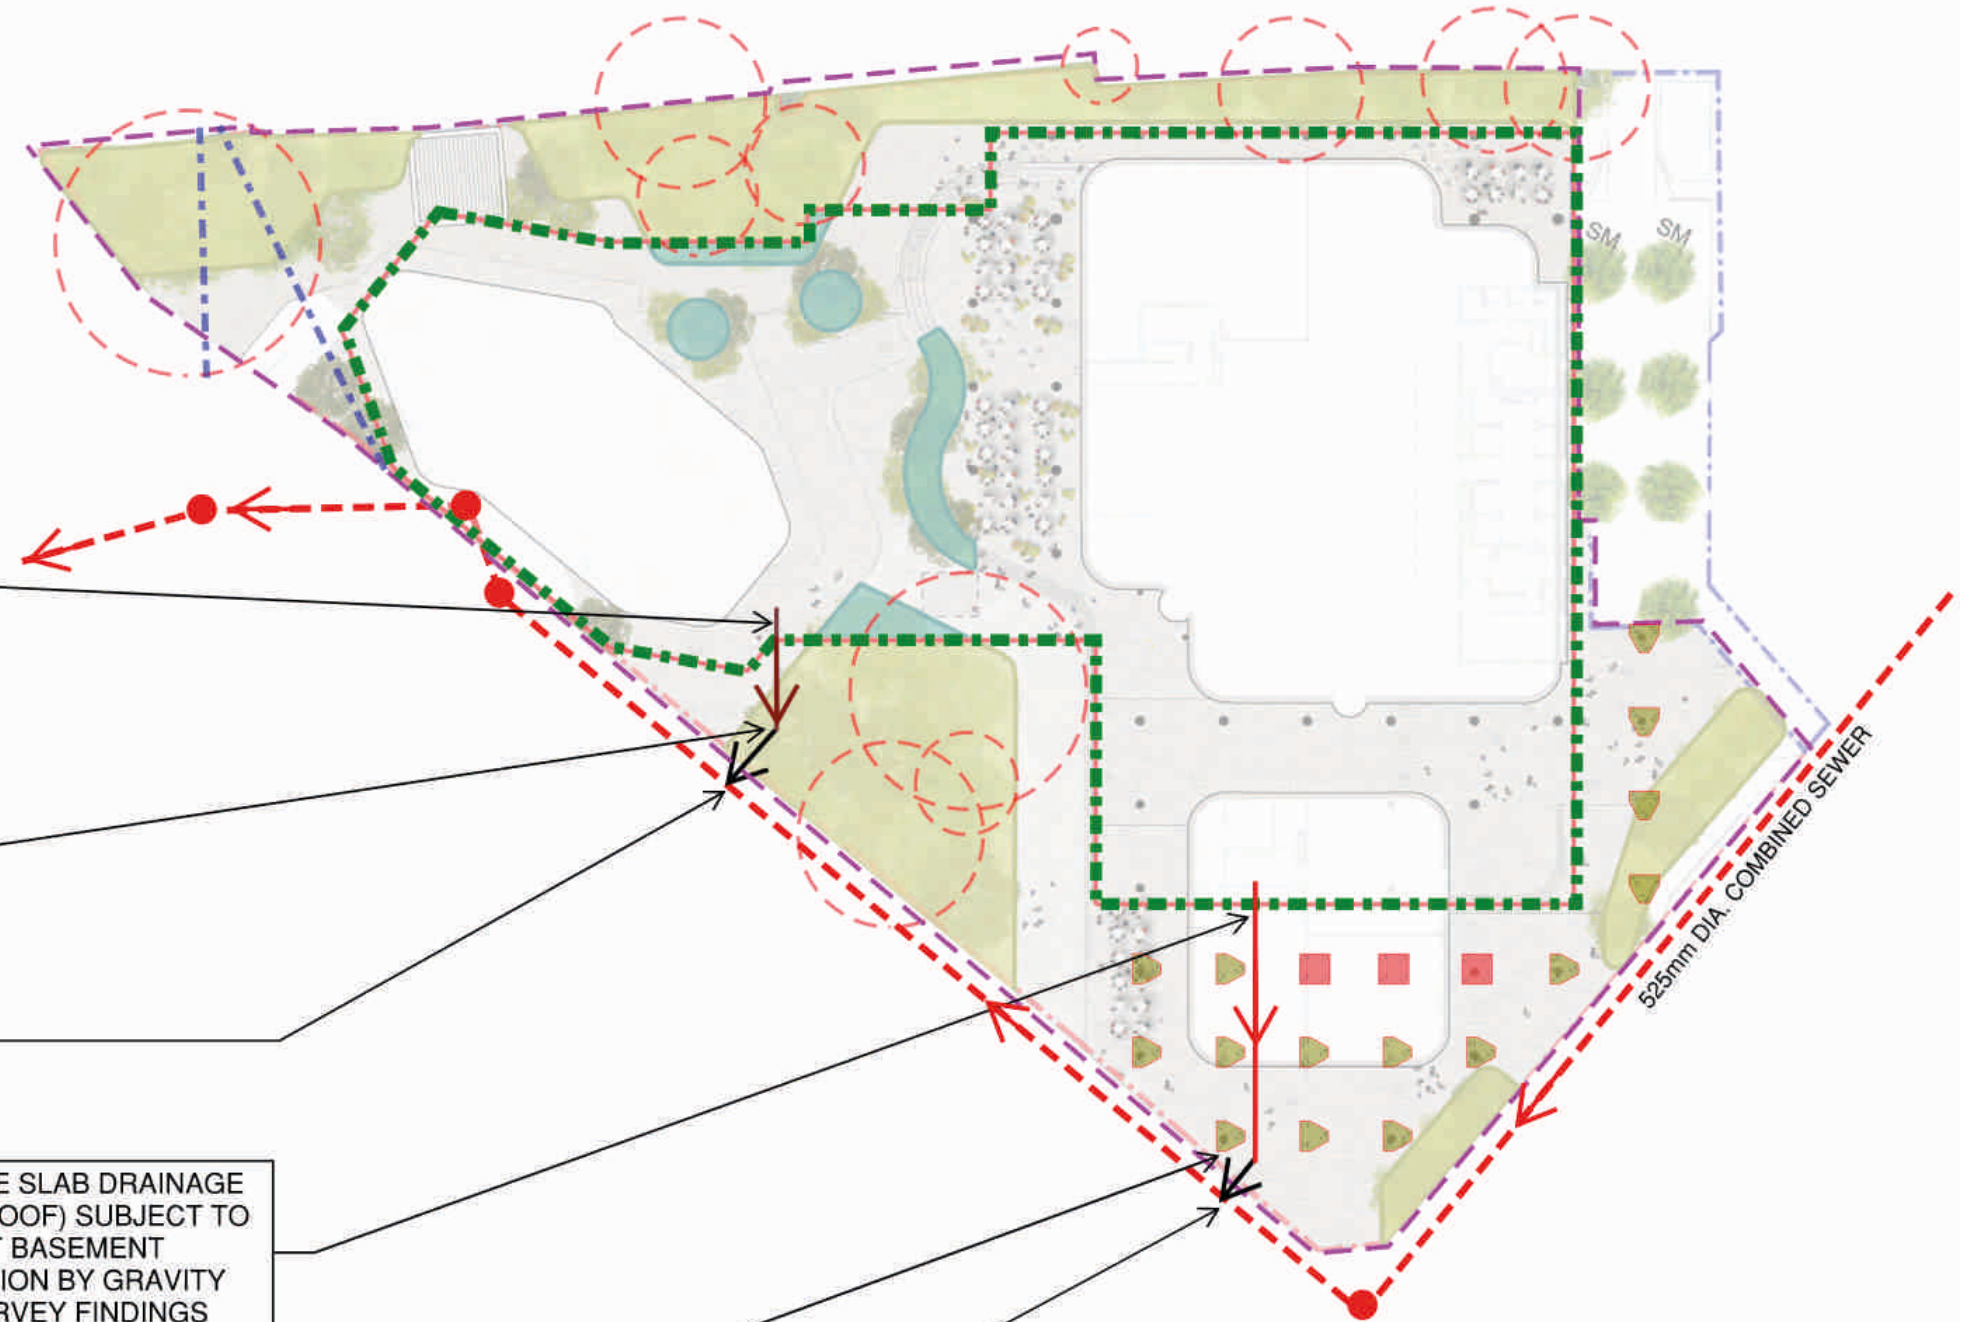


DEPTH OF EXTERNAL UNITED UTILITIES SEWERS IS UNKNOWN



PROJECT: ALBERT BRIDGE HOUSE		TITLE: FOUL WATER STRATEGY	
DATE: 18/08/2022	SCALE: N.T.S.	CAD FILENAME: *	STATUS: FOR DISCUSSION
DESIGNER: SZ	CHECKED: DN	PROJECT NO: 5222	PARAMETER NO: 5222-CSK11
		REV: P1	

LOCATION OF PROPOSED OUTFALL CONNECTIONS AND PROPOSED DISCHARGE RATES

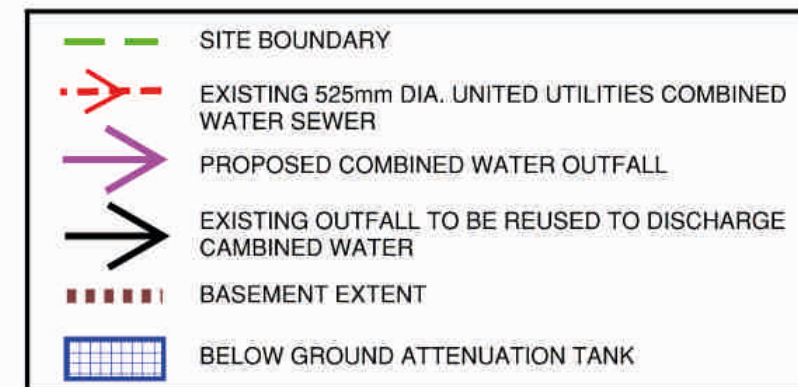

TOTAL PROPOSED SURFACE WATER DISCHARGE RATE: **5.30 litres/sec**

IT IS ASSUMED THAT THE SURFACE WATER WILL BE DISCHARGED BY GRAVITY INTO THE 525mm DIA. COMBINED WATER SEWER. THE SPLIT BETWEEN THE 2 OUTFALLS IS SUBJECT TO DESIGN DEVELOPMENT

PROPOSED FOUL WATER DISCHARGE RATE FROM RESIDENTIAL BUILDING: **25.6 litres/sec**

PROPOSED FOUL WATER DISCHARGE RATE FROM COMMERCIAL BUILDING: **12.8 litres/sec**

IT IS ASSUMED THAT AN ADDITIONAL **10 litres/sec** WILL BE FROM PLANTROOMS.

TOTAL PEAK FOUL FLOW RATE FROM THE SITE: **48.4 litres/sec**



PROJECT	ALBERT BRIDGE HOUSE	TITLE	PROPOSED OUTFALL CONNECTIONS AND DISCHARGE RATES
DATE	19/08/2022	SCALE	N.T.S.
DRAWN	SZ	CHECKED	DN
PROJECT NO.	5222	DRAWING NO.	5222-CSK12
REV	P2		

Appendix C

Pre-planning enquiry correspondence with United Utilities



Dariusz Nowacki

From: wastewaterdeveloperservices@uuplc.co.uk
Sent: 05 October 2022 09:39
To: Vasileios Sardellas
Subject: Pre Development Enquiry for: Albert Bridge house 1 Bridge Street Manchester M3 5AH UU Reference Number : 02856031

CAUTION: This email originated from outside of the organization. Do not click links or open attachments unless you recognize the sender. **Report if suspicious.**



Good Morning, Stefano

Pre Development Enquiry for: Albert Bridge house 1 Bridge Street Manchester M3 5AH UU Reference Number : 02856031

We have carried out an assessment of your application which is based on the information provided. This pre-development advice on your drainage strategy will be valid for 12 months. Your drainage strategy will need to be reviewed by other competent authorities as part of the planning process, and we advise that you carry out the necessary site investigations to confirm the viability of your proposals.

If your investigations require access to our public sewer network, we ask that you contact our network engineers with a request for an access certificate via our main contact telephone number 0345 6723 723 or refer to the link below:

<https://www.unitedutilities.com/builders-developers/working-near-our-assets/>

Foul Water

Foul flow from this site will be allowed to drain into the public foul water/combined sewer system.

We have no objection to the proposed point of discharge being to the 525mm diameter public combined sewer within Bridge Street located to the South of your proposed development at a maximum pass forward flow of 50l/s

If you are able to identify an alternative, more suitable point of discharge, we request that you contact us at your earliest convenience so that we can assess suitability.

In accordance with our infrastructure plans we may ask you to change your point of connection. Therefore please contact us when you are ready to formalise your drainage proposals, we would suggest before you submit for Full Planning.

Surface Water

All surface water flow from the proposed development should drain in-line with the drainage hierarchy, as outlined in Paragraph 80, (Reference ID: 7-080-20150323), of the National Planning Practice Guidance. We also recommend you prioritise the use of multi-functional sustainable drainage systems for the management of surface water in accordance with national planning policy.

Generally, the aim should be to discharge surface run off as high up the following hierarchy of drainage options as reasonably practicable.
This is outlined as follows, in order of priority:

- 1. **into the ground (infiltration);**
- 2. **to a surface waterbody;**
- 3. **to a surface water sewer or highway drain;**
- 4. **to a combined sewer.**

For guidance, The **North West SuDS Pro-Forma** provides information on the appropriate evidence required at each stage of the hierarchy, to demonstrate how each level has been discounted.

The Lead Local Flood Authority has responsibility for all surface water drainage concerns and their input to your proposal is critical. You should also consider whether it is necessary to discuss your proposal with the Environment Agency, or Internal Drainage Board (if operating in your area).

The Local Planning Authority are the determining authority for any application for planning permission and the appropriate authority for determining cost viability of a proposed drainage scheme, such assessments are outside of the jurisdiction of United Utilities.

Infiltration

Surface water runoff generated from this development should discharge to the ground via infiltration system where feasible.

A detailed evidence based feasibility assessment must be carried out in line with Chapter 25 of the CIRIA SuDS Manual 2015 to determine whether infiltration is a suitable method of surface water disposal.

Particular attention must be paid to Ground Water Source Protection Zones to ensure that the risk of pollution to these valuable resources is not compromised. Details can be obtained from the government website:

<https://www.gov.uk/guidance/groundwater-source-protection-zones-spzs#find-groundwater-spzs>

If your site is in a Groundwater Source Protection Zone, you should have regard to the Environment Agency's approach to Groundwater Protection. Information on this is available via the link below:

<https://www.gov.uk/government/publications/groundwater-protection-position-statements>

Please note that such a location could have implications for the principle of your development and the need for additional mitigating measures to protect the groundwater environment and public water supply in the detailed design of your site.

Waterbody

If an evidence based assessment has been carried out and confirms that infiltration is not feasible, we recommend that you contact the Lead Local Flood Authority and/or Environment Agency to discuss a point of discharge to the River Irwell located North of the proposed site.

We would encourage you to identify and engage with any third party landowner and riparian owner to agree access and discharge rights to the water body if this is not in your ownership.

Highway Drainage

If an evidence based assessment has been carried out and confirms that infiltration is not feasible, we recommend that you investigate the possibility of draining surface water to the highway drain where this ultimately discharges to a watercourse, by contacting the relevant Highway Authority.

Public Sewer

In accordance with the hierarchy of drainage options within the National Planning Practice Guidance, both discharge to ground via infiltration and discharge to a waterbody should be discounted prior to consideration of discharging surface water to the public sewer system. Evidence should be provided to demonstrate how these have been discounted, as outlined in the North West SuDS pro-forma.

Once evidence is provided as outlined above, United Utilities will consider a connection to the 525mm diameter public combined sewer within Bridge Street located South of the proposed site at a pass forward flow to be agreed by the Lead Local Flood Authority. United Utilities request that any agreed rate does not exceed 5.3l/s.

As a Water Company, we have no obligation to accept highway drainage into our public sewer network. However, should your proposals include runoff from highways, we would request that consideration is given to SuDS components that deliver source control are incorporated within the design of the scheme to reduce the volume and frequency of discharges of these flows to the public sewer.

Levels

For low-lying sites, (where the ground level of the site or the level of a basement is below

the ground level at the point where the drainage connects to the public sewer), care should be taken to ensure that the property is not at increased risk of flooding. If these circumstances exist, we recommend that you contact us to discuss further. It could affect the detailed design of your site and result in the need to incorporate appropriate mitigating measures in your drainage scheme.

Land drainage / Overland flows / track drainage

United Utilities have no obligation, and furthermore we do not accept land drainage, overland flows or track drainage into the public sewerage network under any circumstances

Existing Wastewater Assets Crossing the Site

According to our public sewer records there are public sewers located within your site boundary. We will require unrestricted access to the sewer for maintenance purposes, we would ask that you maintain a minimum clearance of 6m which is measured 3m from the centre line of the pipe unless there happens to be a formal easement agreement in place, in which case the specified easement width would apply. If you cannot achieve this then you may wish to consider diverting and or abandoning the public sewer.

Please be aware that any proposed diversion may require modelling. This process may take up to 6 months in order to reach an acceptable design.

Please refer to the link below to obtain full details of the processes involved with sewer diversions:

<https://www.unitedutilities.com/builders-developers/larger-developments/wastewater/sewer-diversions/>

Existing Water Assets Crossing the Site

It is the developer responsibility to identify utilities on-site. Where clean water assets are shown on our records, we recommend that you contact our Water Pre-Development Team, via the following email address: DeveloperServicesWater@uuplc.co.uk. Further information for this service can be found on our website via the link below:

<https://www.unitedutilities.com/builders-developers/larger-developments/pre-development/water-pre-dev/>

Connection Application

Although we may discuss and agree discharge points and rates in principle, please be aware that you will have to apply for a formal sewer connection. This is so that we can assess the method of construction, Health & Safety requirements and to ultimately inspect the connection when it is made. Details of the application process and the form itself can be obtained from our website by following the link below:

<https://www.unitedutilities.com/builders-developers/wastewater-services/sewer-connections/sewer-connection/>

We recommend that the detailed design should confirm the locations of all utilities in the area and ensure that any proposed drainage solution considers routing and clash checks where required.

If we can be of any further assistance please don't hesitate to contact us further.

Sewer Adoptions

You have indicated on your application form that you intend to put the sewers forward for adoption (including any SuDS components that can come within the meaning of a sewer).

United Utilities assess adoption applications based on the current Design & Construction Guidance and local practices which have now replaced 'Sewers For Adoption 6th Edition'.

We recommend that you submit a pre design assessment to the sewer adoption mailbox (SewerAdoptions@uuplc.co.uk) stating pre design assessment in the title

Please refer to links below to obtain further guidance:

<https://www.unitedutilities.com/builders-developers/larger-developments/wastewater/sewer-adoptions/>

Site drainage must be designed in accordance with Building Regulations, National Planning Policy, and local flood authority guidelines, we would recommend that you speak and make suitable agreements with the relevant statutory bodies.

If you intend to put forward your wastewater assets for adoption by United Utilities, the proposed detail design will be subject to a technical appraisal by an Adoption Engineer as we

need to be sure that the proposals meets the requirements set out in the Design & Construction Guidance. The proposed design should give consideration to long term operability and give United Utilities a safe and cost effective proposal for the lifetime of the assets. In these cases, we strongly recommend that no construction commences until the detailed drainage design, submitted as part of the Section 104 application, has been assessed and accepted in writing by United Utilities. Any work carried out prior to the technical assessment being approved is done entirely at the developer's own risk and could be subject to change.

SuDS

If your development proposal incorporates any SuDS component(s) which interact with a sewer network you plan on offering for adoption to United Utilities; contact should be made with our technical team at your earliest convenience, please complete the 'Section 104 pre-application form : ' and include as much relevant detail as you can. These discussions can help prevent delays later in the development process.

Section 104 Pre application form (1b)

As per the sewerage sector guidance, all SuDS should be designed in accordance with the standards within the Design & construction guidance & the CIRIA SuDS manual (C753)

Codes For Adoption

The new Codes for Adoption are outlined on the Water UK Website. The link below takes you to their webpage:

<https://www.water.org.uk/technical-guidance/developers-services/codes-for-adoption/>

A free copy of the new Design & Construction Guidance can be downloaded via the link below:

<https://www.water.org.uk/sewerage-sector-guidance-approved-documents/>

Many thanks and kind regards,



United Utilities
Water for the North West

Gary Jaundrell
Assistant Developer Engineer
Developer Services & Metering
Customer Services
T: 07388 715 589
unitedutilities.com

If you have received a great service today why not tell us?
Visit: unitedutilities.com/wow

Did you know we now have a live chat facility available to you Mon to Friday 8 - 5pm. You just click on the orange live chat box on our webpage and one of our advisors will be ready to chat to you and help you with your enquiry <https://www.unitedutilities.com/builders-developers/> or you can email us at WastewaterDeveloperServices@uuplc.co.uk

Coronavirus | Prevent the spread



Wash hands



Disinfect common surfaces



Practise social distancing



Stay home if you have symptoms

[Click for our message to customers](#)



United Utilities
Water for the North West

Registered in England and Wales. Company number 6559020.
© United Utilities Group PLC 2021



The information contained in this e-mail is intended only for the individual to whom it is addressed. It may contain legally privileged or confidential information or otherwise be exempt from disclosure. If you have received this Message in error or there are any problems, please notify the sender immediately and delete the message from your computer. You must not use, disclose, copy or alter this message for any unauthorised purpose. Neither United Utilities Group PLC nor any of its subsidiaries will be liable for any direct, special, indirect or consequential damages as a result of any virus being passed on, or arising from the alteration of the contents of this message by a third party.


United Utilities Group PLC, Haweswater House, Lingley Mere Business Park, Lingley Green Avenue, Great Sankey, Warrington, WA5 3LP
Registered in England and Wales. Registered No 6559020

www.unitedutilities.com
www.unitedutilities.com/subsidiaries

Appendix D

Proposed sewer diversion drawings





--- SITE BOUNDARY

 EXISTING COMBINED UNITED UTILITIES MANHOLE
(LOCATION AND SIZE SHOWN INDICATIVELY)

 EXISTING UNITED UTILITIES COMBINED WATER
SEWER

 EXISTING FOUL WATER PIPE




Consulting Structural and Civil Engineers
White Collar Factory,
1 Old Street Yard,
London,
EC1Y 8AF
T +44 (0)20 7250 7777
F +44 (0)20 7250 5555
E info@ak3-uk.com
W www.ak3-uk.com

ALBERT BRIDGE HOUSE

SITE PROPOSAL SHOWING THE CLASH BETWEEN BUILDING FOUNDATION AND UNITED UTILITIES ASSET

S2	11.04.2022	DN	A0
DRAWN BY	DRAWN DATE	CHECKED BY	SHEET SIZE
5222M	STAGE 2	S2	1200
PROJECT No.	PROJECT STAGE	SUB-ABILITY CODE	SCALE
5222M	AKT XX 00	DR C	21000
PROJECT ID	ORIGINATOR	ZONE	LEVEL
		TYPE	SCALE
		DRAWING No.	REVISION

FOR INFORMATION ONLY

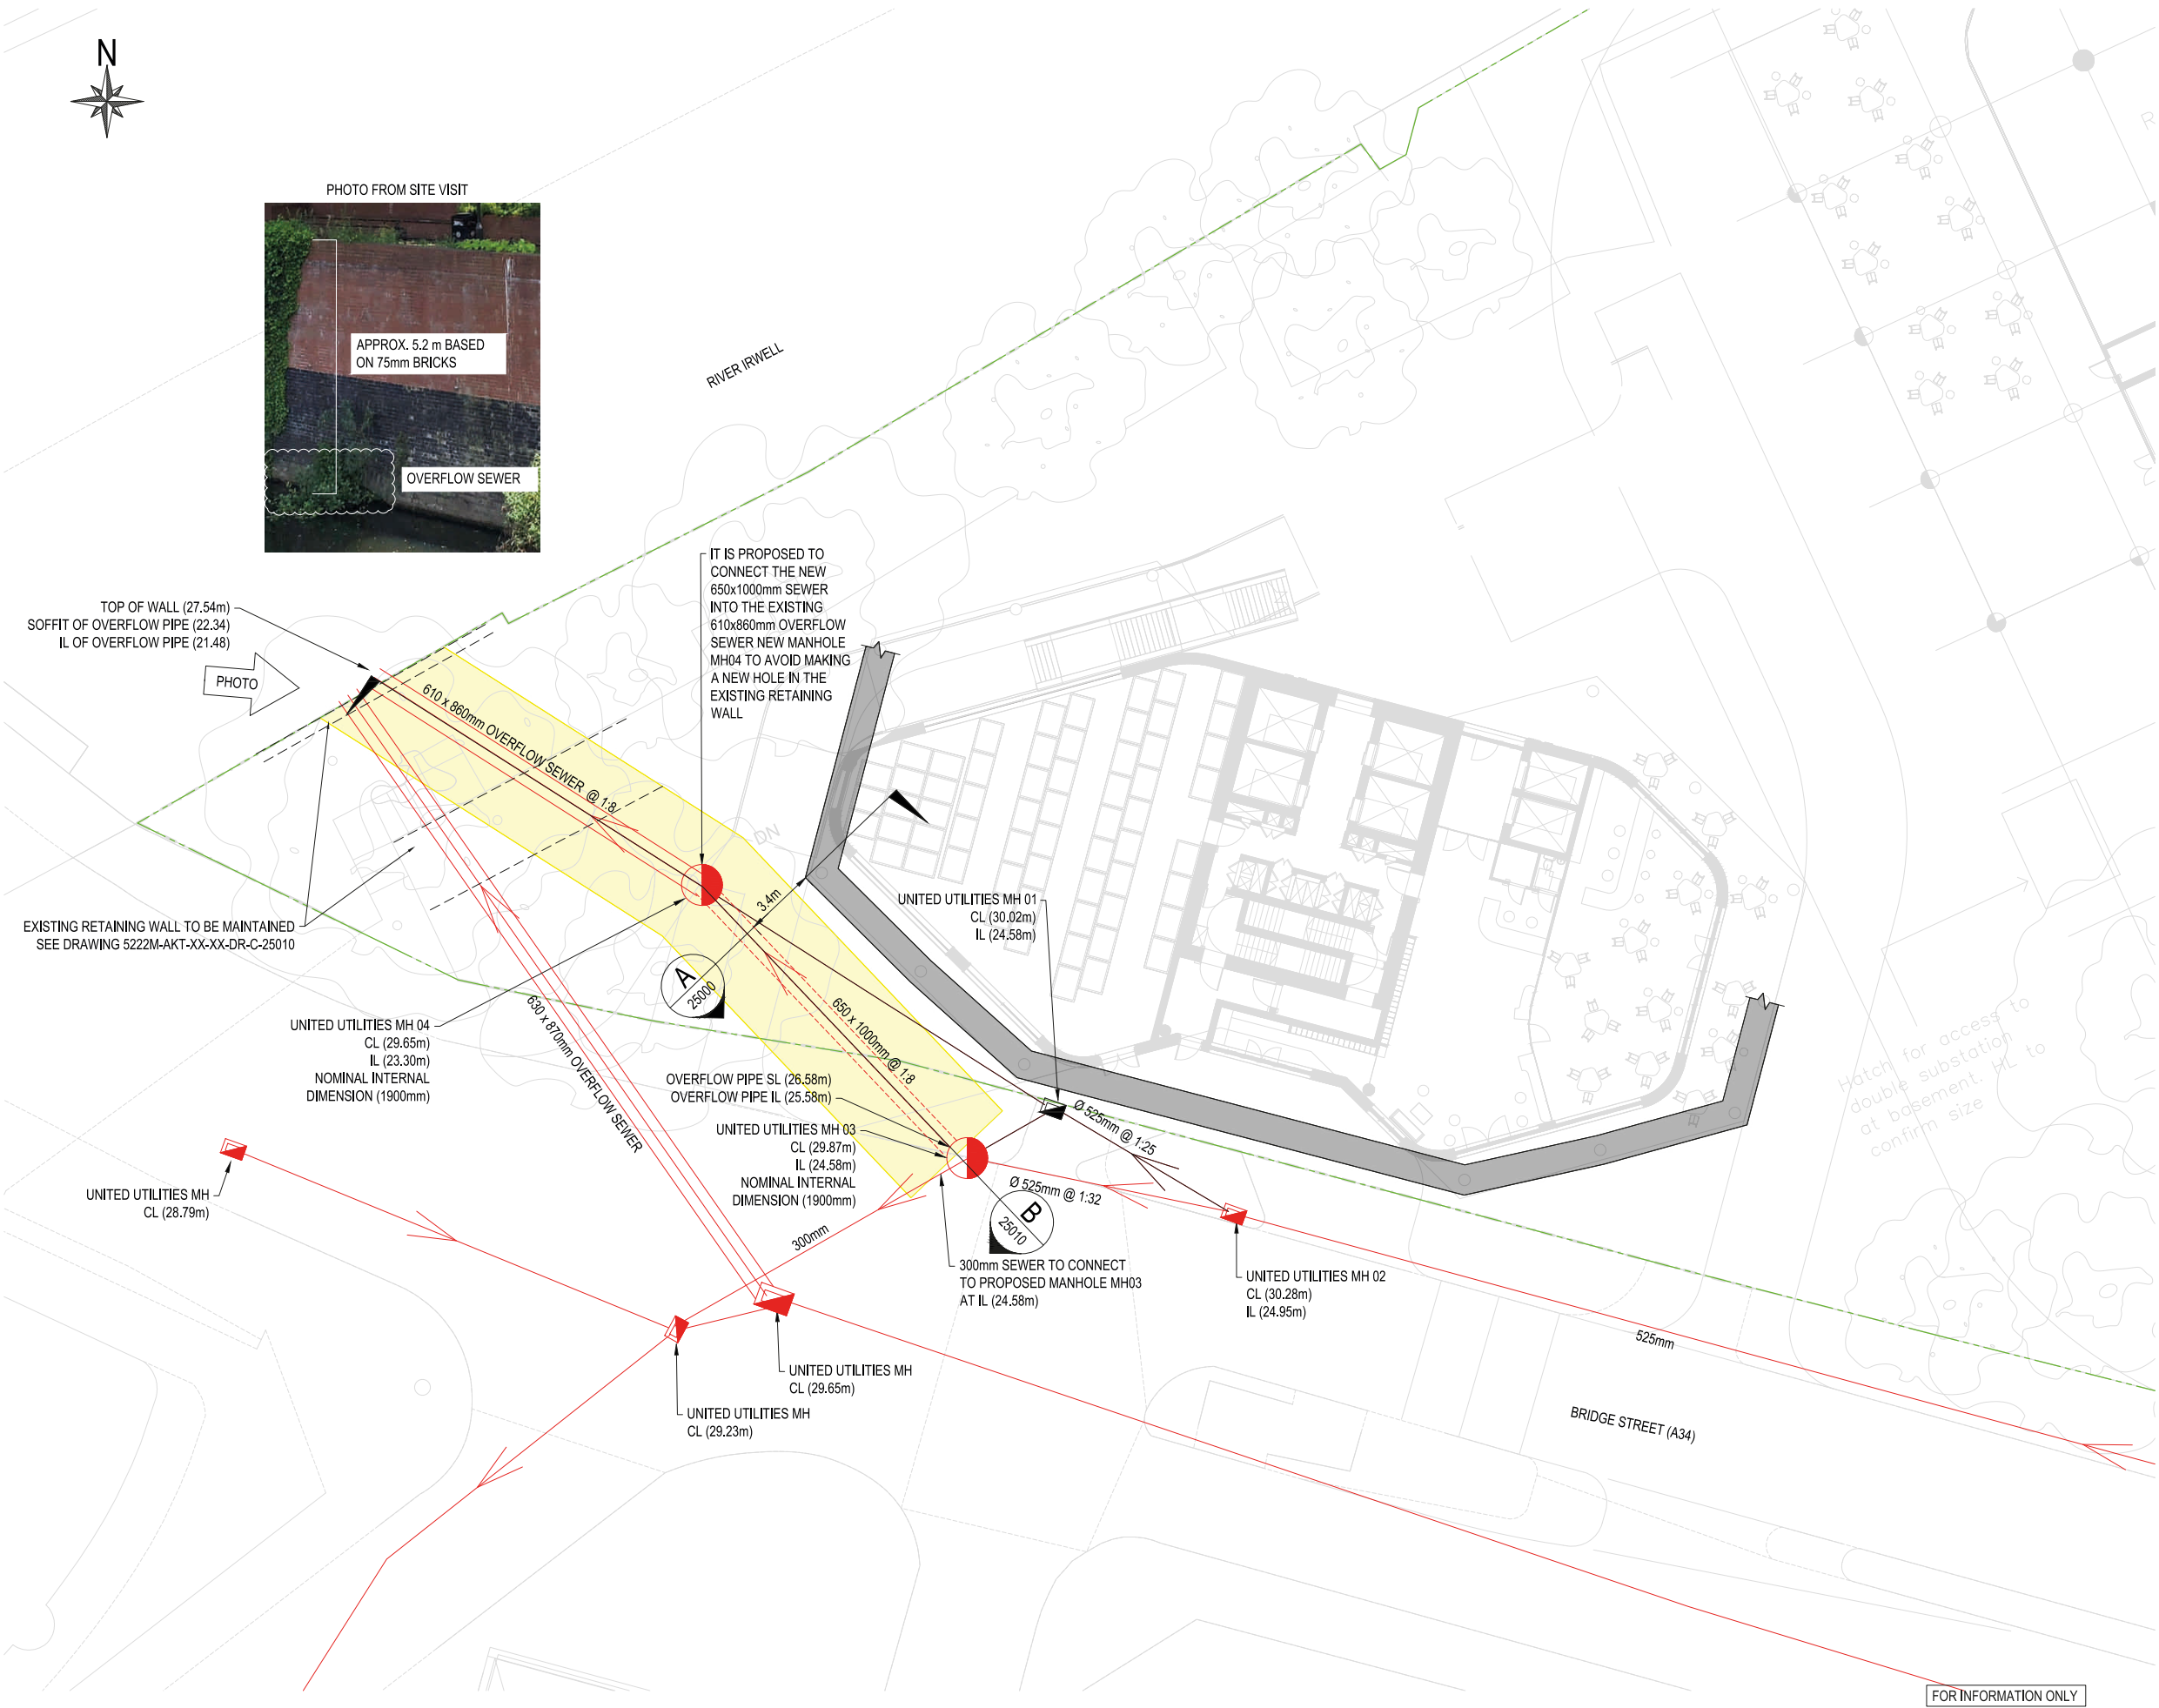

- NOTES
1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL AKT II DRAWINGS AND ALL OTHER RELEVANT ARCHITECTS, ENGINEERS AND LANDSCAPE ARCHITECTS' DRAWINGS AND SPECIFICATIONS.
 2. ALL DIMENSIONS AND LEVELS SHOWN ARE IN METRES UNLESS INDICATED OTHERWISE.
 3. DO NOT SCALE FROM THIS DRAWING.
 4. BEFORE STARTING WORK, THE CONTRACTOR IS TO CHECK INVERT LEVELS AND POSITIONS OF ALL EXISTING DRAINING SEWERS, INSPECTION CHAMBERS AND MANHOLES AGAINST DRAWINGS AND REPORT ANY DISCREPANCIES TO THE ENGINEER.
 5. THIS DRAWING HAS BEEN PRODUCED USING THE INFORMATION AVAILABLE IN PARTICULAR UNITED UTILITIES ASSET MAP AND THE UTILITY SURVEY DRAWING NUMBER 26100 PRODUCED BY MK SURVEYS DATED OCTOBER 2015.

- LEGEND
- SITE BOUNDARY
 - EXISTING COMBINED UNITED UTILITIES MANHOLE (LOCATION AND SIZE SHOWN INDICATIVELY)
 - EXISTING COMBINED UNITED UTILITIES MANHOLE TO BE MADE REDUNDANT
 - PROPOSED COMBINED WATER MANHOLE TO BE ADOPTED BY UNITED UTILITIES
 - EXISTING UNITED UTILITIES COMBINED WATER SEWER
 - EXISTING Foul WATER PIPE
 - PROPOSED COMBINED WATER SEWER TO BE ADOPTED BY UNITED UTILITIES
 - EXISTING UNITED UTILITIES COMBINED WATER SEWER TO BE MADE REDUNDANT
 - PROPOSED SEWER EXTERNAL WALL
 - EXISTING SEWER EXTERNAL WALL (ASSUMED)
 - Øm EASEMENT (3m EITHER SIDE OF THE SEWER CENTERLINE)
 - PROPOSED R.C. CAPPING BEAM

P2 01/08/2022 SEWER DIVERSION APPLICATION S2 DP
P1 27/05/2022 SEWER DIVERSION APPLICATION S2 DP
DATE 11/04/2022

akt II Consulting Structural and Civil Engineers

White Collar Factory,
100 Great Street,
London,
EC1V 0AF

T +44 (0)20 7260 7777
F +44 (0)20 7260 8655
E info@akt-ii.com
W www.akt-ii.com

THE OVAL

ALBERT BRIDGE HOUSE

OVERLOW SEWER
PROPOSED DIVERSION

NO.	DATE	BY	CHKD BY	APP'D BY
S2	11.04.2022	DN	11.04.2022	AD
5222M	STAGE 2	S2	11.04.2022	100
5222M AKT XX 00 DR C 20010 P2				

FOR INFORMATION ONLY

Appendix E

Geological Maps



Geology 1:10,000 Maps Legends

Artificial Ground and Landslip

Map Colour	Lex Code	Rock Name	Rock Type	Min and Max Age
	MGR	Made Ground (Undivided)	Artificial Deposit	Holocene - Holocene
	WMGR	Infilled Ground	Artificial Deposit	Holocene - Holocene
	WGR	Worked Ground (Undivided)	Void	Holocene - Holocene

Superficial Geology

Map Colour	Lex Code	Rock Name	Rock Type	Min and Max Age
	ALV	Alluvium	Sand with Clay And Gravel	Flandrian - Pleistocene
	ALV	Alluvium	Clay, Silt, Sand and Gravel	Flandrian - Pleistocene
	GFSDD	GLACIOFLUVIAL SHEET DEPOSITS, DEVENSIAN	Sand and Gravel	Devensian - Ipswichian
	TILLD	Till, Devensian	Diamicton	Devensian - Ipswichian
	RTD1	River Terrace Deposits, 1	Sand and Gravel	Quaternary - Ryazanian

Bedrock and Faults

Map Colour	Lex Code	Rock Name	Rock Type	Min and Max Age
	CPB	Chester Pebble Beds Formation	Sandstone	Early Triassic - Early Triassic
	MM	Manchester Marls Formation	Mudstone	Late Permian - Late Permian
	Fault			



Geology 1:10,000 Maps

This report contains geological map extracts taken from the BGS Digital Geological map of Great Britain at 1:10,000 scale and is designed for users carrying out preliminary site assessments who require geological maps for the area around a site. This mapping may be more up to date than previously published paper maps.


The various geological layers - artificial and landslip deposits, superficial geology and solid (bedrock) geology are displayed in separate maps, but superimposed on the final 'Combined Surface Geology' map. All map legends feature on this page.

Please Note: Not all of the layers have complete nationwide coverage, so availability of data for relevant map sheets is indicated below.

Geology 1:10,000 Maps Coverage

Map ID:	1
Map Name:	SJ89NW
Map Date:	1973
Bedrock Geology:	Available
Superficial Geology:	Available
Artificial Geology:	Available
Faults:	Available
Landslip:	Not Available
Rock Segments:	Not Available

Geology 1:10,000 Maps - Slice A

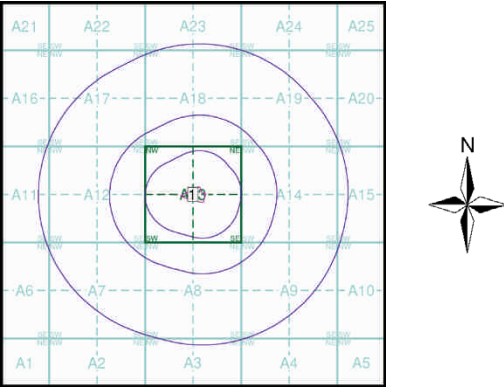


Order Details

Order Number:	173200128_1_1
Customer Ref:	4387
National Grid Reference:	383420, 398370
Slice:	A
Site Area (Ha):	1.04
Search Buffer (m):	1000

Site Details

Brother UK Ltd, Bridge House, Bridge Street, AUDENSHAW, M34 5JD

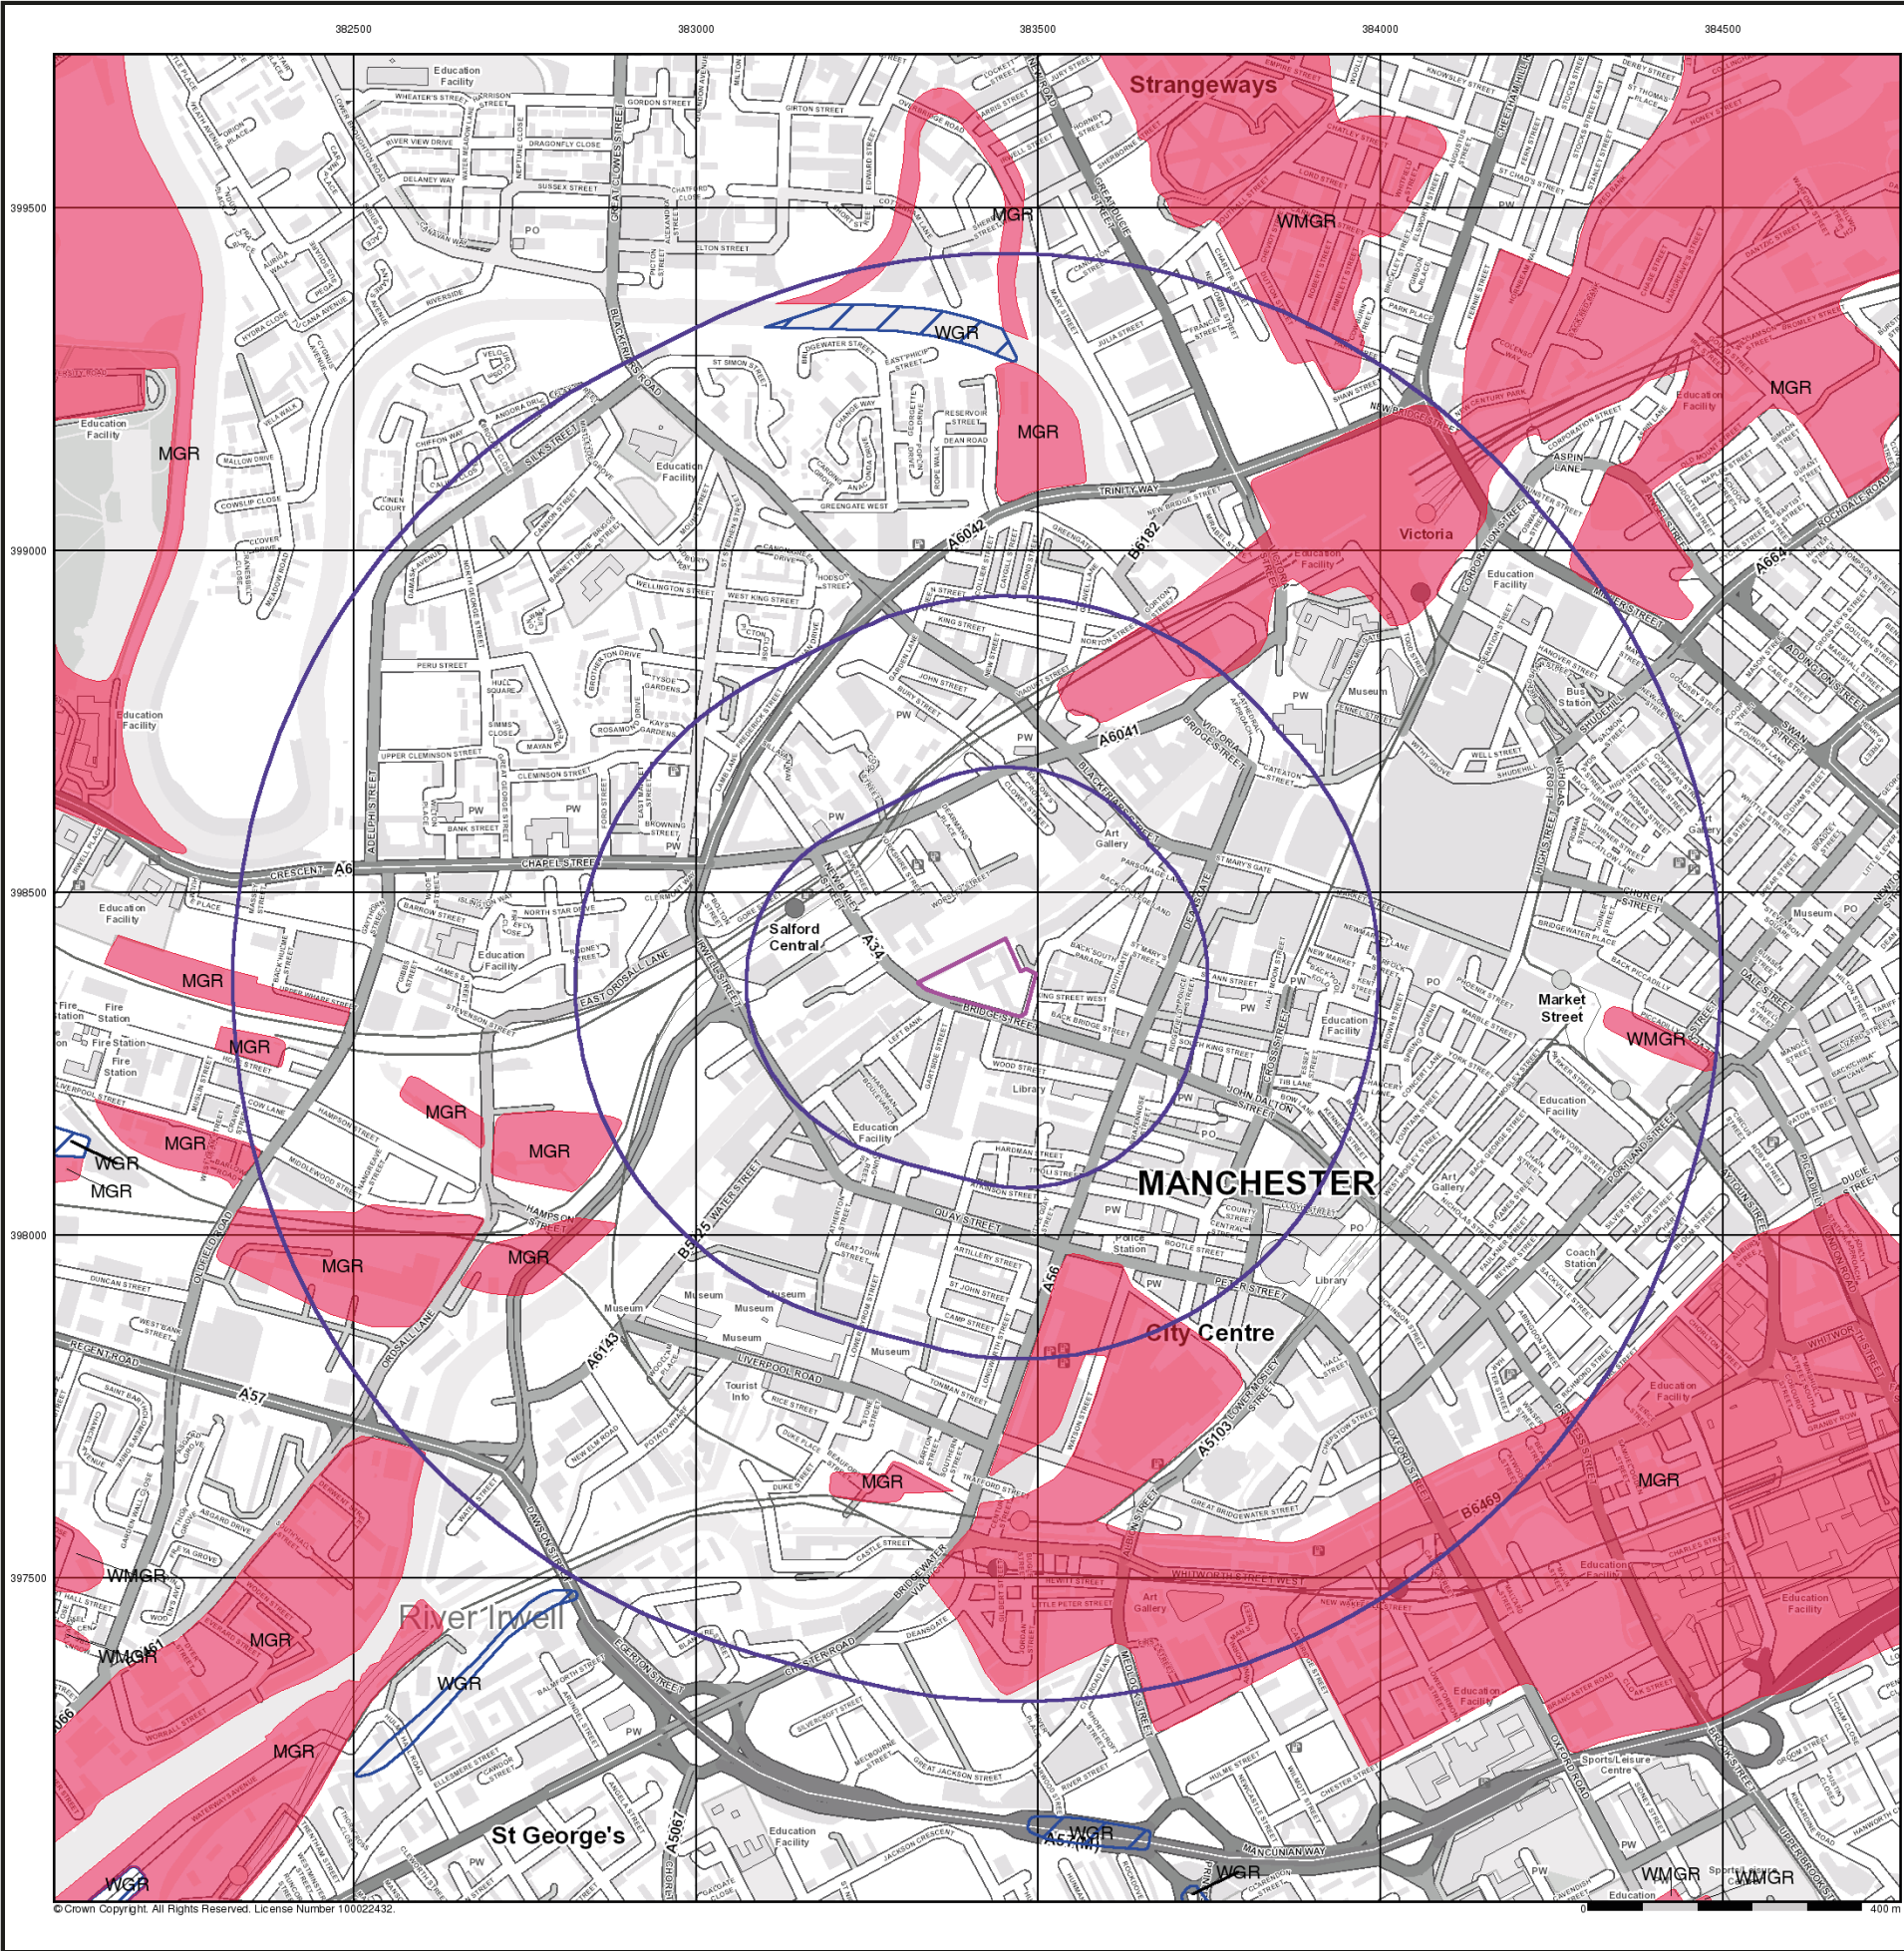

Artificial Ground and Landslip


Artificial ground is a term used by BGS for those areas where the ground surface has been significantly modified by human activity. Information about previously developed ground is especially important, as it is often associated with potentially contaminated material, unpredictable engineering conditions and unstable ground.

Artificial ground includes:

- Made ground - man-made deposits such as embankments and spoil heaps on the natural ground surface.
- Worked ground - areas where the ground has been cut away such as quarries and road cuttings.
- Infilled ground - areas where the ground has been cut away then wholly or partially backfilled.
- Landscaped ground - areas where the surface has been reshaped.
- Disturbed ground - areas of ill-defined shallow or near surface mineral workings where it is impracticable to map made and worked ground separately.

Mass movement (landslip) deposits on BGS geological maps are primarily superficial deposits that have moved down slope under gravity to form landslips. These affect bedrock, other superficial deposits and artificial ground. The dataset also includes founded strata, where the ground has collapsed due to subsidence.

Artificial Ground and Landslip Map - Slice A

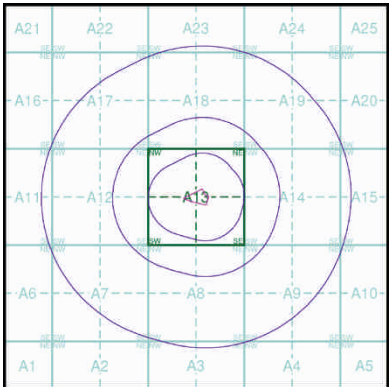

Order Details


Order Number: 173200128_1_1
Customer Ref: 4387
National Grid Reference: 383420, 398370
Slice: A
Site Area (Ha): 1.04
Search Buffer (m): 1000

Site Details

Brother UK Ltd, Bridge House, Bridge Street, AUDENSHAW, M34 5JD



Tel: 0844 844 9952
Fax: 0844 844 9951
Web: www.envirocheck.co.uk

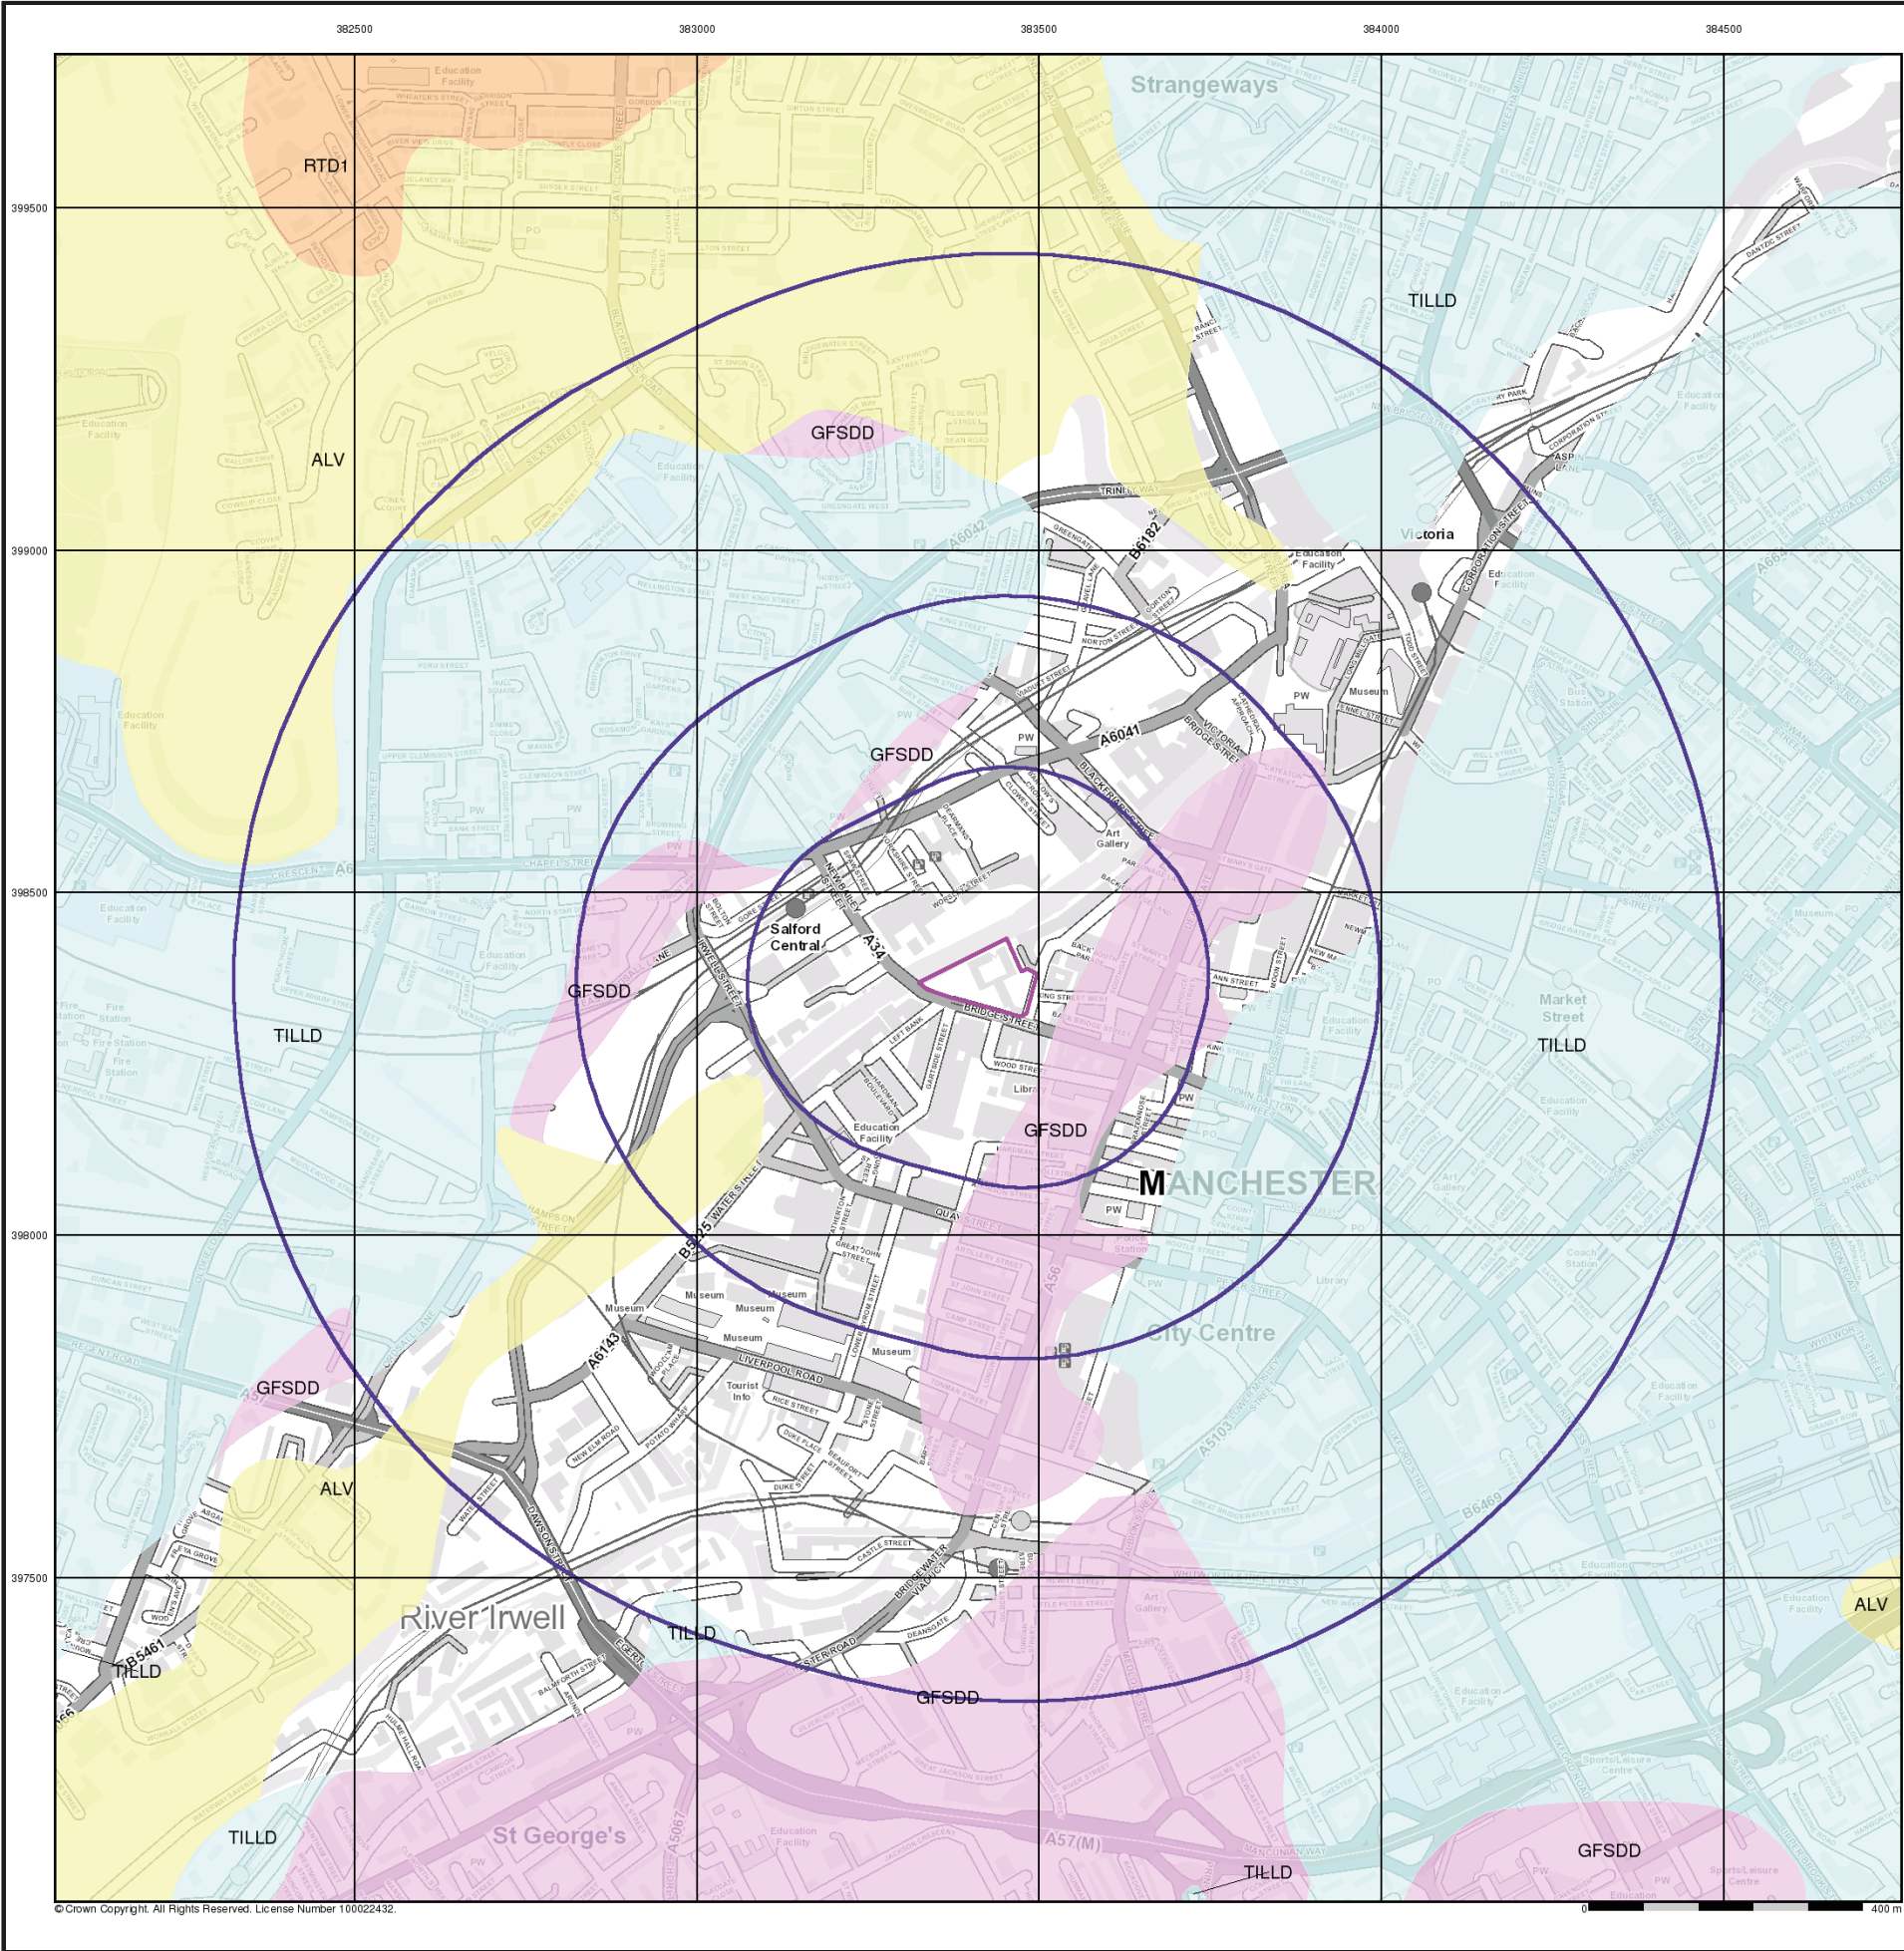


Superficial Geology

BGS 1:10,000 Superficial Deposits are the youngest geological deposits formed during the most recent period of geological time, which extends back about 1.8 million years from the present.

They rest on older deposits or rocks referred to as Bedrock. This dataset contains Superficial deposits that are of natural origin and 'in place'. Other superficial strata may be held in the Mass Movement dataset where they have been moved, or in the Artificial Ground dataset where they are of man-made origin.

Most of these Superficial deposits are unconsolidated sediments such as gravel, sand, silt and clay, and onshore they form relatively thin, often discontinuous patches or larger spreads.

Superficial Geology Map - Slice A

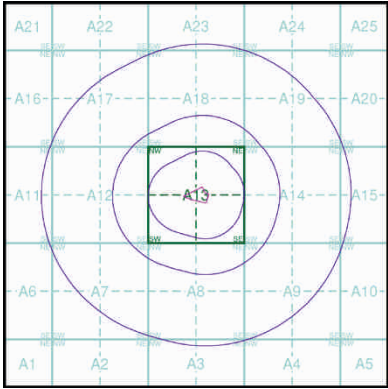

Order Details


Order Number: 173200128_1_1
Customer Ref: 4387
National Grid Reference: 383420, 398370
Slice: A
Site Area (Ha): 1.04
Search Buffer (m): 1000

Site Details

Brother UK Ltd, Bridge House, Bridge Street, AUDENSHAW, M34 5JD



Tel: 0844 844 9952
Fax: 0844 844 9951
Web: www.envirocheck.co.uk

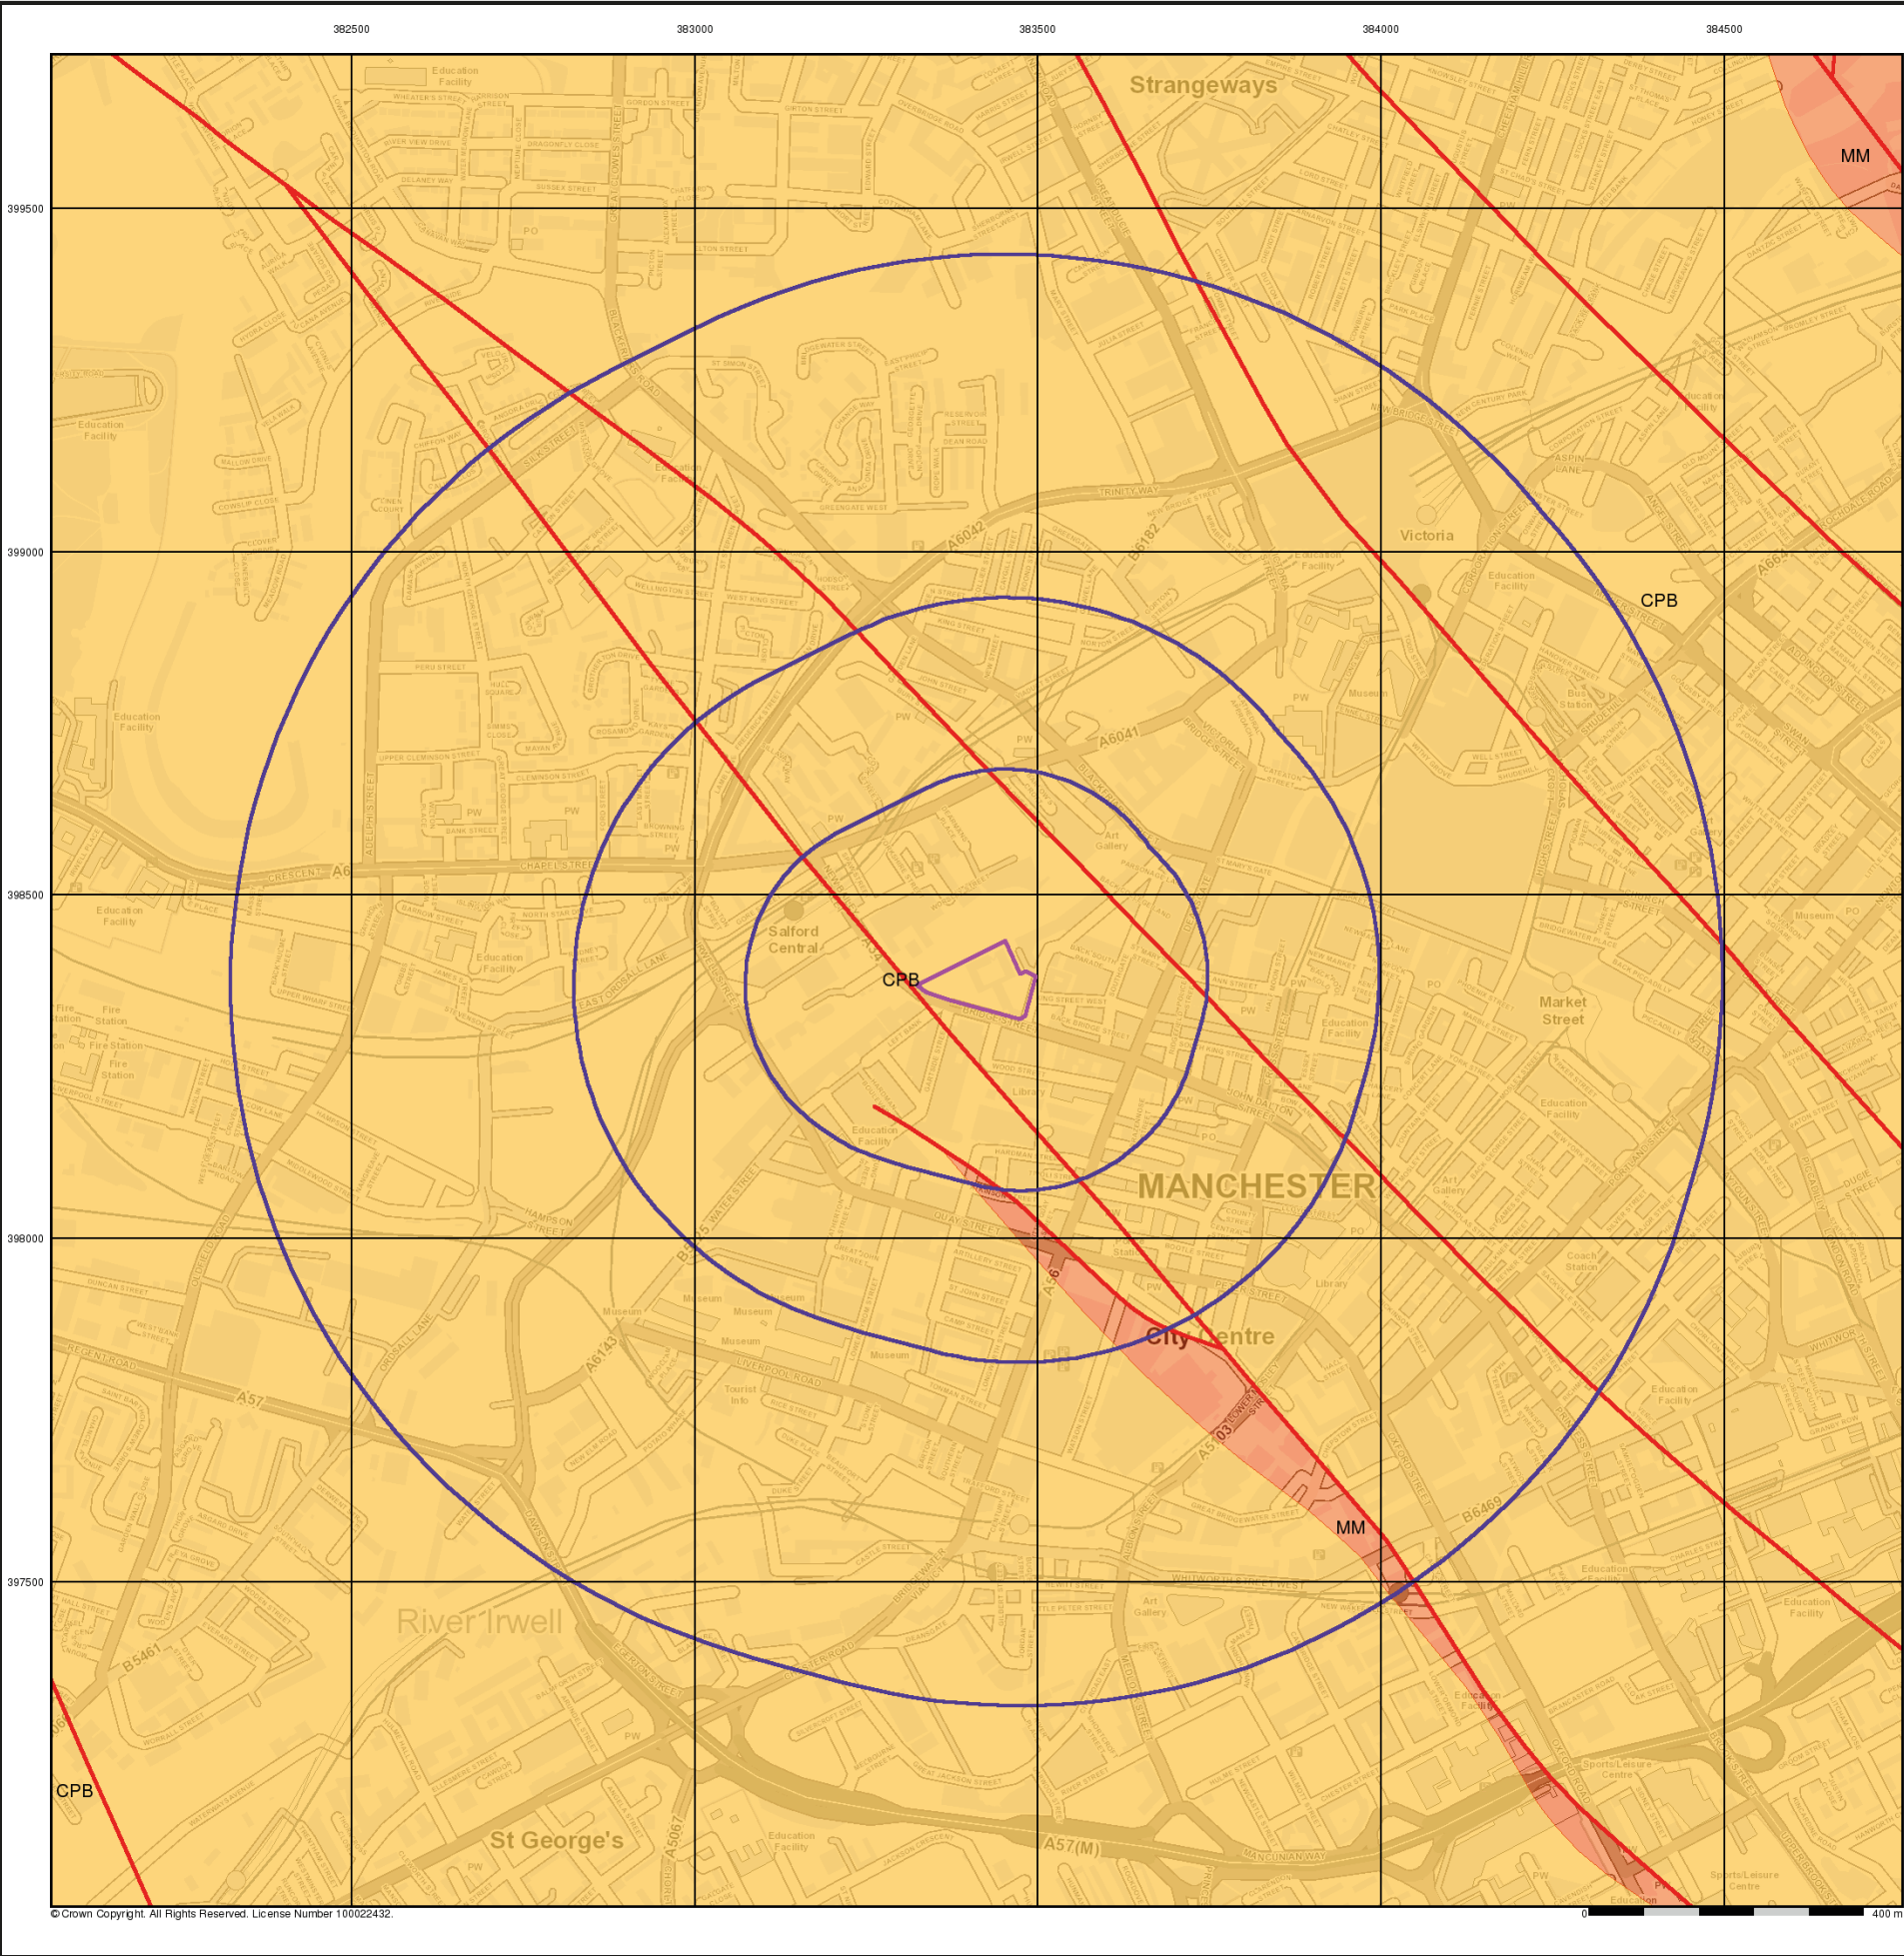

Bedrock and Faults


Bedrock geology is a term used for the main mass of rocks forming the Earth and are present everywhere, whether exposed at the surface in outcrops or concealed beneath superficial deposits or water.

The bedrock has formed over vast lengths of geological time ranging from ancient and highly altered rocks of the Proterozoic, some 2500 million years ago, or older, up to the relatively young Pliocene, 1.8 million years ago.

The bedrock geology includes many lithologies, often classified into three types based on origin: igneous, metamorphic and sedimentary.

The BGS Faults and Rock Segments dataset includes geological faults and thin beds mapped as lines such as coal seams and mineral veins. These are not restricted by age and could relate to features of any of the 1:10,000 geology datasets.

Bedrock and Faults Map - Slice A

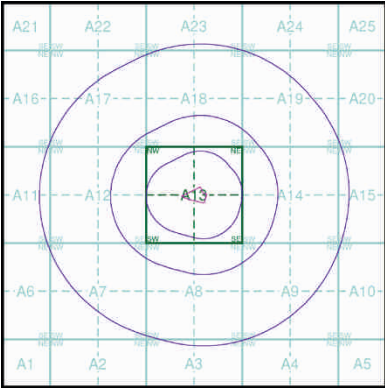

Order Details


Order Number: 173200128_1_1
Customer Ref: 4387
National Grid Reference: 383420, 398370
Slice: A
Site Area (Ha): 1.04
Search Buffer (m): 1000

Site Details

Brother UK Ltd, Bridge House, Bridge Street, AUDENSHAW, M34 5JD



Tel: 0844 844 9952
Fax: 0844 844 9951
Web: www.envirocheck.co.uk

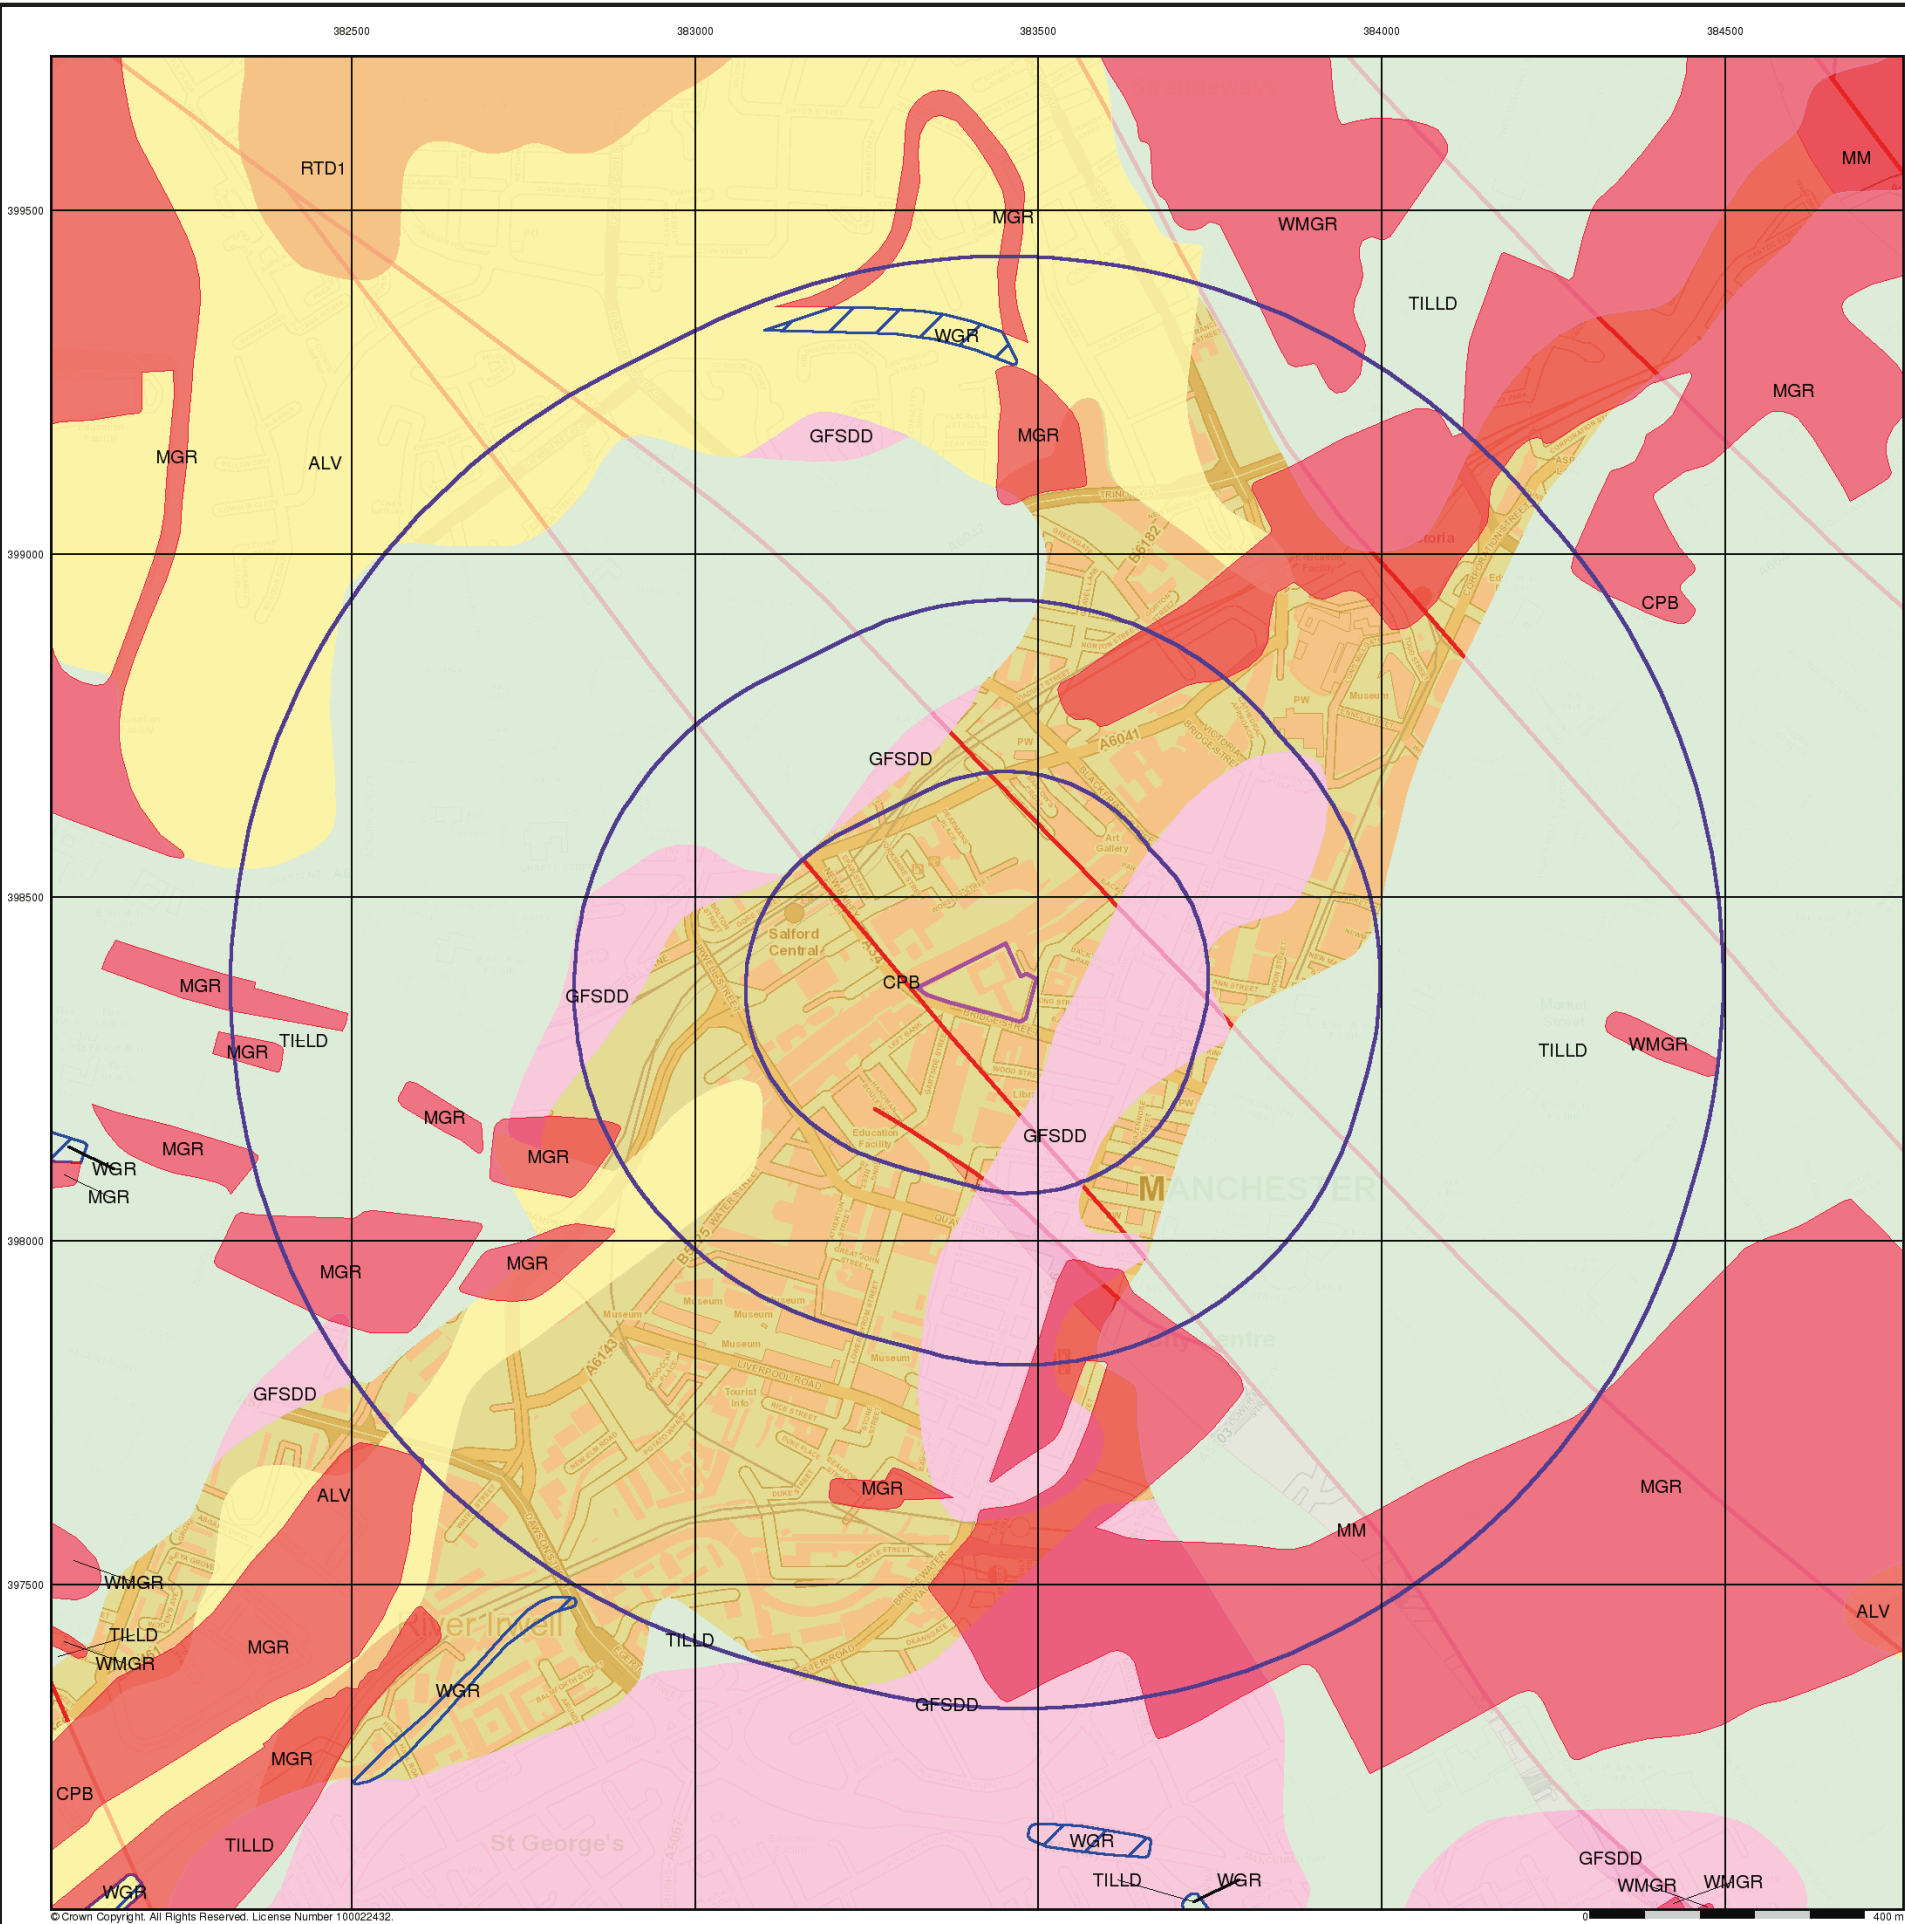

Combined Surface Geology

The Combined Surface Geology map combines all the previous maps into one combined geological overview of your site.

Please consult the legends to the previous maps to interpret the Combined "Surface Geology" map.


Additional Information

More information on 1:10,000 Geological mapping and explanations of rock classifications can be found on the BGS website. Using the LEX Codes in this report, further descriptions of rock types can be obtained by interrogating the 'BGS Lexicon of Named Rock Units'. This database can be accessed by following the 'Information and Data' link on the BGS website.

Contact

British Geological Survey
Kingsley Dunham Centre
Keyworth
Nottingham
NG12 5GG
Telephone: 0115 936 3143
Fax: 0115 936 3276
email: enquiries@bgs.ac.uk
website: www.bgs.ac.uk

Combined Geology Map - Slice A

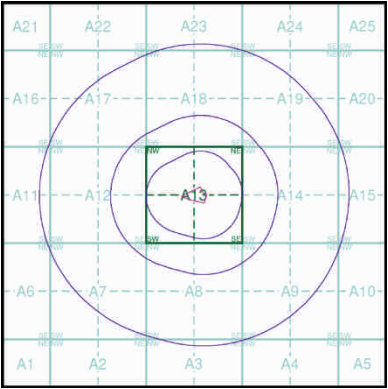

Order Details

Order Number: 173200128_1_1
Customer Ref: 4387
National Grid Reference: 383420, 398370
Slice: A
Site Area (Ha): 1.04
Search Buffer (m): 1000

Site Details

Brother UK Ltd, Bridge House, Bridge Street, AUDENSHAW, M34 5JD



Tel: 0844 844 9952
Fax: 0844 844 9951
Web: www.envirocheck.co.uk