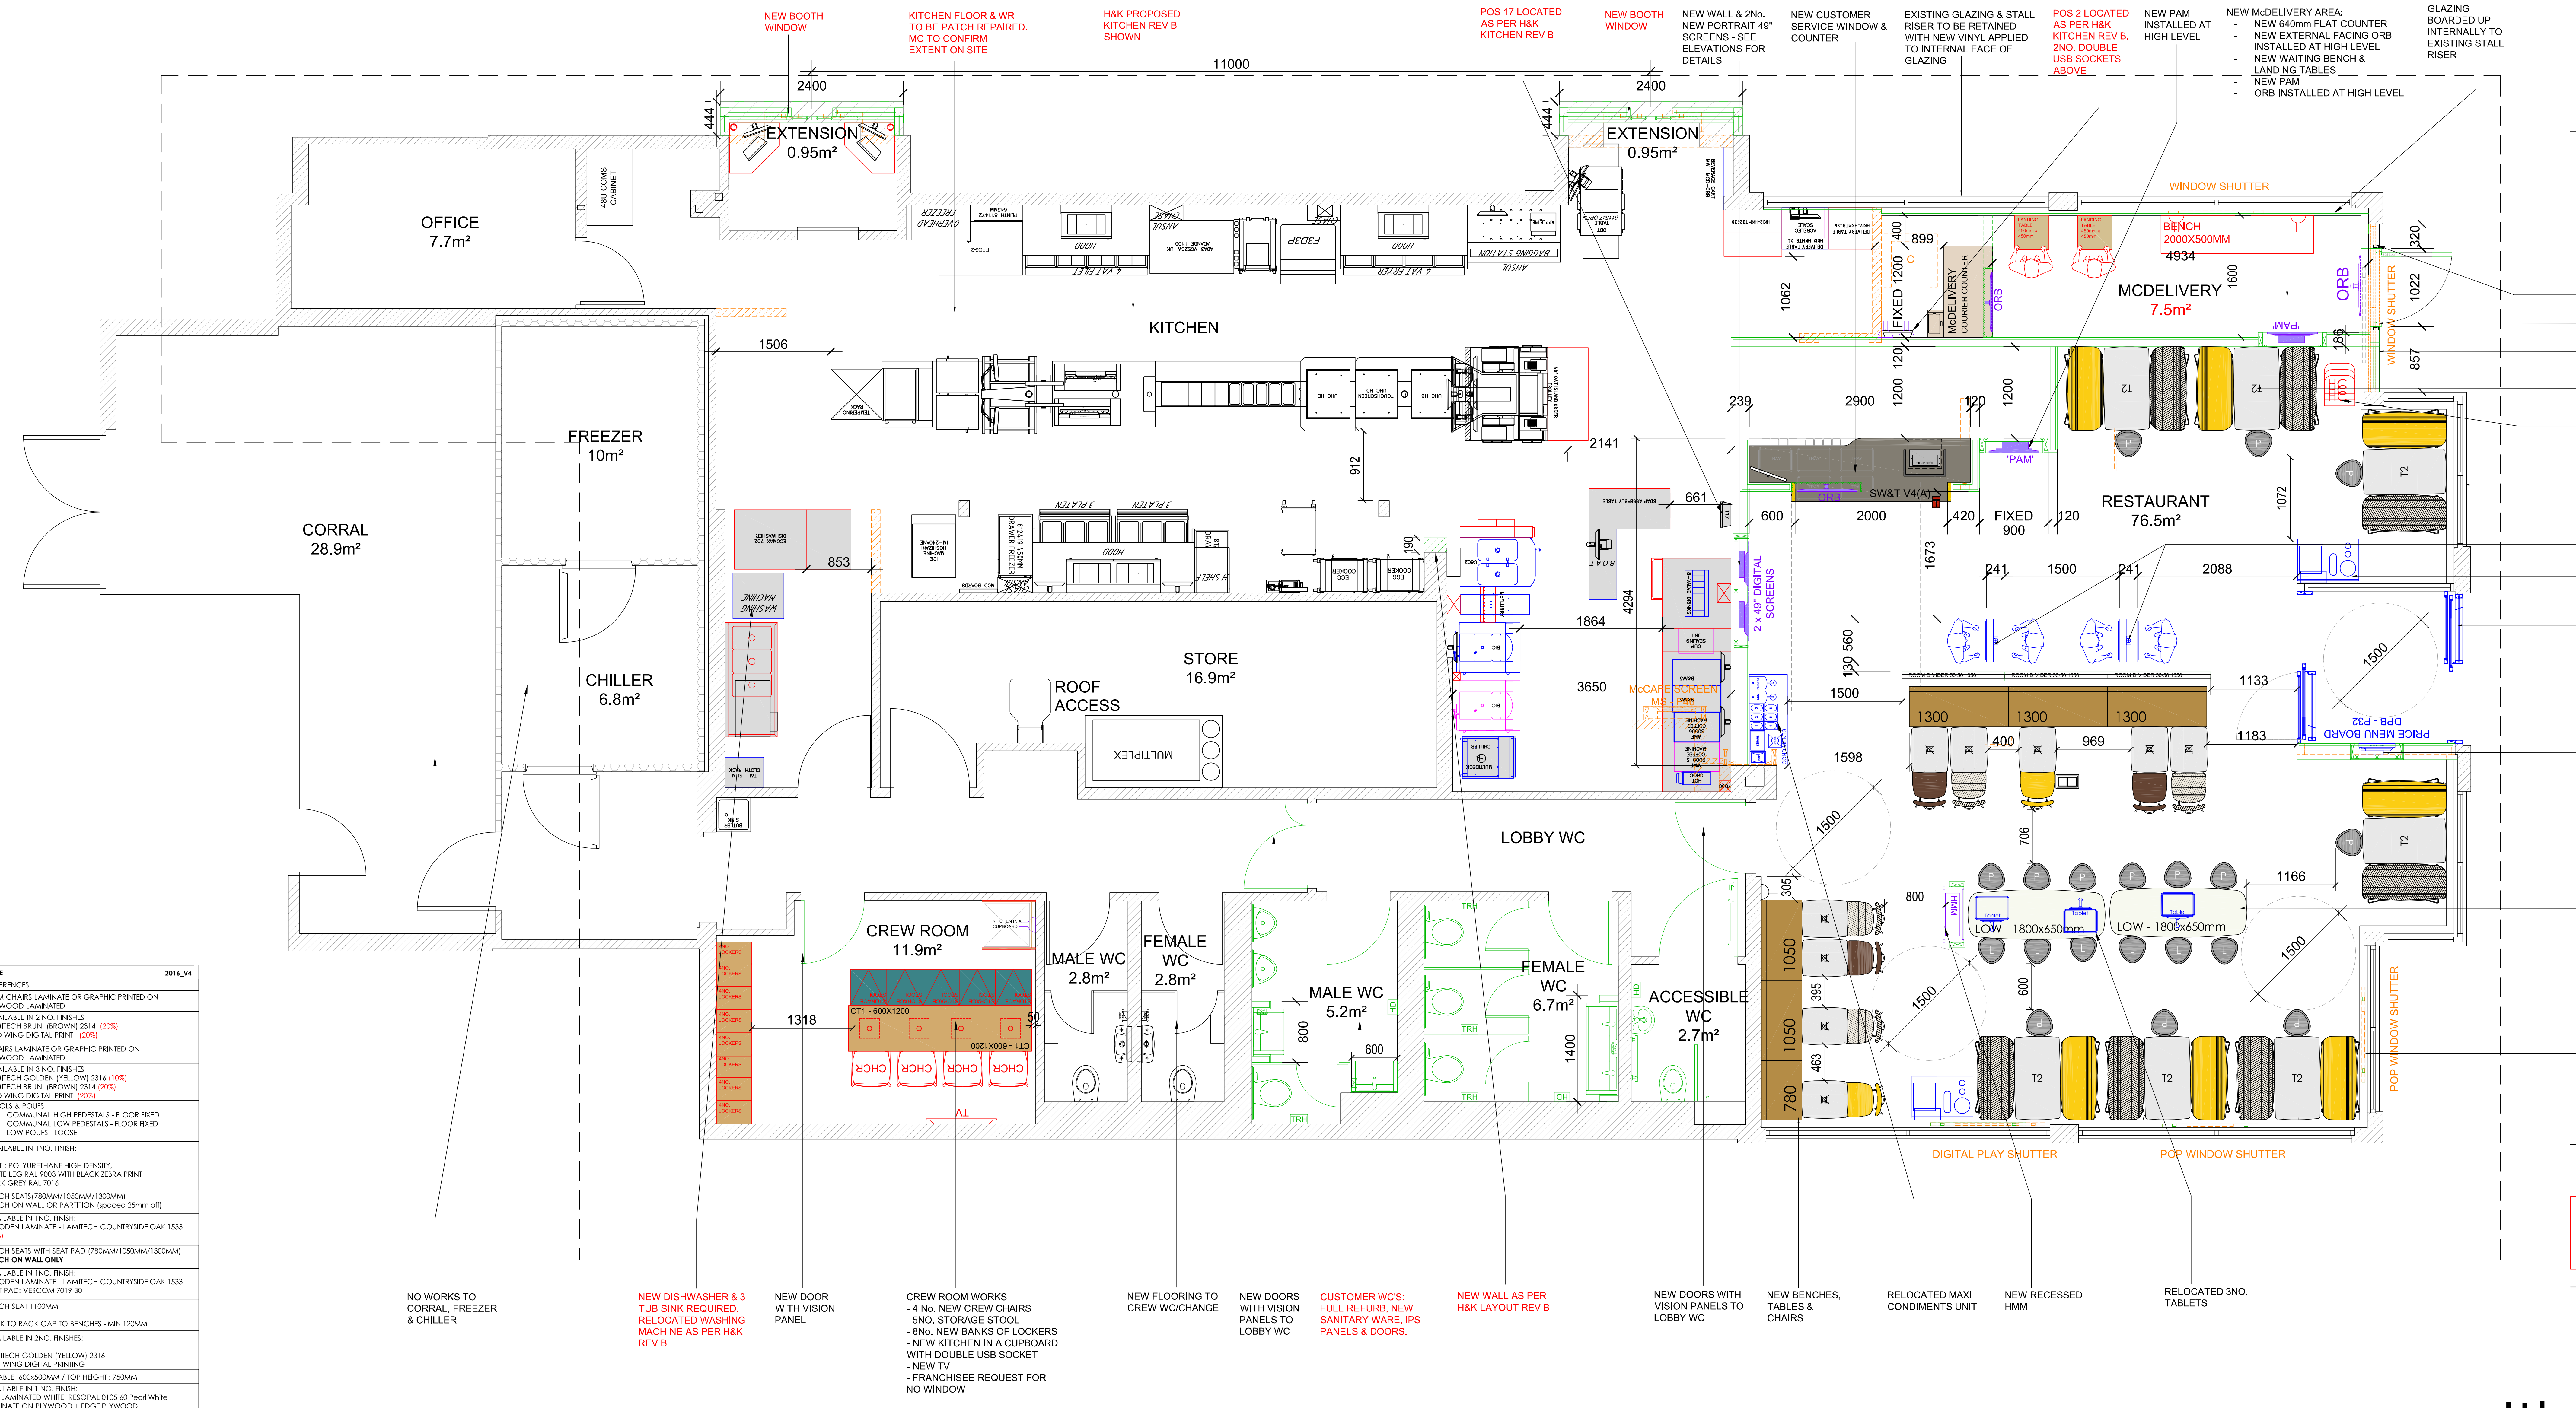
NEW BOOTH WINDOW
KITCHEN FLOOR & WR TO BE PATCH REPAIRED. MC TO CONFIRM EXTENT ON SITE
H&K PROPOSED KITCHEN REV B SHOWN
POS 17 LOCATED AS PER H&K KITCHEN REV B
NEW BOOTH WINDOW
NEW WALL & 2No. NEW PORTRAIT 49" SCREENS - SEE ELEVATIONS FOR DETAILS
NEW CUSTOMER SERVICE WINDOW & COUNTER
EXISTING GLAZING & STALL RISER TO BE RETAINED WITH NEW VINYL APPLIED TO INTERNAL FACE OF GLAZING
POS 2 LOCATED AS PER H&K KITCHEN REV B. 2NO. DOUBLE USB SOCKETS ABOVE
NEW PAM INSTALLED AT HIGH LEVEL
NEW McDELIVERY AREA:
- NEW 640mm FLAT COUNTER
- NEW EXTERNAL FACING ORB INSTALLED AT HIGH LEVEL
- NEW WAITING BENCH & LANDING TABLES
- NEW PAM
- ORB INSTALLED AT HIGH LEVEL
GLAZING BOARDED UP INTERNALLY TO EXISTING STALL RISER
11000
2400
444
2400
444
EXTENSION 0.95m²
EXTENSION 0.95m²
OFFICE 7.7m²
48U COMS CABINET
KITCHEN
1506
FREEZER 10m²
CORRAL 28.9m²
CHILLER 6.8m²
853
912
2141
661
190
1864
4294
3650
STORE 16.9m²
ROOF ACCESS
MULTIPLEX
LOBBY WC
CREW ROOM 11.9m²
CT1 - 600X1200
CT2 - 600X1200
CHCR
1318
50
TV
MALE WC 2.8m²
FEMALE WC 2.8m²
MALE WC 5.2m²
800
600
FEMALE WC 6.7m²
1400
ACCESSIBLE WC 2.7m²
WINDOW SHUTTER
BENCH 2000X500MM
4934
899
400
1062
1200
FIXED 1200
120
MCDELIVERY COURIER COUNTER
ORB
MCDELIVERY 7.5m²
1600
1022
320
857
186
'PAM'
T2
239
2900
1200
120
'PAM'
SW&T V4(A)
ORB
600
2000
420
FIXED 900
120
RESTAURANT 76.5m²
1072
1673
241
1500
241
2088
2 x 49" DIGITAL SCREENS
130 560
1500
1500
1133
1183
PRICE MENU BOARD DPB - P32
1300
1300
1300
400
969
1598
1500
706
800
LOW - 1800x650mm
LOW - 1800x650mm
1166
1500
1500
600
305
1050
395
1050
463
780
HMM
T2
DIGITAL PLAY SHUTTER
POP WINDOW SHUTTER
POP WINDOW SHUTTER
NEW SPANDREL PANEL TO EXISTING STALL RISER
NEW McDELIVERY DOOR
NEW GLAZING TO EXISTING STALL RISER
NEW BOOTH SEATS & STOOLS
1No. NEW 3 STACK HIGH CHAIRS
GLAZING FRAMES TO BE REDECORATED GREY RAL 7022 INTERNALLY ONLY
2NO. RELOCATED SOK'S & NEW SCREENS 2NO. RELOCATED MINI RECYCLING UNIT
RELOCATED DOORS & GLAZING. SPECIALIST TO ADVISE
NEW WALL & RELOCATED PRICE MENU BOARD
NEW LOW COMMUNAL TABLE & LOOSE STOOLS
NEW WINDOW SHUTTERS
NO WORKS TO CORRAL, FREEZER & CHILLER
NEW DISHWASHER & 3 TUB SINK REQUIRED. RELOCATED WASHING MACHINE AS PER H&K REV B
NEW DOOR WITH VISION PANEL
CREW ROOM WORKS
- 4 No. NEW CREW CHAIRS
- 5NO. STORAGE STOOL
- 8No. NEW BANKS OF LOCKERS
- NEW KITCHEN IN A CUPBOARD WITH DOUBLE USB SOCKET
- NEW TV
- FRANCHISEE REQUEST FOR NO WINDOW
NEW FLOORING TO CREW WC/CHANGE
NEW DOORS WITH VISION PANELS TO LOBBY WC
CUSTOMER WC'S: FULL REFURB, NEW SANITARY WARE, IPS PANELS & DOORS.
NEW WALL AS PER H&K LAYOUT REV B
NEW DOORS WITH VISION PANELS TO LOBBY WC
NEW BENCHES, TABLES & CHAIRS
RELOCATED MAXI CONDIMENTS UNIT
NEW RECESSED HMM
RELOCATED 3NO. TABLETS

PROPOSED GENERAL ARRANGEMENT PLAN 1:50

ALPHABET - FURNITURE	2016_V4
SYMBOLS	REFERENCES
	ARM CHAIRS LAMINATE OR GRAPHIC PRINTED ON PLYWOOD LAMINATED
	AVAILABLE IN 2 NO. FINISHES LAMITECH BRUN (BROWN) 2314 (20%) BIRD WING DIGITAL PRINT (20%)
	CHAIRS LAMINATE OR GRAPHIC PRINTED ON PLYWOOD LAMINATED
	AVAILABLE IN 3 NO. FINISHES LAMITECH GOLDEN (YELLOW) 2316 (10%) LAMITECH BRUN (BROWN) 2314 (20%) BIRD WING DIGITAL PRINT (20%)
H L P	STOOLS & POUFS (H) COMMUNAL HIGH PEDESTALS - FLOOR FIXED (L) COMMUNAL LOW PEDESTALS - FLOOR FIXED (P) LOW POUFS - LOOSE
	AVAILABLE IN 1NO. FINISH: SEAT : POLYURETHANE HIGH DENSITY, WHITE LEG RAL 9003 WITH BLACK ZEBRA PRINT DARK GREY RAL 7016
1300 1050 780	BENCH SEATS(780MM/1050MM/1300MM) BENCH ON WALL OR PARTITION (spaced 25mm off)
	AVAILABLE IN 1NO. FINISH: WOODEN LAMINATE - LAMITECH COUNTRYSIDE OAK 1533 (40%)
1300 1050 780	BENCH SEATS WITH SEAT PAD (780MM/1050MM/1300MM) **BENCH ON WALL ONLY**
	AVAILABLE IN 1NO. FINISH: WOODEN LAMINATE - LAMITECH COUNTRYSIDE OAK 1533 SEAT PAD: VESCOM 7019-30
	BENCH SEAT 1100MM BACK TO BACK GAP TO BENCHES - MIN 120MM
	AVAILABLE IN 2NO. FINISHES: LAMITECH GOLDEN (YELLOW) 2316 BIRD WING DIGITAL PRINTING
	T1 TABLE 600x500MM / TOP HEIGHT : 750MM
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
	T2 TABLE 1100x600MM / TOP HEIGHT : 750MM
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
	PARTITION STANDUP 4
	TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC FIN WALLS: COUNTRYSIDE OAK PARTITIONS SHOULD BE USED IN FRONT OF A BLACK TILED WALL. DARK BROWN PARTITIONS SHOULD BE USED IN FRONT OF COUNTRYSIDE OAK WALLS
	PARTITION STANDUP 2
	TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC FIN WALLS: COUNTRYSIDE OAK PARTITIONS SHOULD BE USED IN FRONT OF A BLACK TILED WALL. DARK BROWN PARTITIONS SHOULD BE USED IN FRONT OF COUNTRYSIDE OAK WALLS
	MAGIC TABLE
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
MAGIC TABLE	MAGIC TABLE (FINS ONLY TO USED WHEN TABLE IS THE ONLY ONE)
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
	COMMUNAL TABLE (2400/3000MM)
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC

	SIT UP (LOW 750mm/ HIGH 1100mm)
	AVAILABLE IN 1 NO. FINISH: TOP LAMINATED WHITE RESOPAL 0105-60 Pearl White LAMINATE ON PLYWOOD + EDGE PLYWOOD EXPOSED / STEEL LEG WITH GRAPHIC
MMM'S 1200mm MMM'S 1800mm MMM'S 2400mm MMM'S 3000mm	FEATURE MMM'S SIT-UP TABLE (1100mm HIGH) WITH SOLID PLYWOOD EDGES IN 5NO. SIZES: 1200X500mm (2NO. STOOLS) 1800x500mm (3NO. STOOLS) 2400x500mm (4NO. STOOLS) 3000X500mm (5NO. STOOLS) **POWER REQUIRED FOR FEATURE LIGHTING**
	AVAILABLE IN 1NO. FINISH: WHITE - CORIAN GLACIER WHITE
ROOM DIVIDER 750	PARTITIONS: FRAME PARTITION (1350mm/1100mm): LOW WALL/ PICTURE FRAMES ABOVE ROOM DIVIDER 50/50 (1350mm/1100mm): LOW WALL/ GLASS ABOVE WITH DECALS ROOM DIVIDER (750mm): FULL HEIGHT GLASS WITH DECALS

2021 CREW ROOM - N.I GREEN	2022_V3
FURNITURE SCHEDULE	
CHCR	**STAFF CHAIR** CHROME FRAME WITH WHITE POLYPROPYLENE SEAT SUPPLIED BY DISPLAY WORLD
HSCR	**HIGH STOOL** CHROME FRAME WITH WHITE POLPROPYLENE SEAT SUPPLIED BY DISPLAY WORLD
	TABLE 1200 x 600mm POWDER COATED BLACK PEDESTAL CT1 TABLE TOP FINISHED IN FORMICA LAMINATE NEVADA OAK F8588 **TABLE 600 x 600mm** POWDER COATED BLACK PEDESTAL CT2 TABLE TOP FINISHED IN FORMICA LAMINATE NEVADA OAK F8588 SUPPLIED BY DISPLAY WORLD.
PCU	**PC UNIT** BLACK FRAME WITH M10 CONUNTERSUNK HOLES, WHITE LAMINATE WORK TOP WITH DOLKEN EDGING 650 L x 400 D x 1000 H SUPPLIED BY DISPLAY WORLD
10NO. LOCKERS 4NO. LOCKERS	**HELMSMAN LOCKERS** BANKS OF 4 STANDARD OR 10 WALLET LOCKETS AVAILABLE WITH OR WITHOUT USB CHARGING DOOR FINISH IN FORMICA COMPACT - RANDOM PATTERN TO MATCH VISUAL 1. FORMICA - F7879 DUSTY JADE 2. FORMICA - F2255 POLAR WHITE

STORAGE STOOL	**STORAGE STOOL** TOP OF STOOL UPHOLSTERED SEAT PAD - JEMO 7044.04 - VESCOM STOOL BASE FORMICA LAMINATE NEVADA OAK F8588 SUPPLIED BY DISPLAY WORLD
BENCH 1200X500MM	**SIMPLE BENCH** TOP OF STOOL UPHOLSTERED SEAT PAD - JEMO 7044.04 - VESCOM BENCH LEGS IN FORMICA LAMINATE NEVADA OAK F8588 SUPPLIED BY DISPLAY WORLD - TO BE SIGNED OFF BY NW
KITCHEN IN A CUPBOARD	**KITCHEN IN A CUPBOARD** FINISHED IN FORMICA LAMINATE NEVADA OAK F8588

MARKETING ELEMENTS	2022_V5
PRICE MENU	DIGITAL PRICE BOARD - 32" DPB-P32
DIGITAL WINDOW POSTER	DIGITAL WINDOW POSTER (INSTORE) - 46" EXTERIOR FACING - DWP EX-P46 INTERIOR FACING - DWP IN-P46
ORB	ORDER READY BOARD- 32" ORB-L32
	DOUBLED SIDE SELF ORDER KIOSK (SOK) SINGLE SIDED SELF ORDER KIOSK (SOK)
	AIRCHARGE MOBILE PHONE CHARGING SOLUTION
TABLET	TABLET TABLE. 700mm SCREEN IN SCHEME SPECIFIC LAMINATE IF POWER/DATA CANT BE ACCESSED THROUGH FLOOR.

COLOUR REFERENCE	
🟥	NEW EQUIPMENT/FURNITURE (OR INDICATED BY COLOURED HATCH)
■	EXISTING/FURNITURE EQUIPMENT
🟦	RELOCATED/FURNITURE EQUIPMENT
🟪	FUTURE/OPTIONAL EQUIPMENT
🟪	MERCHANDISING EQUIPMENT
🟩	NEW CONSTRUCTION
- - -	EXISTING STRUCTURE TO BE REMOVED
- - -	EXISTING 30 MINUTE FIRE RATE WALL
- - -	EXISTING 60 MINUTE FIRE RATE WALL
- - -	PROPOSED 30 MINUTE FIRE RATE WALL
- - -	PROPOSED 60 MINUTE FIRE RATE WALL

REVISION NOTES	
REV	DESCRIPTION
B1	Show cloth rack here.
B2	Relocate multideck as per sticky note and move the drinks into this corner.
B3	Relocate T17 as per sticky note and show multideck here.
B4	Move all equipment, sink WM, DW down to this nib wall and relocate cloth rack as per sticky Note.
B5	Show T17 here please.
B6	Move BOAT/BDAP up accordingly once drinks has been relocate.

C 27/10/22 AL MW
UPDATED FOLLOWING STAGE 1 MEETING NOTES 07/10/22
- H&K PROPOSED KITCHEN REV B SHOWN
- NEW BOOTH WINDOWS
- NEW SPANDREL PANEL TO MCDELIVERY
- FULL REFURB TO CUSTOMER WC'S & ACCESSIBLE WC

NOTE:
- FRANCHISEE REQUEST FOR NO AIRCHARGE/ MAGIC TABLE
- NEW FACEPLATES REQUIRED TO ALL EXISTING SOCKETS

AREAS SCHEDULE	EXISTING	PROPOSED
TOTAL COVERS	77	65
DINING AREA INTERNAL AREA (m²)	97.6m²	76.5m²
WC INTERNAL AREA (m²)	14.6m²	14.6m²
CREW ROOM INTERNAL AREA (m²)	11.9m²	11.9m²

DRAWINGS BASED ON:
AS BUILT - 6270_AEW_1201_0050_E
PROPOSED H&K: DIN-XXXX UK 1201 HEATON CHAPEL - GBR - COTF-REV B

ALPHABET
COTF & REIMAGE

NOTES

- All dimensions and levels are to be checked on site.
- Any discrepancies are to be reported to the architect before any work commences.
- This drawing shall not be scaled to ascertain any dimensions. Work to figured dims only.
- This drawing shall not be reproduced without express written permission from AEW.
- Title overlay drawings and ownership boundaries are produced using all reasonable endeavours. AEW cannot be responsible for the accuracy or scale discrepancy of base plans supplied to them.
- All works are to be undertaken in accordance with Building Regulations and the latest British Standards.
- All proprietary materials and products are to be used strictly in accordance with the manufacturers recommendations.

CDM 2015

Client notified of duties: **At Design Workshops**
Principal Designer: **CSS**

Unless noted below, all known hazards have been highlighted on the drawing:

Notes:
All drawings to be read in conjunction with all other drawings as noted on issue sheet.

B 06/10/22 AL MW
MCDELIVERY AREA UPDATED

DESIGN WORKING GROUP
APPROVED

A 28/09/22 AL MW
UPDATED FOLLOWING DWG COMMENTS RECEIVED 20/09 & MC EMAIL 27/09
- DIGITAL SCREENS REPOSITIONED
- NEW PRESENTER BOOTHS OMITTED
- DWG APPROVED STAMP ADDED

- 06/09/22 AL MW
INITIAL ISSUE

REV Date Drawn by: - Checked by: -

Status: **S2**
Purpose of Issue: **For Information**
drawing stage: **Stage 1**
client: **McDonald's Restaurants Ltd**
project: **HEATON CHAPEL MANCHESTER**
store: **1201**
drawing title: **PROPOSED GA PLAN COTF**
date: **06/09/22**
drawn: **AL**
scale@A1: **1:50**
checked: **MW**

aew architects
0161 214 4370
www.aewarchitects.com

Job No: **12995_AEW_1201_0050**
Rev: **C**