



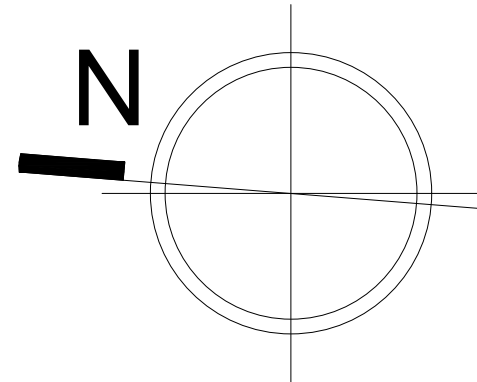

1. DO NOT SCALE FROM THIS DRAWING - USE FIGURED DIMENSIONS ONLY.
2. READ IN CONJUNCTION WITH ALL OTHER CONSULTANTS / SPECIALISTS DRAWINGS, REPORT ANY DISCREPANCIES BEFORE AFFECTED WORK COMMENCES.
3. ALL SETTING OUT DIMENSIONS TO BE CHECKED ON SITE BY CONTRACTOR BEFORE WORK COMMENCES.
4. THIS DRAWING REMAINS COPYRIGHT OF KEP CZYK PEARCE SANDERSON LTD. COPY / DISTRIBUTE ONLY WITH CONSENT OF THE AUTHOR.

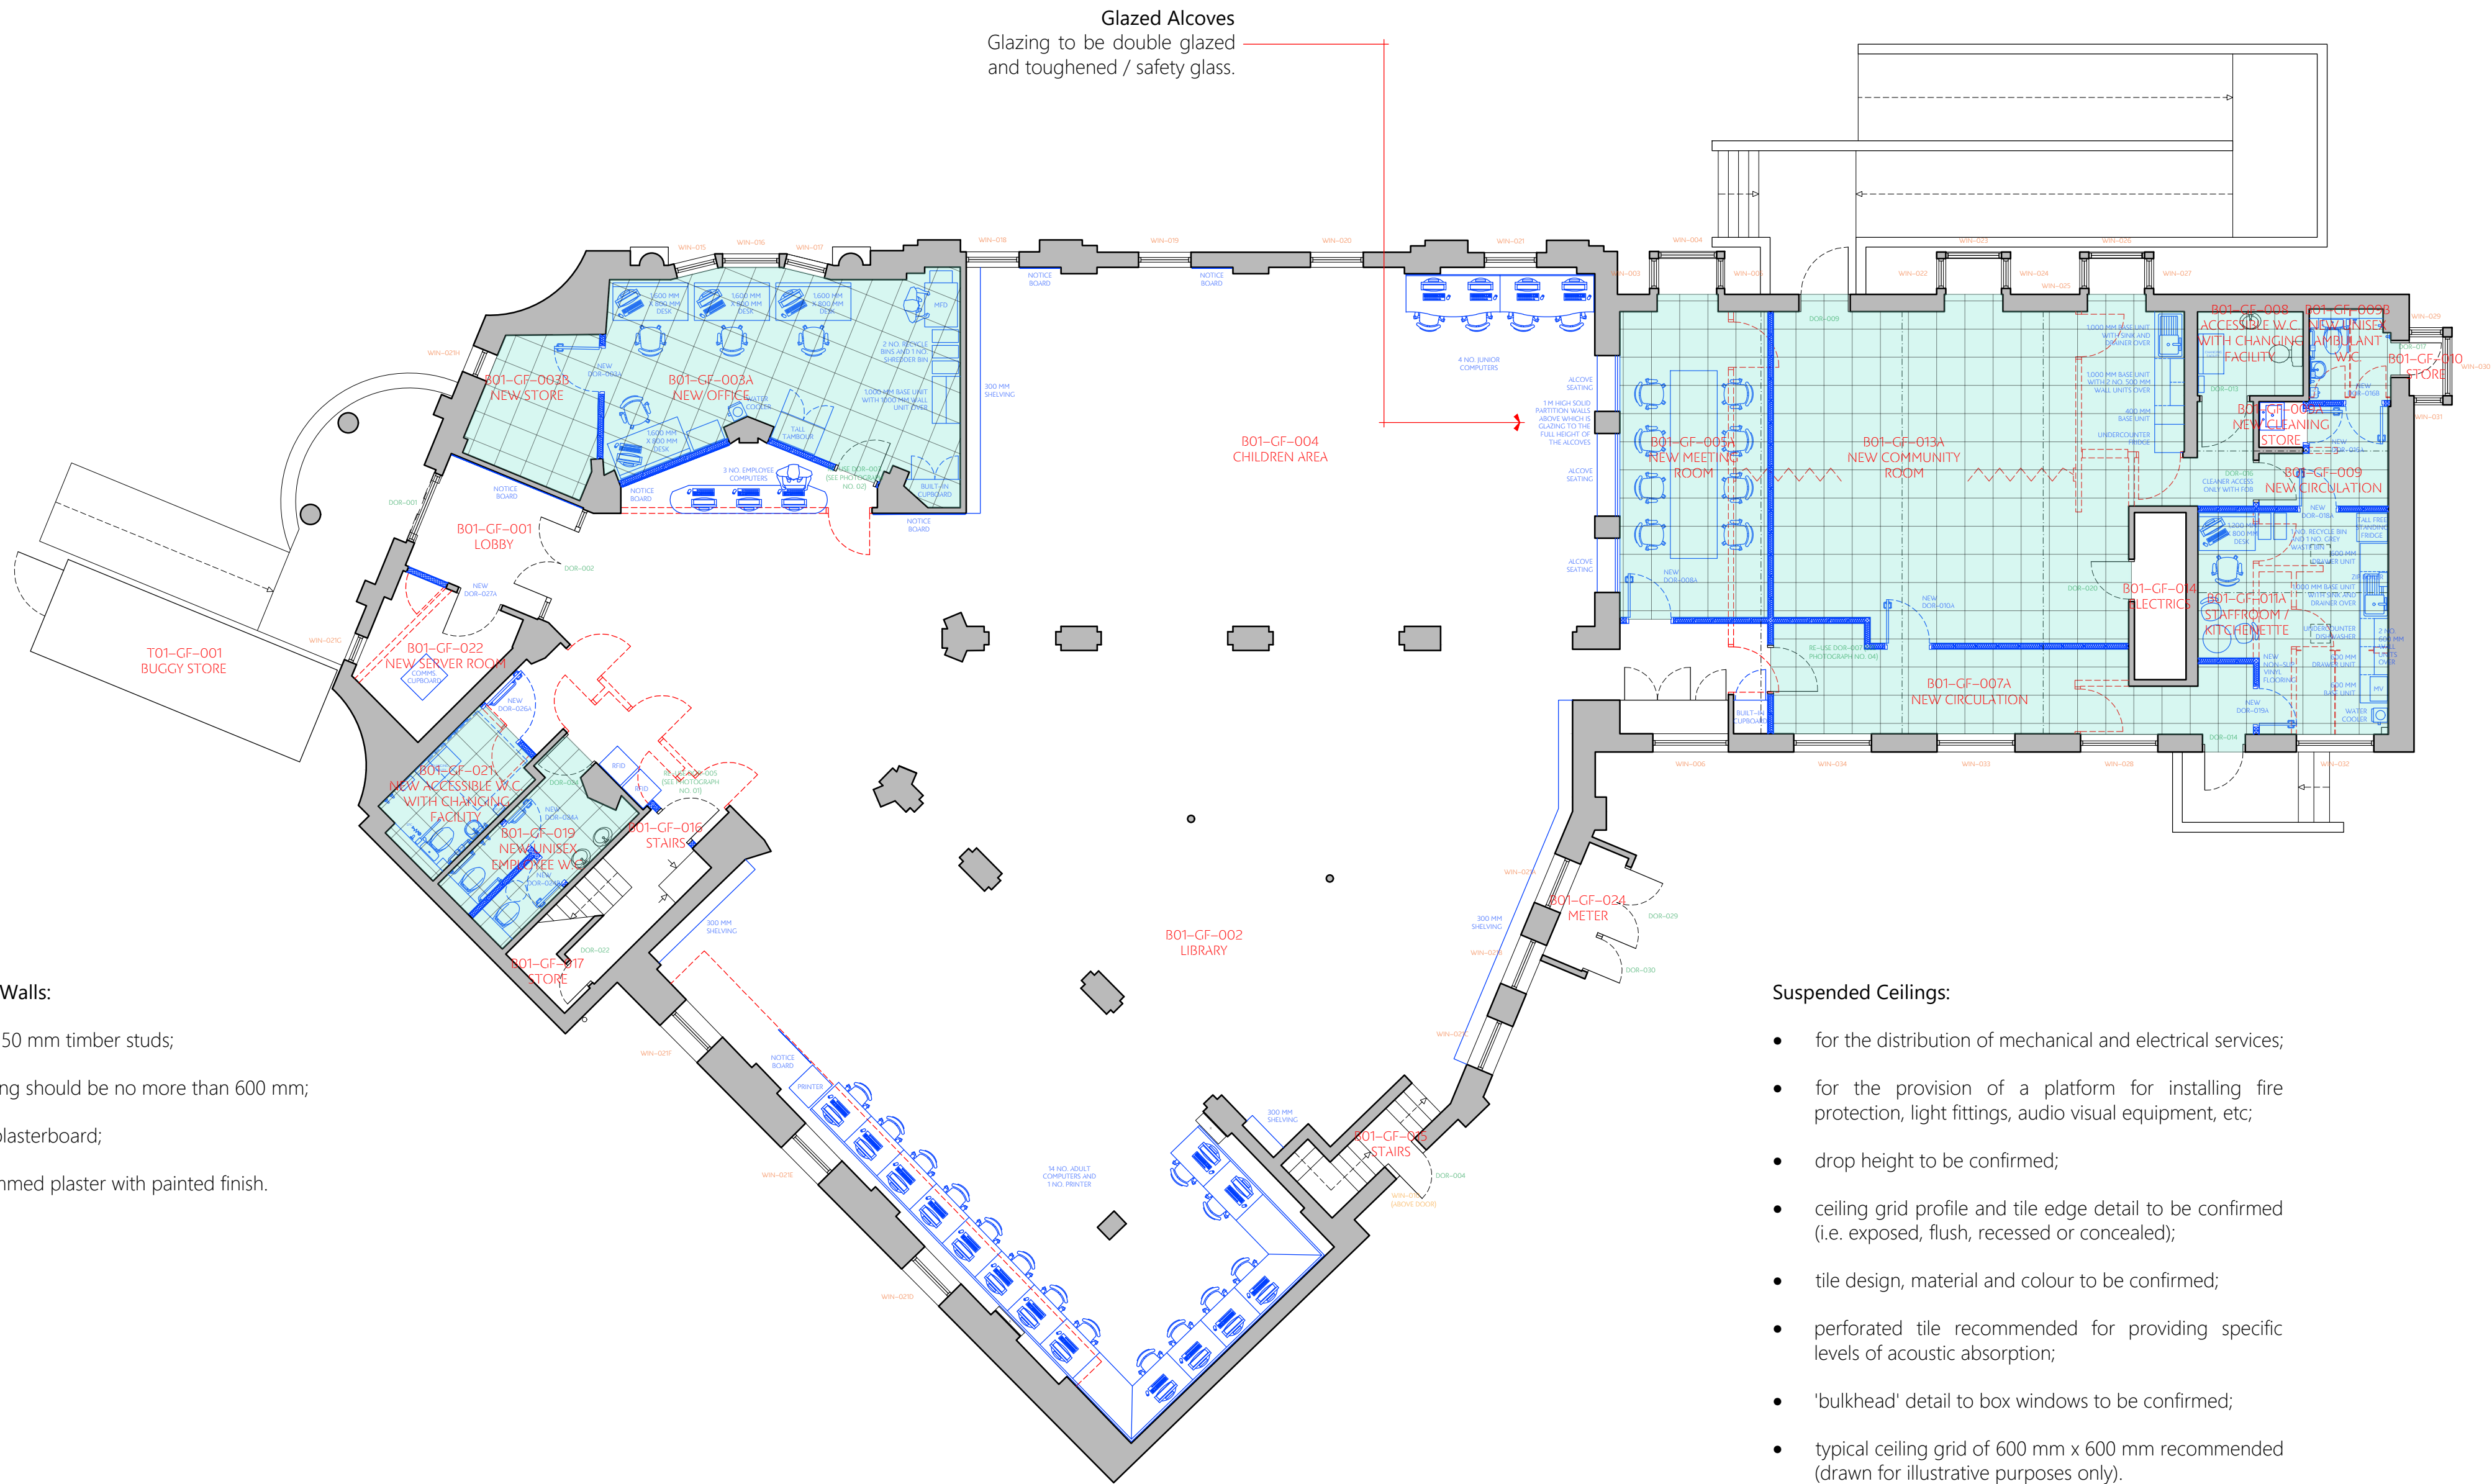

Stud Partition Walls:

- 100 mm x 50 mm timber studs;
- stud spacing should be no more than 600 mm;
- 12.5 mm plasterboard;
- 3 mm skimmed plaster with painted finish.

Suspended Ceilings:

- for the distribution of mechanical and electrical services;
- for the provision of a platform for installing fire protection, light fittings, audio visual equipment, etc;
- drop height to be confirmed;
- ceiling grid profile and tile edge detail to be confirmed (i.e. exposed, flush, recessed or concealed);
- tile design, material and colour to be confirmed;
- perforated tile recommended for providing specific levels of acoustic absorption;
- 'bulkhead' detail to box windows to be confirmed;
- typical ceiling grid of 600 mm x 600 mm recommended (drawn for illustrative purposes only).

KEY

- SUSPENDED CEILING
- ROOM REFERENCES
- DOOR REFERENCES
- WINDOW REFERENCES
- R RADIATOR
- REMOVALS AS PROPOSED
- NEW WORKS AS PROPOSED

Contract Open Libraries Development		Ceilings and Walls to Ground Floor as Proposed						
Client	Manchester City Council		Contract No.	2141	Drawn	LMC	Drawing No.	FR 021
Building / Structure	Chorlton District Library, Chorlton-cum-Hardy		Date	Jul 2022	Revision	-	Scale	1:100 @ A1
KEPCZYK PEARCE SANDERSON ARCHITECTS, SURVEYORS & HISTORIC BUILDING CONSULTANTS Address: 75 Wilmslow Road, Handforth, Cheshire SK9 3EN Tel: 01625 400103								