


Section View (A-A)

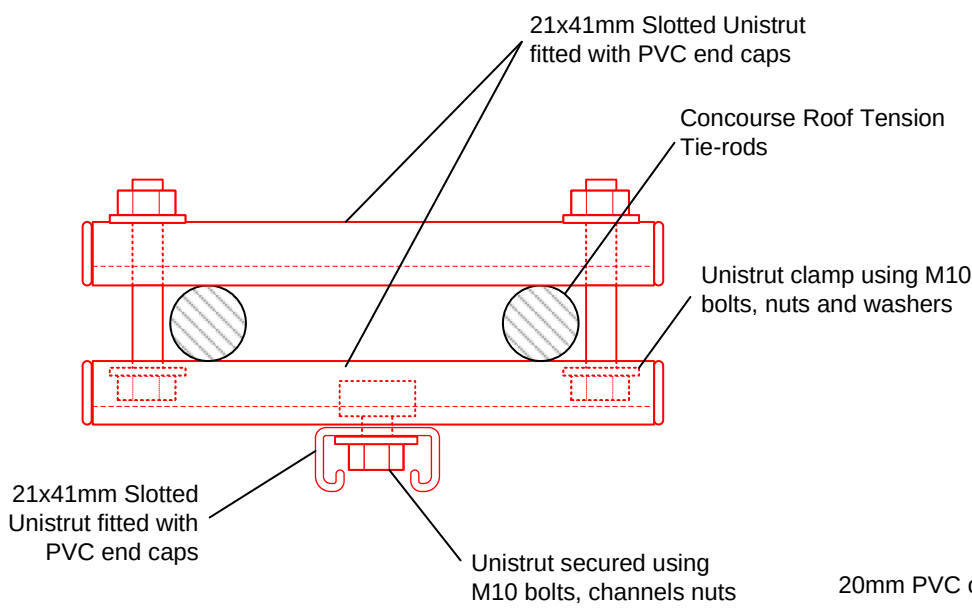

Plan View



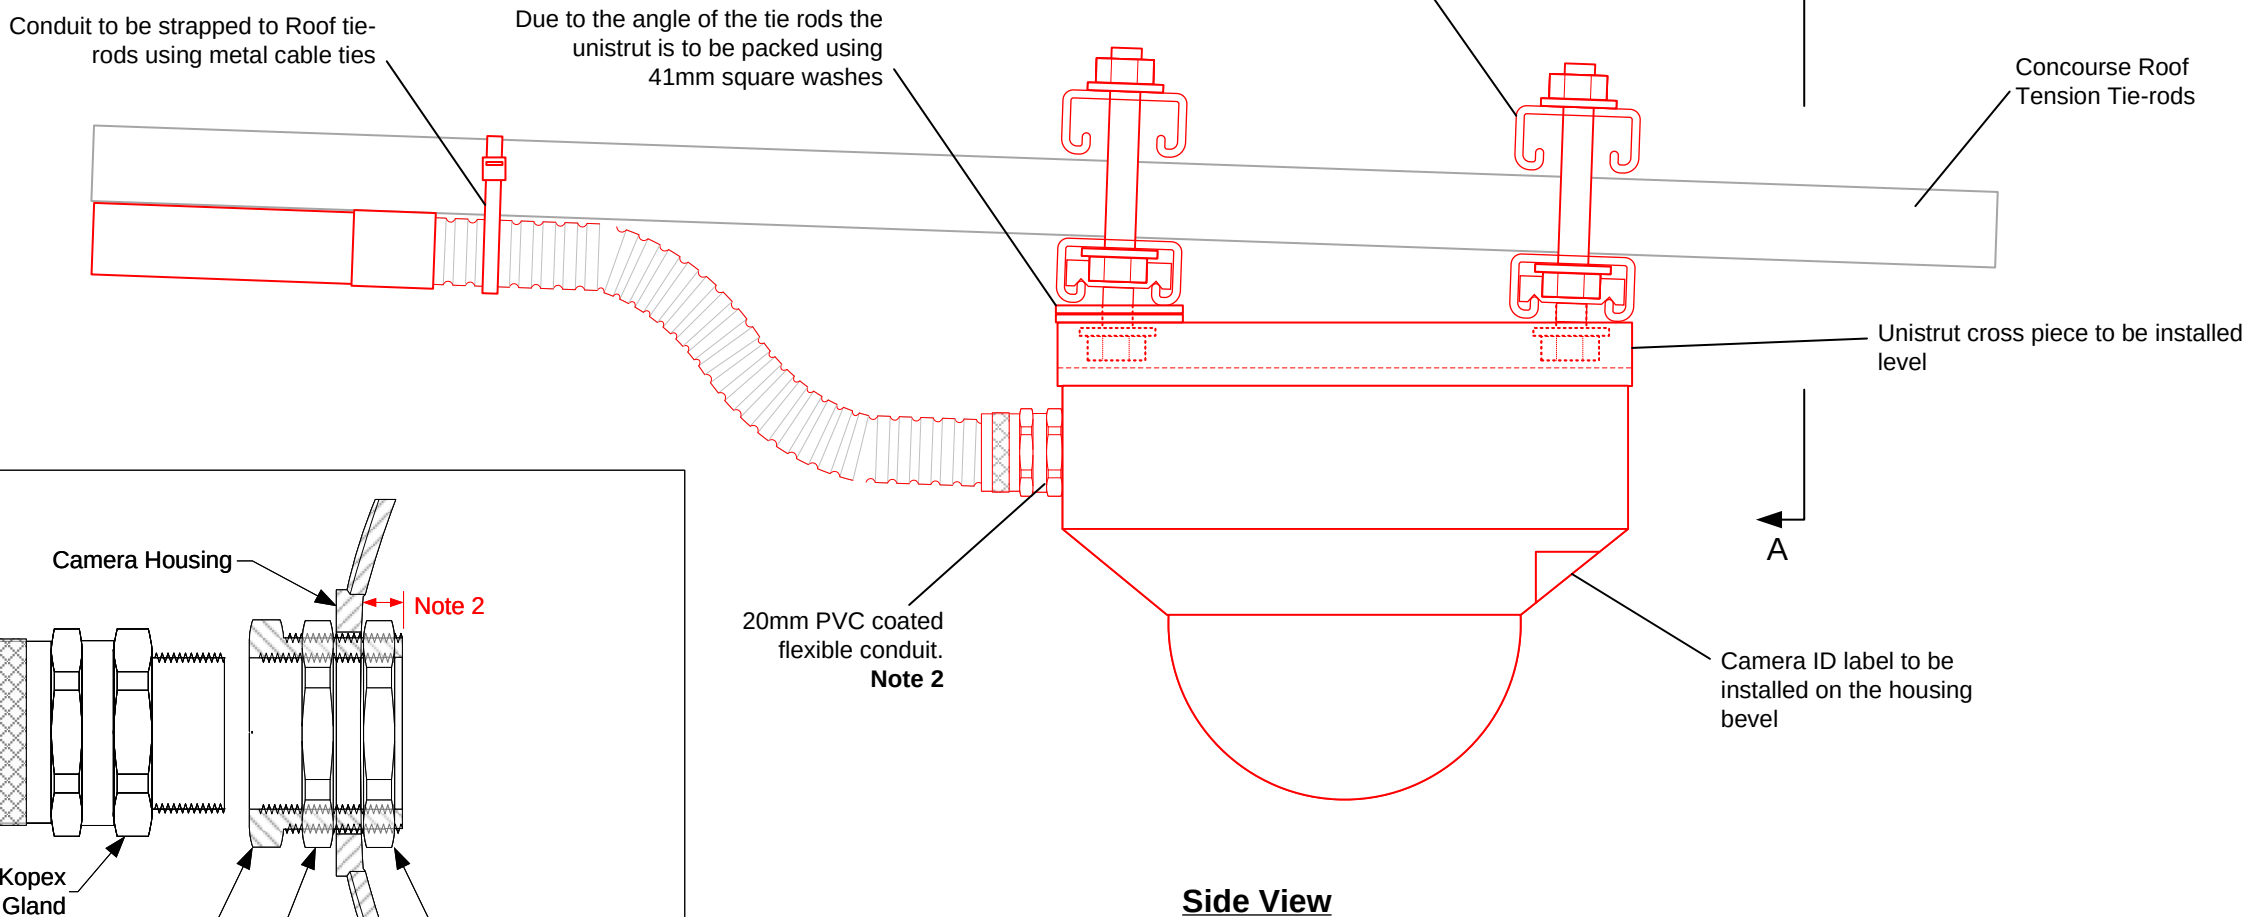


Fig.1

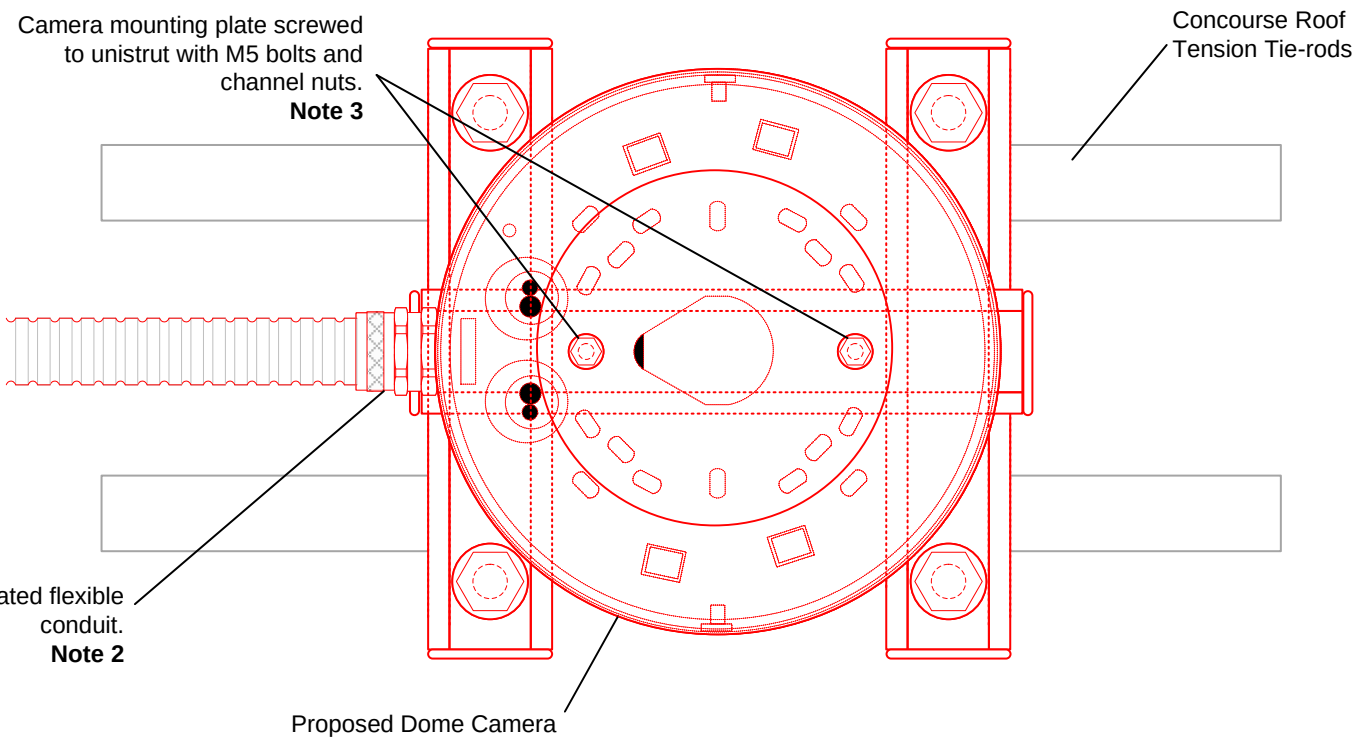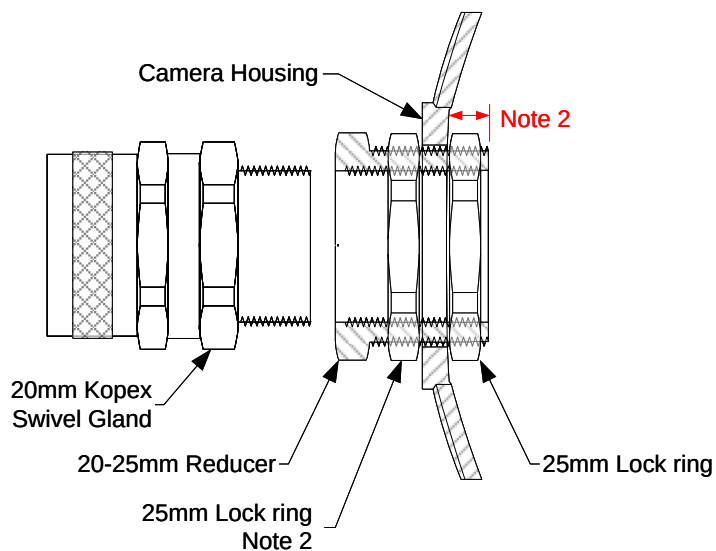

Notes

1. Before mounting the camera, ensure the cable entry is correct orientated to the containment.
2. Within the camera housing there is insufficient clearance for a gland or reducers threads and a lock ring. Therefore a second locking is to be installed on the outside of the housing to ensure no more than 7mm of the reducer protrudes within the housing. See fig.1.
3. The camera mounting plate accommodates M5 bolts. M5 channel nuts are to be used. These are available from Orbital Fasteners (SKU:2240920)

P01	05/05/22	Grip 5 – First Issue		MJ	DF
Rev	Date	Description of Revisions	Drawn	Chkd	Appr
Status					
GRIP 5 – FIRST ISSUE					



Contractor

 **Linbrooke**
People • Technology • Connectivity

Unit 2,3 & 4 Churchill Way
Chapelton
Sheffield
S35 2PY

Project

LINBROOKE GENERIC DRAWINGS

Drawing Title

DOME CAMERA CONCOURSE ROOF TIE-ROD MOUNTING ARRANGEMENT

Designed	M. JAY	Sig		Date	05/05/2022
Drawn	M. JAY	Sig		Date	05/05/2022
Checked	D. FERGUSON	Sig		Date	05/05/2022
Approved	M. SIDDALL	Sig		Date	05/05/2022
Scale		ELR & Mileage			
NTS		N/A			
Linbrooke Drawing Number					Sheet
					1 of 1
Drawing Number					Revision
LBR-GEN-CCTV-027					P01