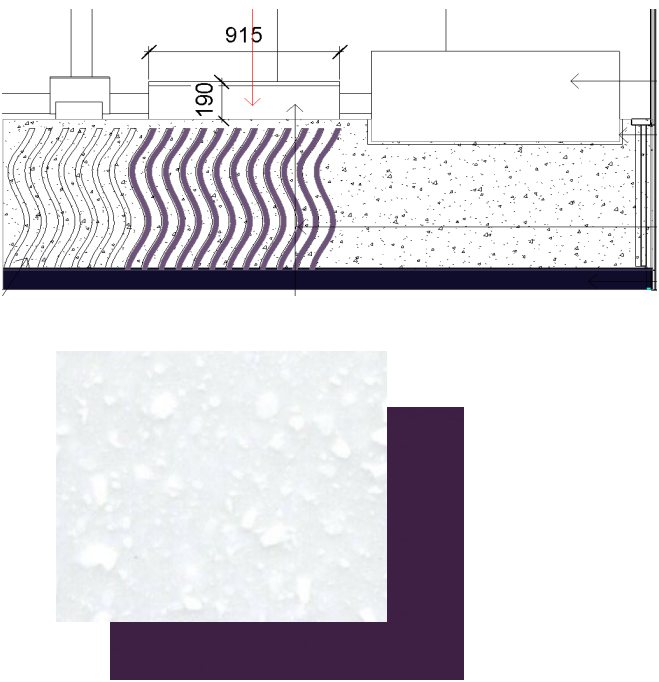
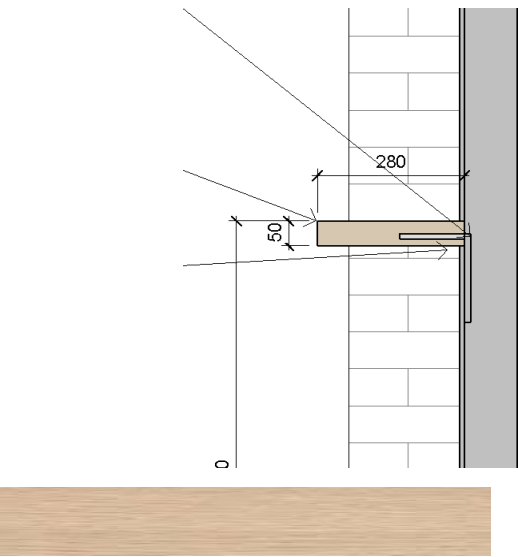
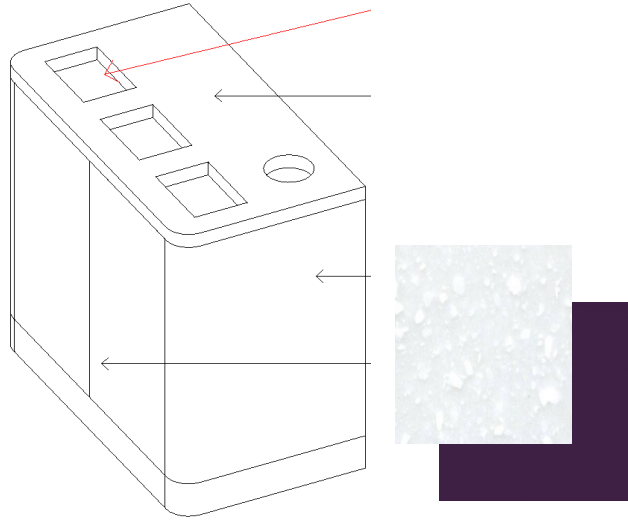


Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/Supplier	Telephone	Specification	Image	Reference	Module	Colour	Notes
J1	Cookie servery Counter	Specialist contractor TBC	N/A	Design to be developed in conjunction with client and joiner. LED LIGHTING to be integrated Counter surface, front and sides - Durasein Triarctic PM4907 - CLIENT TO APPROVE SAMPLE Plinth: Egger Dark Violet - Client to approve sample Undercounter: Egger Dark Violet Refer to equipment schedule for dimensions and specification of: - Cookie display - Ice cream counter - Hot hold - Glass cookie display (bespoke) - Till system - TBC by client All graphic files to be supplied by client to ensure consistency with brand items		Bespoke	Ref. to Drawings	TBA - refer to AWW detailed design drg.	Specialist contractor to carry out site survey, provide samples and working drawings of all design intent for client and AWW comment prior to commencement of manufacture. TEMPLATE ON SITE REQUIRED FOR FINAL SIGN OFF OF DIMS / AGREE SETTING OUT
J2	Back Bar to Cookie servery	Specialist contractor TBC	N/A	Design to be developed in conjunction with client and joiner. Surface: fully stainless steel catering back bar, to accommodate 2no. undercounter glass fronted fridges. Remaining space to be utilised for storage, open shelving and cupboards. Integrated stainless steel sink / wash hand basin. Contractor to provide tap spec for comment / approval. Under counter units front: SS Upstands: SS Plinth: SS shelves: SS Cookie box display: Bespoke joinery item above, J7 Refer to equipment schedule for dimensions and specification of: - Coffee Machine - Cookie box display (Bespoke, J7)	IMAGE INDICATIVE OF FINISH AND STYLE ONLY 	Bespoke	Ref. to Drawings	TBA - refer to AWW detailed design drg.	Specialist contractor to carry out site survey, provide samples and working drawings of all design intent for client and AWW comment prior to commencement of manufacture. Contractor to provide tap specification, for client and AWW approval
J3	Timber poseur shelf	Specialist contractor TBC	N/A	Design to be developed in conjunction with client and joiner. Timber - Solid FSC certified oak, white washed to match tone of flooring [sample to be delivered to joiner for sampling] Shelf to fill alcove, with 30mm gap between end of shelf and external glazing. Concealed metal support bracket within shelf construct to be detailed by joiner, to provide cantilevered support. Fixed back to wall with feature wall cladding (W6) over the top. 20diameter radius to front corners.		Bespoke	Ref. to Drawings	TBA - refer to AWW detailed design drg.	Specialist contractor to carry out site survey, provide samples and working drawings of all design intent for client and AWW comment prior to commencement of manufacture.

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).



Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/Supplier	Telephone	Specification	Image	Reference	Module	Colour	Notes
J4	Recycling & condiments Unit	Specialist contractor TBC	N/A	Design to be developed in conjunction with client and joiner. Surface: Durasein - Triarctic Surround: Egger Dark Violet laminate Exact requirements to be confirmed. Local area recycling guidelines to be reviewed.		Bespoke	Ref. to Drawings	TBA - refer to AWW detailed design drg.	Specialist contractor to carry out site survey, provide samples and working drawings of all design intent for client and AWW comment prior to commencement of manufacture.
J6	BOH kitchenette / Welfare	Specialist contractor TBC		Howdens or similar Greenwich kitchen units with laminate worktop To include 3no 500mm width storage base units including 1no drawer, white matt finish. To include end panels on RH & LHS. Timber effect laminate worktop, square edge. Brushed stainless steel handles. White plinth to match doors. Open section beneath worktop for desk / work station and computer. Power sockets and data outlets coordinated above surface. <u>Coordinate above worktop power for Microwave & desk computer</u> Internal storage cupboards to house adjustable shelving		Bespoke	Ref. to Drawings	TBC	Specialist contractor to carry out site survey, provide samples and working drawings of all design intent for client and AWW comment prior to commencement of manufacture.
J7	Cookie box store	Specialist contractor TBC		Cookie box storage alcove To be recessed within back bar wall, contractor to advise on construction method. Inside faces of recess to be finished in HPL, Egger or similar. Vertical dividing sections to be in HPL laminate finish, Egger or similar. To be fitted to rear, to and bottom on concealed dowel fittings, joiner to advise. W3 tiled finish to be coordinated and fully conceal edges of opening to give fully built in / alcove appearance. Edging strip / detail to be provided by contractor for comment / approval.		Bespoke	Ref. to Drawings	Insomnia Purple	Specialist contractor to carry out site survey, provide samples and working drawings of all design intent for client and AWW comment prior to commencement of manufacture.

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

WALLS AND CEILING FINISHES

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/Supplier	Contact	Specification	Image	Reference	Module	Colour	Notes
C1	Ceilings THROUGHOUT FRONT OF HOUSE	Dulux	n/a	Existing exposed soffit to be retained throughout. Made good where required and decorated. BLACK Contract paint 3 coats minimum		Dulux 00NN 05/000	n/a	BLACK	<i>All surfaces to be smooth and prepped ahead of decorations</i> <i>condition of existing soffit to be reviewed on site.</i> <i>Location and extent of plasterboard bulkhead to be confirmed - refer to AWW reflected ceiling plans.</i> <i>Note: Full coordination of ceilings, services and lighting required.</i>
C1A	Feature ceiling painted colour	Dulux Trade		Feature colour to al high level duct work, see AWW design intent and finishes drawings. Colour to match Pantone 7406C / YELLOW 012 U		Duux ref 42yy 64/745 COLOUR MATCH TO BE REVIEWED ON SITE WITH CLIENT TEAM PRIOR TO COLOUR APPROVAL	N/A	BOLD GOLD	<i>All surfaces to be smooth and prepped ahead of decorations</i>
C2	Plasterboard bulkhead ceilings	Dulux	n/a	Plasterboard bulkhead to be created above counter / food prep area to provide clean work space. Paint - Matt Emulsion BLACK Contract paint 3 coats minimum		nDulux 00NN 05/000	n/a	BLACK	<i>All surfaces to be smooth and prepped ahead of decorations</i> <i>Location and extent of plasterboard bulkhead to be confirmed - refer to AWW reflected ceiling plans.</i> <i>Note: Full coordination of ceilings, services and lighting required.</i>
C3	Ceilings Back of house	www.armstrongceiling.com/	www.armstrongceiling.com/	Hygienic ceiling tile, layin grid. Armstrong Kitchen Zone - sustain ceiling panels			sq 24 " x 24 "	WHITE	<i>To be install in accordance with manufacturers recommendations.</i> <i>Refer to finishes plans for locations.</i>

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

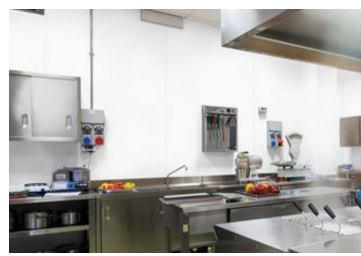
WALLS AND CEILING FINISHES

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/ Supplier	Contact	Specification	Image	Reference	Module	Colour	Notes
W1	Walls THROUGHOUT	All surfaces to be smooth and prepped ahead of decorations.	n/a	Paint - MATT General white, To all walls unless otherwise stated 3 coats minimum, in addition to mist coats where wall is freshly plastered. Where paint is applied directly to blockwork, a suitable masonry paint is required. To match Pantone 663 C / 663 U		To match Pantone 663 C / 663 U	n/a	Twilight White	All surfaces to be smooth and prepped ahead of decorations Refer to finishes plans for all feature finish location Suitability of paint finish for the application of decal graphics to be confirmed by contractor.
W2	Feature Wall Colour	Dulux	n/a	Paint - MATT insomnia Purple feature walls, see AWW wall finishes drawings 3 coats minimum, in addition to mist coats where wall is freshly plastered To match Pantone 2627 C/U		Duux ref 43RB 07/249 COLOUR MATCH TO BE REVIEWED ON SITE WITH CLIENT TEAM PRIOR TO COLOUR APPROVAL	n/a	insomnia Purple	All surfaces to be smooth and prepped ahead of decorations Refer to finishes plans for all feature finish location NOTE - All surfaces featuring W2 feature colours should be plasterboard lined and skimmed accordingly prior to painted finish.
W2A	Feature Wall Colour	Dulux		Paint - MATT Awake Purple feature walls, see AWW wall finishes drawings 3 coats minimum, in addition to mist coats where wall is freshly plastered To match Pantone 513 C/248 U		DULUX MATCH NOT FOUND - CONTRACTOR TO MATCH TO PANTONE. COLOUR MATCH TO BE REVIEWED ON SITE WITH CLIENT TEAM PRIOR TO COLOUR APPROVAL	n/a	Awake Purple	All surfaces to be smooth and prepped ahead of decorations Refer to finishes plans for all feature finish location NOTE - All surfaces featuring W2 feature colours should be plasterboard lined and skimmed accordingly prior to painted finish.

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

WALLS AND CEILING FINISHES

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/Supplier	Contact	Specification	Image	Reference	Module	Colour	Notes
W3	Feature Wall Tiles	Nathan Walkley Tile flair	nathan.walkey@tileflair.co.uk	Metro will tile to back of house areas to be brick style horizontal EDGE BIANCO METRO TILES Note: 3mm grout joints. Col: Mapei 113 - mid grey. BLACK EDGING to top side of tiles at approx 1800mm AFFL		TFED20 Mapei ref: 113	300 x 100 x 10mmT	White	<i>Note: Setting out to be brick style horizontally laid.</i> <i>Refer to finishes plans for all locations, BOH only</i>
W4	Hygienic wall covering to food preparation areas	Altro Whiteroc Or similar and approved	Altro Whiterock White™ Wall Cladding Kitchen Wall Cladding Altro	Altro White roc hygienic wall cladding system to all BOH & food preparation areas. All joints to be Altro approved Welded joints and all corners to be thermoformed. Extruded semi rigid PVC Sheet. Satin finish WHITE FULL SHEET SIZE, 2500H		19mmT x H 2500mm	2.5mm T Sheet size: 2500 x 1220	WHITE Satin	To be install in accordance with manufacturers recommendations. Refer to finishes plans for locations.
W5	Wall to rear of back bar Front of House	Contractors Choice	n/a	Bespoke colour glass Back painted optically clear low iron toughened glass to create hygienic finish in block colour to back of back bar. FINISH OF GLASS TO BE AGREED - SANDBLASTED? HIGH SHEEN? Colour to be Insomnia Purple - refer to guidelines for colour ref Pantone 2627 C/U		Bespoke item To match Pantone 2627 C/U	Glass to full elevation. Template required to accommodate sockets and outlets. NOTE: Where joints are required AWW to confirm location	Insomnia Purple	To be install in accordance with manufacturers recommendations. To be toughened compliant with relevant standards. To be fully adhered to wall to rear, with all joints masticed to provided wipeable hygienic surface. Refer to finishes plans for locations.
W6	Feature Brick Slip cladding	Brick tile company or similar approved	https://www.bricktilecompany.com/blend-35-brick-tiles.html	Brick slip feature wall finish Blend 35 SKU: Blend35Group White bricks, white mortar.		215mm x 65mm x 22mm		White brick, white grout	Full Tile (Box 0.6m2) Sample required vinyl to be applied to this feature wall - mock up of brick required for signage contractor to sample graphic on finish

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com



WALLS AND CEILING FINISHES

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/ Supplier	Contact	Specification	Image	Reference	Module	Colour	Notes

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

FLOOR FINISHES

Client:	Insomnia Cookies	Project Name:	Cross Street	Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4	Org Date:	05-Jul-2022

To be read in conjunction with AWW finishes plans 42000

Code	Location	Manufacturer/ Supplier	Telephone	Specification	Image	Reference	Module	Colour	Notes
F1	Front of House Flooring	Amtico LVT	www.amtico.co.uk	Amtico Spacia Wood effect White Oak SS5W2548 AWAITING SAMPLE Plank format, staggered bond laying pattern		Main Timber effect flooring	101.6 x 914.4mm 2.5MM TOTAL THICKNES	Light oak effect	Specialist Flooring Contractor to advise on levels, screeds adhesive, expansion joints & threshold transitions Where possible level finishes to be achieved between different floor finishes - through appropriate floor build ups.
F2	Entrance Matting	Forbo Flooring	www.forbo.com/	Fitted mattwell to customer entrance. Forbo Nuway Grid black barrier matting with black scraper bars and black inserts. 238364 Grid Black Ano - 4730 Raven Black		f	Ref. to Drg for dimension 12mm T	Black	Specialist Flooring Contractor to advise on levels, screeds adhesive, expansion joints & threshold transitions Where possible level finishes to be achieved between different floor finishes - through appropriate floor build ups.

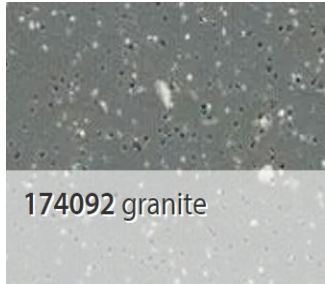
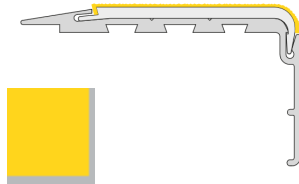
Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

FLOOR FINISHES

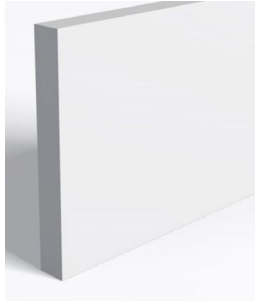

Client:	Insomnia Cookies	Project Name:	Cross Street	Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4	Org Date:	05-Jul-2022

To be read in conjunction with AWW finishes plans 42000

Code	Location	Manufacturer/Supplier	Telephone	Specification	Image	Reference	Module	Colour	Notes
F3	Back of House Flooring To Kitchen / Circulation, food prep areas and BOH WC	Forbo Flooring	www.forbo.co m/	Vinyl sheet safety flooring, to be installed with preformed coved skirting to all edges. Refer to manufacturers guidance for installation and adhesive, Safestep R11 LRV 6% 174092 granite grey Contrast nosings to stairs to achieve a min 30pt LRV difference.		Safestep 174092 granite grey	25m x 2000mm x 2mm T	Granite Grey	Specialist Flooring Contractor to advise on levels, screeds adhesive, expansion joints & threshold transitions Where possible level finishes to be achieved between different floor finishes - through appropriate floor build ups.
F4	Stair Trims / nosings	Gradus	https://www.gradus.com/xt-aluminium	Gradus XT - Aluminium trim with contrasting insert. Insert to stairs to achieve min 30pt LRV difference.		ASVXT1R	70 x 40 mm	Aluminium trim with Ochre insert LRV 49.97	Compatibility with stair profile and construction to be confirmed by specialist flooring installer prior to procurement.

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date: 02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:
Code	Location	Manufacturer/Supplier	Specification	Image	Reference	Module	Colour	Notes
SK1	Throughout	Contractor to advise	100 MM H Square Profile - Primed Painted MDF Skirting to be painted Insomnia Midnight Purple - Sample to be approved		Square Profile	100mm High 18mm depth	 midnight purple PANTONE: 276 C, 7449 U Used as accents on small sections of wall	<i>All timber skirtings throughout</i>
SK2	Coved Skirting to all back of house areas of Vinyl safety flooring	Forbo	Vinyl Flooring F3 to be fitted to preformed coved skirting. All joints to be welded and all edges to be capped.		Coved	196mm High 18mm depth	Vinyl flooring to be fitted to preform	<i>Coved skirting to be installed in line with manufacturers guidance.</i> <i>All joints to be welded, all edges to be sealed.</i> <i>Junction between Whiteroc Hygienic Wall covering and coved skirting to be installed in line with manufacturers guidance.</i>
D1	Throughout	Egger or similar approved	NOTE - ALL HINGES TO BE BLACK TO MATCH IRONMONGERY Door finish - Egger Arctic Grey Exposed solid timber lippings		Internal Grey primed flush door	Widths TBC on site dependant on opening	Grey to match Arctic Grey 	NOTE - requirement for doors to be FD30, fire engineer to comment Refer to Fire Strategy Drawings for fire door locations Ensure minimum 30 points of LRV difference between door finish an handle (black)

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

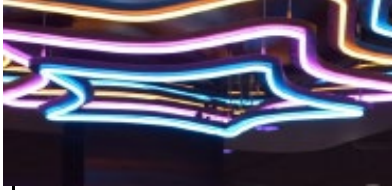
Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

SKIRTING / ARCHITRAVES / DOORS / IRONMONGERY

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date: 02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:
Code	Location	Manufacturer/ Supplier	Specification	Image	Reference	Module	Colour	Notes
Arch 1	To all back of house doors	Contractor to advise	58mm square edge profile MDF architrave to be painted to match D1 door finish		Square Profile			<i>NOTE - Skirtings and Architraves to be painted to match Insomnia Midnight Purple. Unless otherwise stated.</i>
Handle 1.1	To all internal Doors	Contractor to confirm.	Black anodised door handle - simple lever handle with circular bezel. Refer to AWW drg for Ironmongery requirements e.g. Locks, thumb turns, latches etc.		SKU-218464	57mm x 122mm 50mm bezel	matt black	Samples to be approved prior to procurement. Locking / handle / ironmongery requirements to be confirmed with client
All transition strips to be metal Gradus or similar, specification to be developed with specialist flooring contractor at detailed design phase.								

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/Supplier	Telephone	Specification	Image	Reference	Module	Colour	Notes
NOTE: AWW lighting schedule reflects design intent - Electrical loadings and testing to be approved by electrical contractor									
MEP contractor to provide lighting design and calculations. AWW provide design intent for light fittings and feature lighting only.									
L1	Feature locations throughout front of house.	Bespoke - TBC	N/A	Bespoke design to be developed		Bespoke design to be developed	tba	tba - various	Bespoke design to be developed BY SPECIALIST SIGNAGE CONTRACTOR
L2	Throughout - Front of house exposed soffit unless otherwise stated	Astro Lighting or similar and approved	N/A	Down light to all front of house areas of exposed soffit to create ambient lighting unless otherwise stated. KOS Round 100 LED fitting BEAM ANGLE:34.0 LUMEN OUTPUT (LM):329.0 COLOUR TEMPERATURE (K):3000 DIMENSIONS:H 100 Dia		1326023	100mm h x 80mm Dia	Matt black	Performance and Wattage / Lumen output to form part of electrical design and be approved by electrical consultant. Client comment on light temperature. Down lighting to create ambient lighting Refer to L1 for feature lighting All cabling to be black and fixed back to soffit
L3	Throughout - Front of house Bulkhead unless otherwise stated	Astro Lighting or similar and approved	N/A	Minima Round Adjustable Matt Black 1249016 CUTOUT SHAPE:Round CUTOUT DIAMETER:76mm / 3in RECESS DEPTH:150 ADJUSTABLE:Yes DIMENSIONS:H 110 Dia 85 W 160 D 150mm		1249016		Matt black	Performance and Wattage / Lumen output to form part of electrical design and be approved by electrical consultant. Client comment on light temperature. Down lighting to create ambient lighting Refer to L1 for feature lighting

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/Supplier	Telephone	Specification	Image	Reference	Module	Colour	Notes
L4	Throughout -Back of House to areas of layin grid / hygienic tiles - unless otherwise stated	Contractors choice Whitecroft lighting Hygiene LED or similar and approved	N/A	Hygiene LED lighting to fit to hygienic gridded ceiling systems. Contractor to confirm compatibility of system IP54 recessed Luminaire. 4000K			600 x 600	white	NOTE: Spec & output to form part of electrical design and be approved by electrical consultant.
SWITCH1	Throughout FOH - unless otherwise stated	Contractors choice	N/A	Aesthetic design intent only All To be black faceplates with concealed Screws USB may be required in some instances NOTE: metal finish in black				Matt black	NOTE: Spec & output to form part of electrical design and be approved by electrical consultant.
SWITCH2	Throughout FOH - unless otherwise stated	Contractors choice	N/A	Aesthetic design intent only Single Switch Option All To be black faceplates with concealed Screws NOTE: metal finish in black				Matt black	NOTE: Spec & output to form part of electrical design and be approved by electrical consultant.
Extent & specification of external lighting to be confirmed with client. All external lighting and illuminated signage proposal subject to relevant consents.									
To achieve the stated functional lighting provision, the Contractor must use the specified number and type of 'feature' light fittings as shown on the M&E luminaire schedule, Room Data Sheets and AWW drawings/schedules. If the number of specified fittings cannot meet the functional requirement, then the contractor must propose a suitable design of additional lighting over and above those feature lights specified to achieve the desired effect without detriment to the original design intent. Note: AWW Interior specification schedule only details Feature Lighting to reflect AWW Interior Design Concept. Refer to M&E schedule of Luminaires for comprehensive lighting specification.									

Note: Please read in conjunction with AWW drawings;
Contractor to note and check delivery dates for all direct order items and ensure that orders are placed to meet the programme.
Failure to do so may result in respecification and additional costs being met by the contractor.
All finishes to be applied according to manufacturer's instructions and COSHH (Control of Substances Hazardous to Health) from ACOP (Approved Code of Practice).

Note: Products, quantities and dimensions are for costing purposes, these may be subject to change in accordance with design development
Rivergate House, 70 Redcliff Street, Bristol BS1 6LS
Tel: 0117 923 2535 Fax: 0117 942 6689 www.aww-uk.com

Furniture

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02.09.22
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/Supplier	Contact	Specification	Image	Reference	Module	Colour	Notes
LF1	Desk BoH	Office furniture online or similar approved		NEXT DAY Karbon K3 Compact Rectangular Deluxe Cantilever Desk Leg - Graphite Top - White			1600 x 800mm	All black components , WHITE TOP	Refer to AWW GA Plans for locations 1.no. Desk
LF2	Task chair BoH	Office furniture online or similar approved		Comfort Ergo 3- Lever Mesh Operator Chair Adjustable arms Charcoal finish, black upholstered seat			490 x 602 x 965/1115	All black components	Refer to AWW GA Plans for locations 1.no. Task Chair
LF3	Lockers BoH	LateralFile Lodge - Bisley (bisleydirect.co.uk)	www.bisleydirect.co.uk	Bisley Lateral file locker. 10 unit bank. Black finish. Barrel Key or combination lock TBC		Bisley	1985mm Width 800mm Depth 470mm	Black	Refer to AWW GA plans for locations 10.no. lockers
LF4	Cleaners cupboard	Contractor's choice		CoSHH Floor Cupboard Single door, 20Ltr			1830(H) x 610(W) x 457(D)mm	grey	Capacity 20Ltr Dimensions 1830(H) x 610(W) x 457(D)mm Material Steel Weight 46.5kg Colour Grey Indoor use only Steel construction with a welded frame Reinforced doors with 3 point locking plus 2 keys Shelf loading 70Kg UDL Supplied with two keys Supplied fully-assembled

SANITARYWARE

Client:	Insomnia Cookies	Project Name:	Cross Street					Rev Date:	02/09/2022
Job No:	4591	Phase:	Stage 4					Org Date:	05-Jul-2022
Code	Location	Manufacturer/ Supplier	Contact	Specification	Image	Reference	Module	Colour	Notes
SW1	Wash Hand Basin BoH With Taps	Ideal Standard	www.ideals pec.co.uk	55cm Concept Washhand basin Tempo Single lever basin mixer no waste with 5l/min regulator		E785201 B0764AA	55cm	WHITE 01 CERAMIC Taps to be brushed SS	Refer to AWW GA Plans for locations 1.no. Wash Hand Basin 1.no. mixer tap
SW2	WC BoH	Ideal Standard	www.ideals pec.co.uk	CLOSE COUPLED TOILET PAN CLOSE COUPLED 4/2.6 LITRE PUSH BUTTON CISTERN Slow Close Seat and Cover		T328001 T427101 T679301	Height400 mm Width360 mm Depth665 mm	WHITE CERAMIC All metal to be brushed SS	Refer to AWW GA plans for locations 1.no. WC
SW3	Toilet Roll Dispenser BoH	Nisbets	https://www. nisbets.co.u k/	Jantex Stainless Steel Jumbo Roll Tissue Dispenser		Jantex Stainless Steel Jumbo Roll Tissue Dispenser	Dimensions 268(H) x 260(W) x 125(D) mm	Stainless Steel	Refer to AWW GA plans for locations 1.no. Dispenser
SW4	Mirror BoH	Contractor to confirm	Contractor to confirm	Low Iron Clear Toughened Glass Mirror. To be face fixed to wall to rear of sink. Approx dims. 500mm W x 700mm H		Mirror	Approx dims. 500mm W x 700mm H	Low Iron Toughened Glass	Refer to AWW GA plans for locations 1.no. Mirror

SW5	Cleaner Sinks BoH	Nisbets	https://www.nisbets.co.uk/	Vogue Stainless Steel Mop Sink M&E contractor to confirm compatibilty for taps and waste kit		Vogue Stainless Steel Mop Sink	Size: 550(H) x 500(W) x 500(D)mm. With splashback	Stainless Steel All metal to be brushed SS Taps to be SS	Refer to AWW GA plans for locations 1.no. Cleaners Sink
SW6	BOH WC	Contractors choice		Dyson airblade V hand dryer - OR SIMILAR APPROVED BY CLIENT 12 second dry time Hygienic performance with HEPA filter 5-year guarantee				Sprayed nickel	Refer to AWW GA plans for locations 1.no. hand dryer