


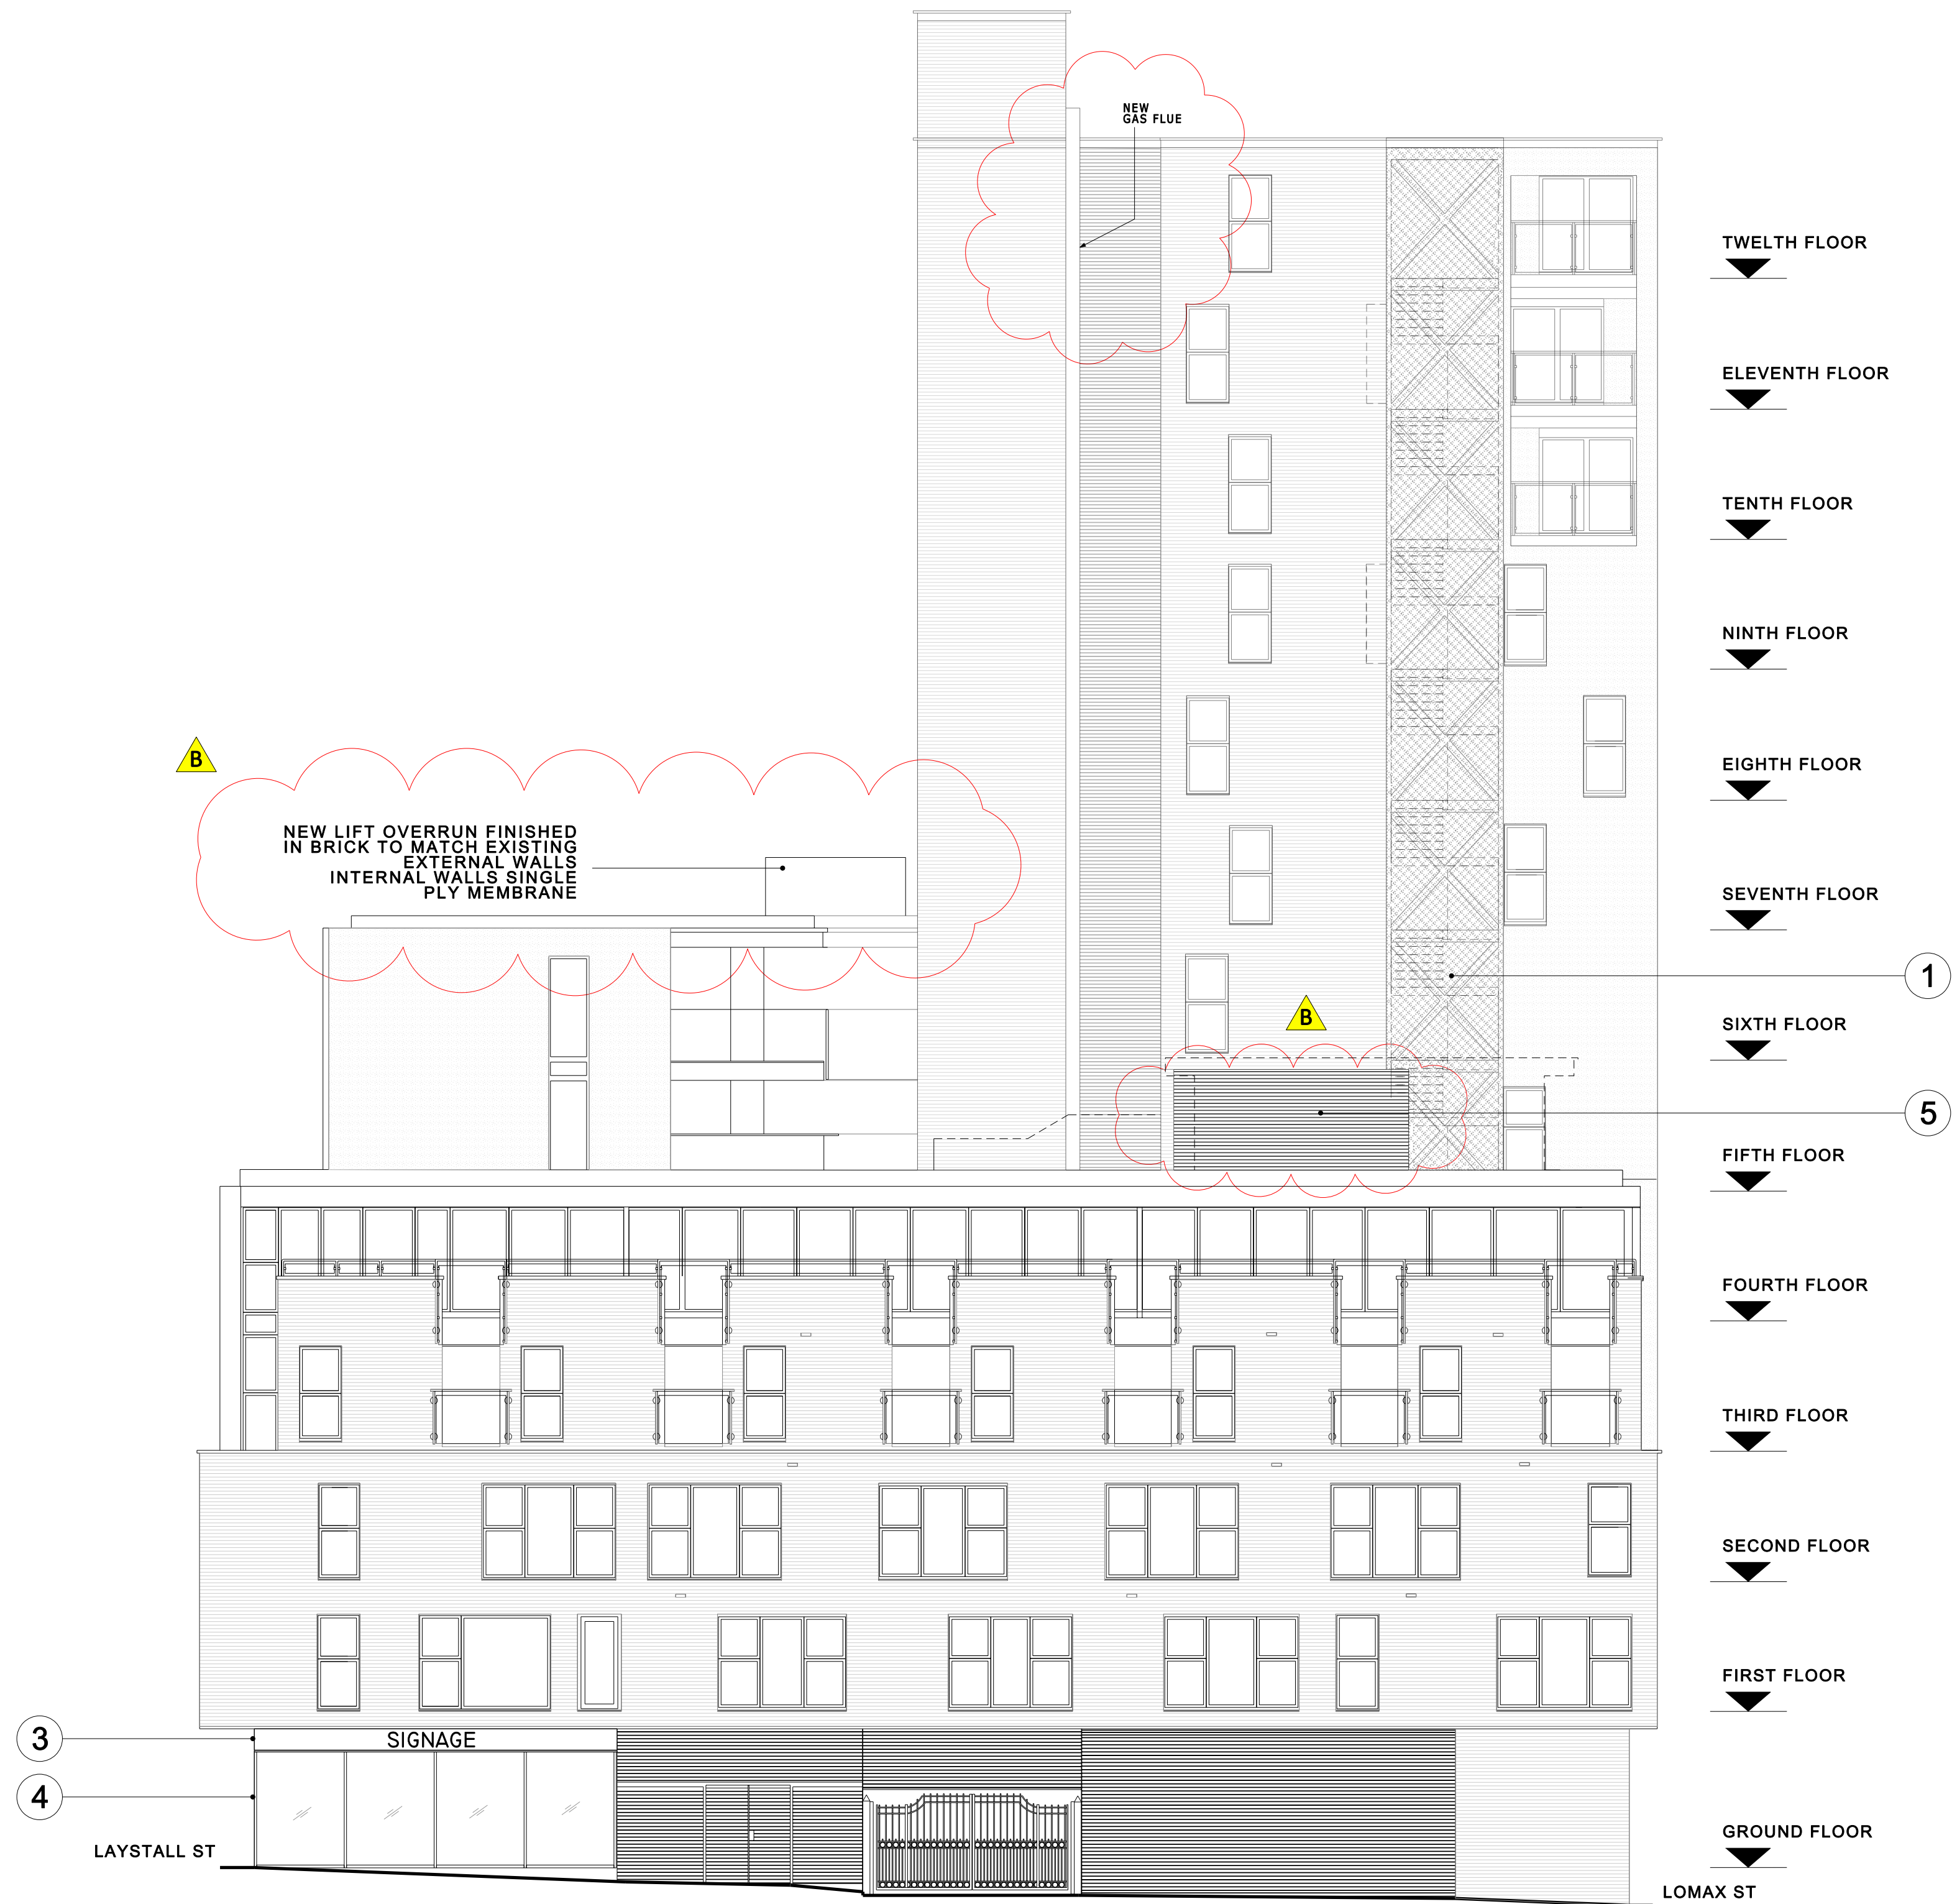

KEY

- EXISTING BRICK
- EXISTING RENDER
- EXISTING LOUVRES

- PPC Mesh cladding to provide limited weather protection to stair, RMIG Havana LT 150x64x20x3 49% free area RAL 7021
- PPC Mesh cladding to provide limited weather protection to stair, RMIG Havana LT 150x64x20x3 49% free area RAL 7021 with fire resisting backing
- PPC SOLID PANEL FOR SIGNAGE + VENTILATION
- NOTE SIGNAGE INDICATIVE, SUBJECT TO ADVERTISEMENT CONSENT
- NEW PPC CURTAIN WALLING SHOPFRONT, DARK GREY FRAME
- PROPOSED CONDENSER UNITS BEHIND LOUVRED SCREEN
PPC ALUMINIUM LOUVRED SCREEN TO HEIGHT OF 2.6m ABOVE ROOF LEVEL RAL 7035

CLEAN AND REPAIR THE ENTIRE EXTENT OF EXTERNAL BRICKWORK AND RENDER TO BS 8221-1:2012 & AS NBS SECTION C40. CLEANING WORKS TO INCLUDE ALL REVEALS, RECESSES, CILLS SOFFITS AND SURROUNDS.

ROOM HVAC SYSTEMS TO BE VENTILATED THROUGH THE EXTERIOR FACADE. WHERE POSSIBLE, REUSE EXISTING AIR BRICK VENTS AS VENTILATION OUTLETS. PROVIDE NEW AIR BRICK VENTS WHERE NECESSARY. NEW AIR BRICKS TO MATCH THE EXISTING BRICKWORK.

