


A SECTION / ELEVATION LOOKING SOUTH
1:25 at A1

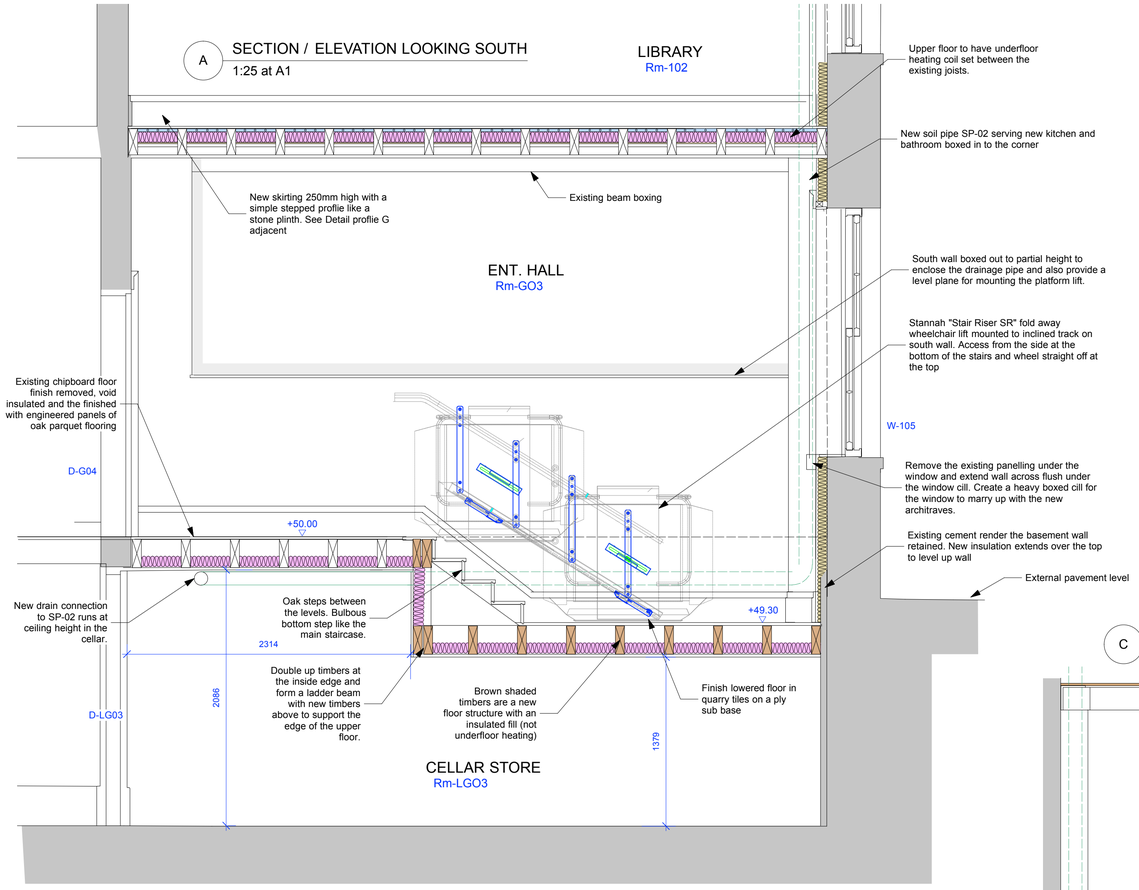

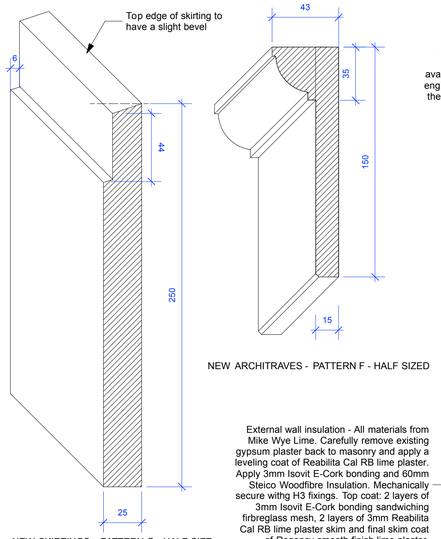



External wall insulation - All materials from Mike Wye Lime. Carefully remove existing gypsum plaster back to masonry and apply a leveling coat of Reabilita Cal RB lime plaster. Apply 3mm Isovit E-Cork bonding and 60mm Steico Woodfibre Insulation. Mechanically secure withg H3 fixings. Top coat: 2 layers of 3mm Isovit E-Cork bonding sandwiching firbreglass mesh, 2 layers of 3mm Reabilita Cal RB lime plaster skim and final skim coat of Regency smooth finish lime plaster.

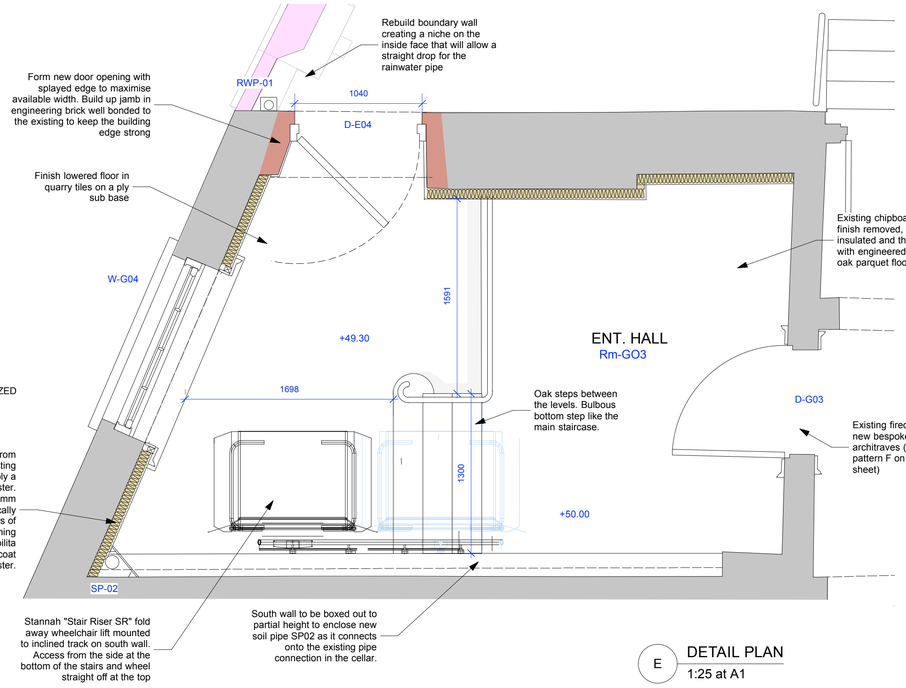


E DETAIL PLAN
1:25 at A1

C SECTION / ELEVATION LOOKING WEST
1:25 at A1

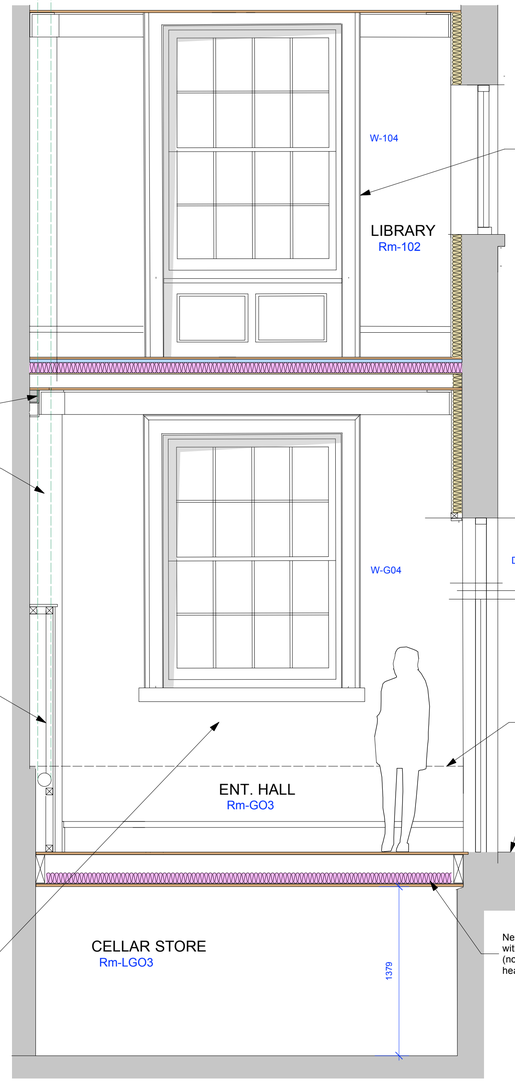


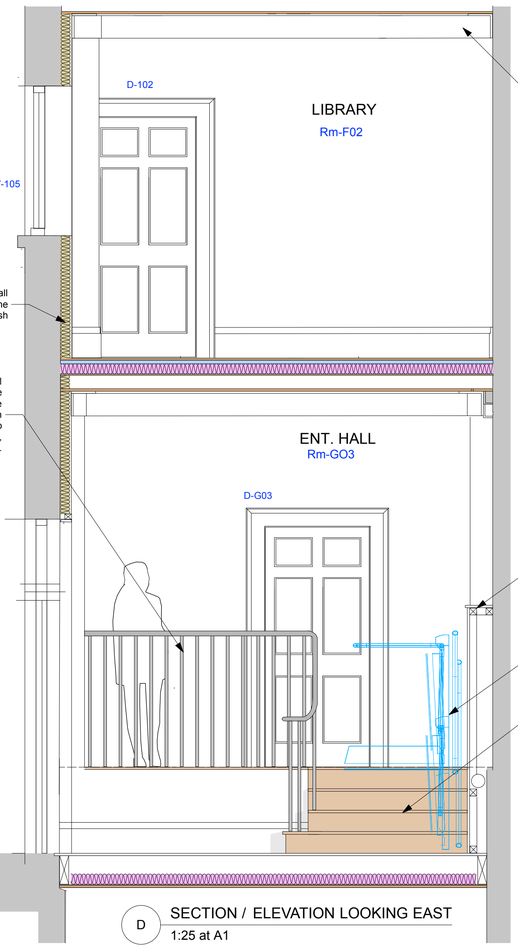

Simple flat cornice 'Frieze' detail - extends down from ceiling and also flat across the ceiling. 180mm deep x 15mm out from the wall or ceiling



B SECTION / ELEVATION LOOKING NORTH
1:25 at A1

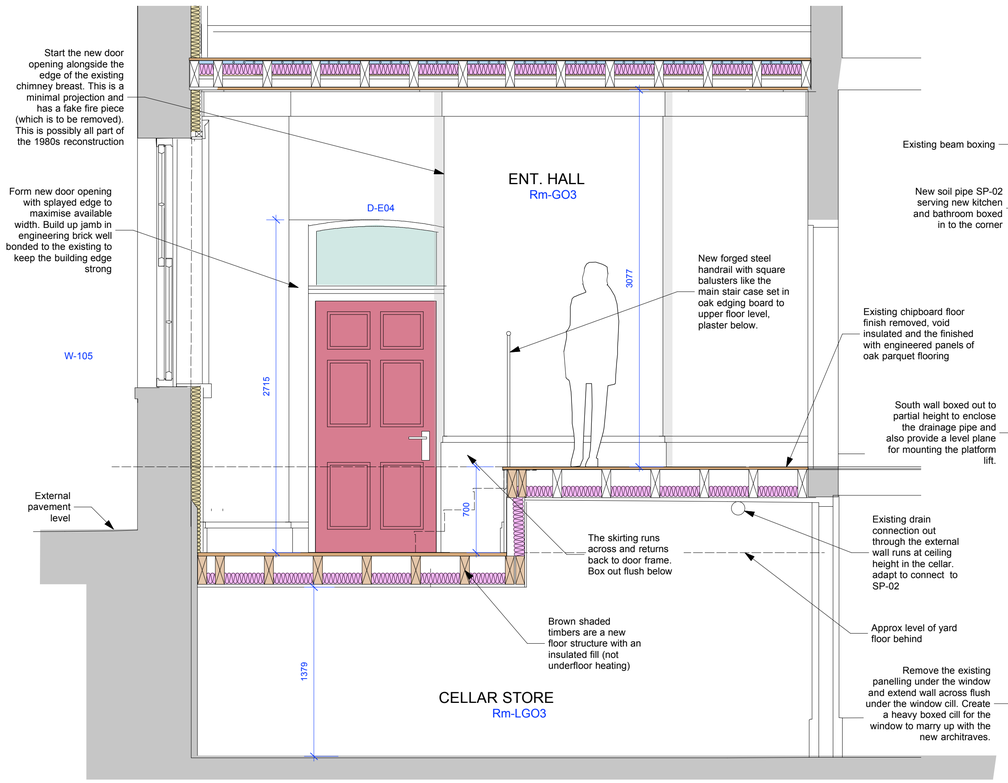

D SECTION / ELEVATION LOOKING EAST
1:25 at A1

0 1 2 metres

WILES & MAGUIRE
The Danesmead Wing, 33 Fulford Cross, York Y010 4PB
tel. 01904 655447 eml. enquiries@wamarchitects.co.uk

THE OLD STATIONMASTERS HOUSE, MANCHESTER
Redevelopment to form Holiday Accomodation
Details of Proposed Rear Entrance (Rm-G03)
For The landmark Trust

Scale: 1:25 @ A1 - Date: NOV 2022- By: AW

STAT:01/4317 REVISION:

• DO NOT SCALE FROM THIS DRAWING
• THE CONTRACTOR IS TO CHECK ALL DIMENSIONS ON SITE
• THIS DRAWING IS SUBJECT TO COPYRIGHT