



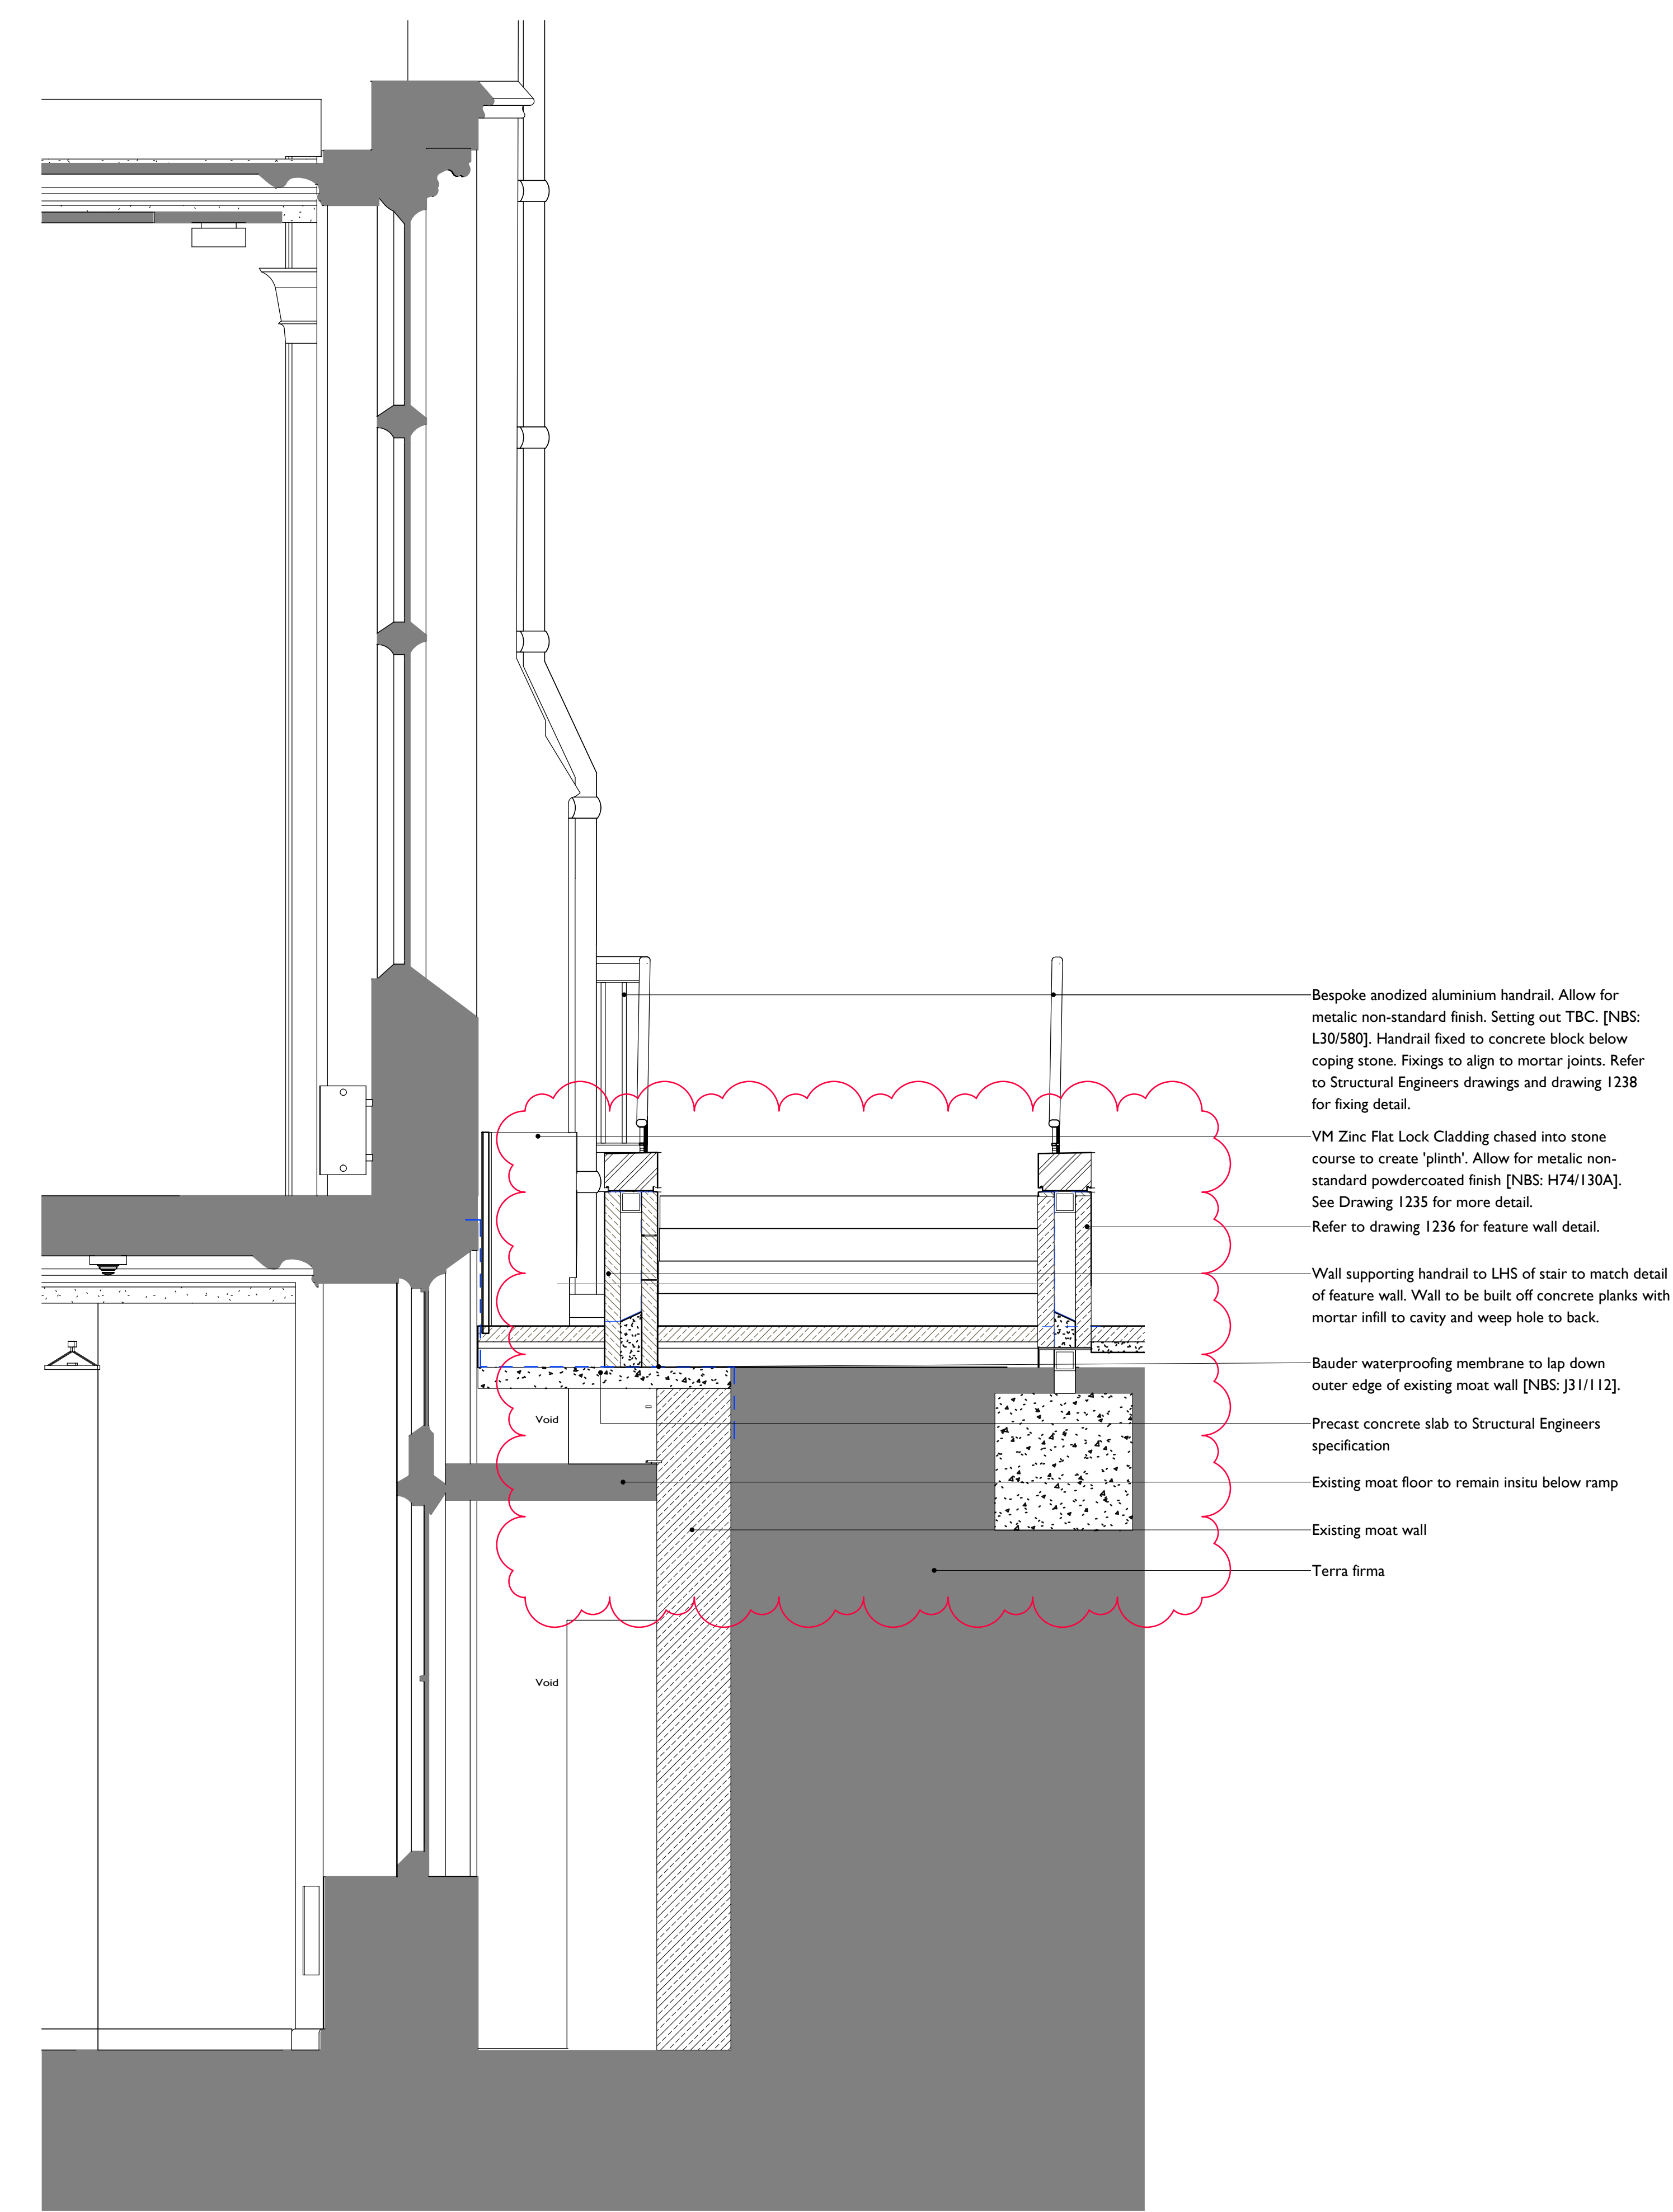


1
1237
Section HH as Proposed
1 : 20

- Bespoke anodized aluminium handrail. Allow for metallic non-standard finish. Setting out TBC. [NBS: L30/580]. Handrail fixed to concrete block below coping stone. Fixings to align to mortar joints. Refer to Structural Engineers drawings and drawing 1238 for fixing detail.
- VM Zinc Flat Lock Cladding chased into stone course to create 'plinth'. Allow for metallic non-standard powdercoated finish [NBS: H74/130A]. See Drawing 1235 for more detail.
- Refer to drawing 1236 for feature wall detail.
- Wall supporting handrail to LHS of stair to match detail of feature wall. Wall to be built off concrete planks with mortar infill to cavity and weep hole to back.
- Bauder waterproofing membrane to lap down outer edge of existing moat wall [NBS: J31/112].
- Precast concrete slab to Structural Engineers specification
- Existing moat floor to remain insitu below ramp
- Existing moat wall
- Terra firma

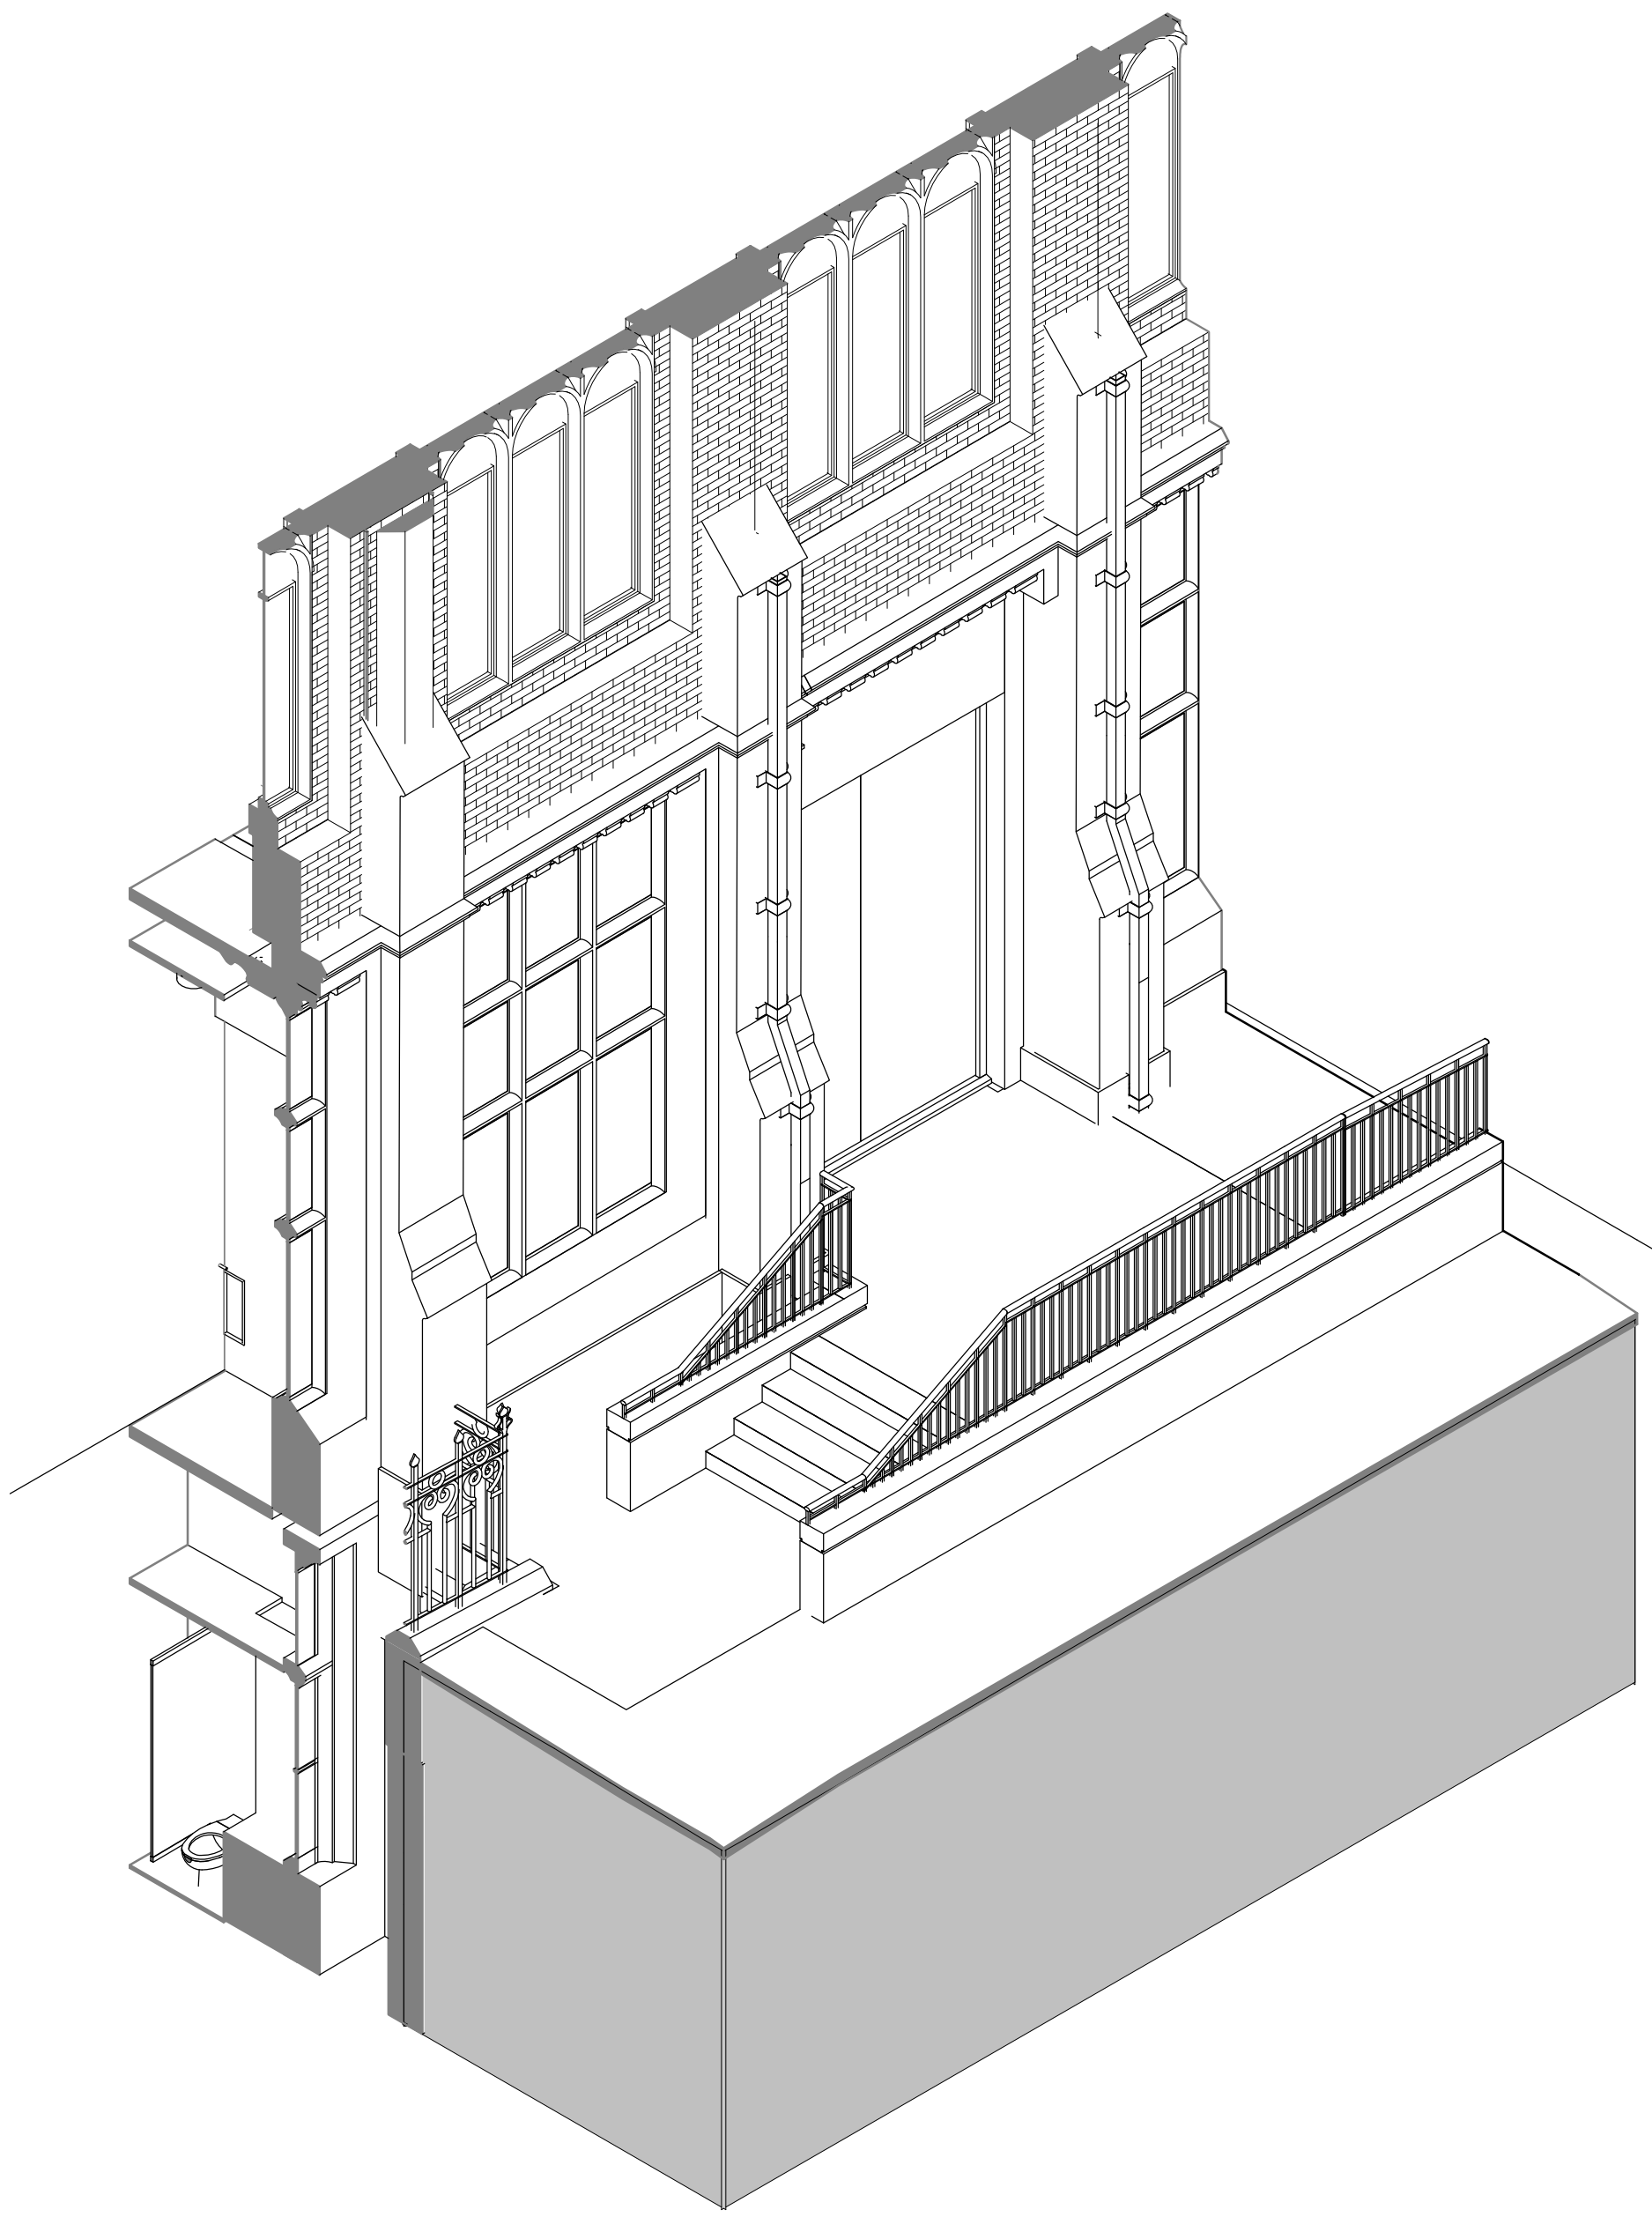

2
1237
Oxford Road Entrance staircase

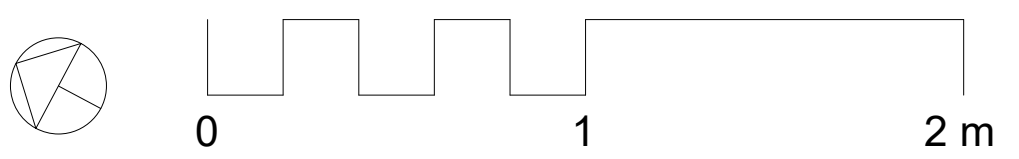


Notes:
Drawings are based on survey data and may not accurately represent what is physically present.

Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.

All dimensions are in millimeters unless noted otherwise.

Purcell shall be notified in writing of any discrepancies.

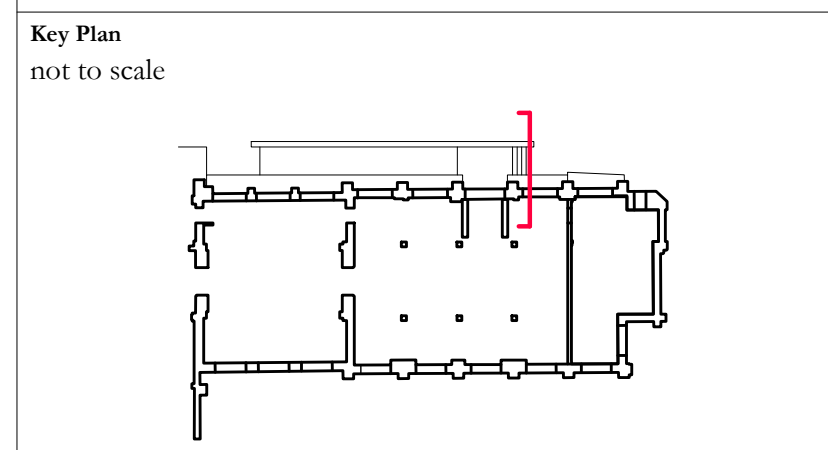

This drawing is to be read in conjunction with all Existing drawings, Demolition drawings, Proposed drawings, Specifications and MEP and Structural information.

Refer to drawing 1400 for level information.

Rev E
- Omitted blockwork within feature wall
- Updated coursing and levels following coordination with structures.

E	11/11/21	JB	JR	Issued for Construction
D	24/06/2021	JB	DC	Issued for Tender
C	09/05/2021	JB	DC	Issued for Stage 4 Coordination
B	01/06/2020	JB	DC	Scale Bar added
A	15/05/2020	JB	JR	ORE Issued for Stage 4 Costing
-	16/04/2020	JB	DC	ORE Design Development WIP

No

Date

Drawn

Checked

Description

MANCHESTER MUSEUM

MANCHESTER

1824

The University of Manchester

PROJECT STATUS WORK STAGE 4

CLIENT University of Manchester

PROJECT Manchester Museum Courtyard

DRAWING TITLE Section HH

SIZE & SCALE [A1] As indicated

DRAWING STATUS FOR CONSTRUCTION

JOB NUMBER 237010

DRAWING NO. 6137-PUR-ORE-XX-DR-A-1237
REV E

PRINTED: 11/11/2021 18:47:52

