


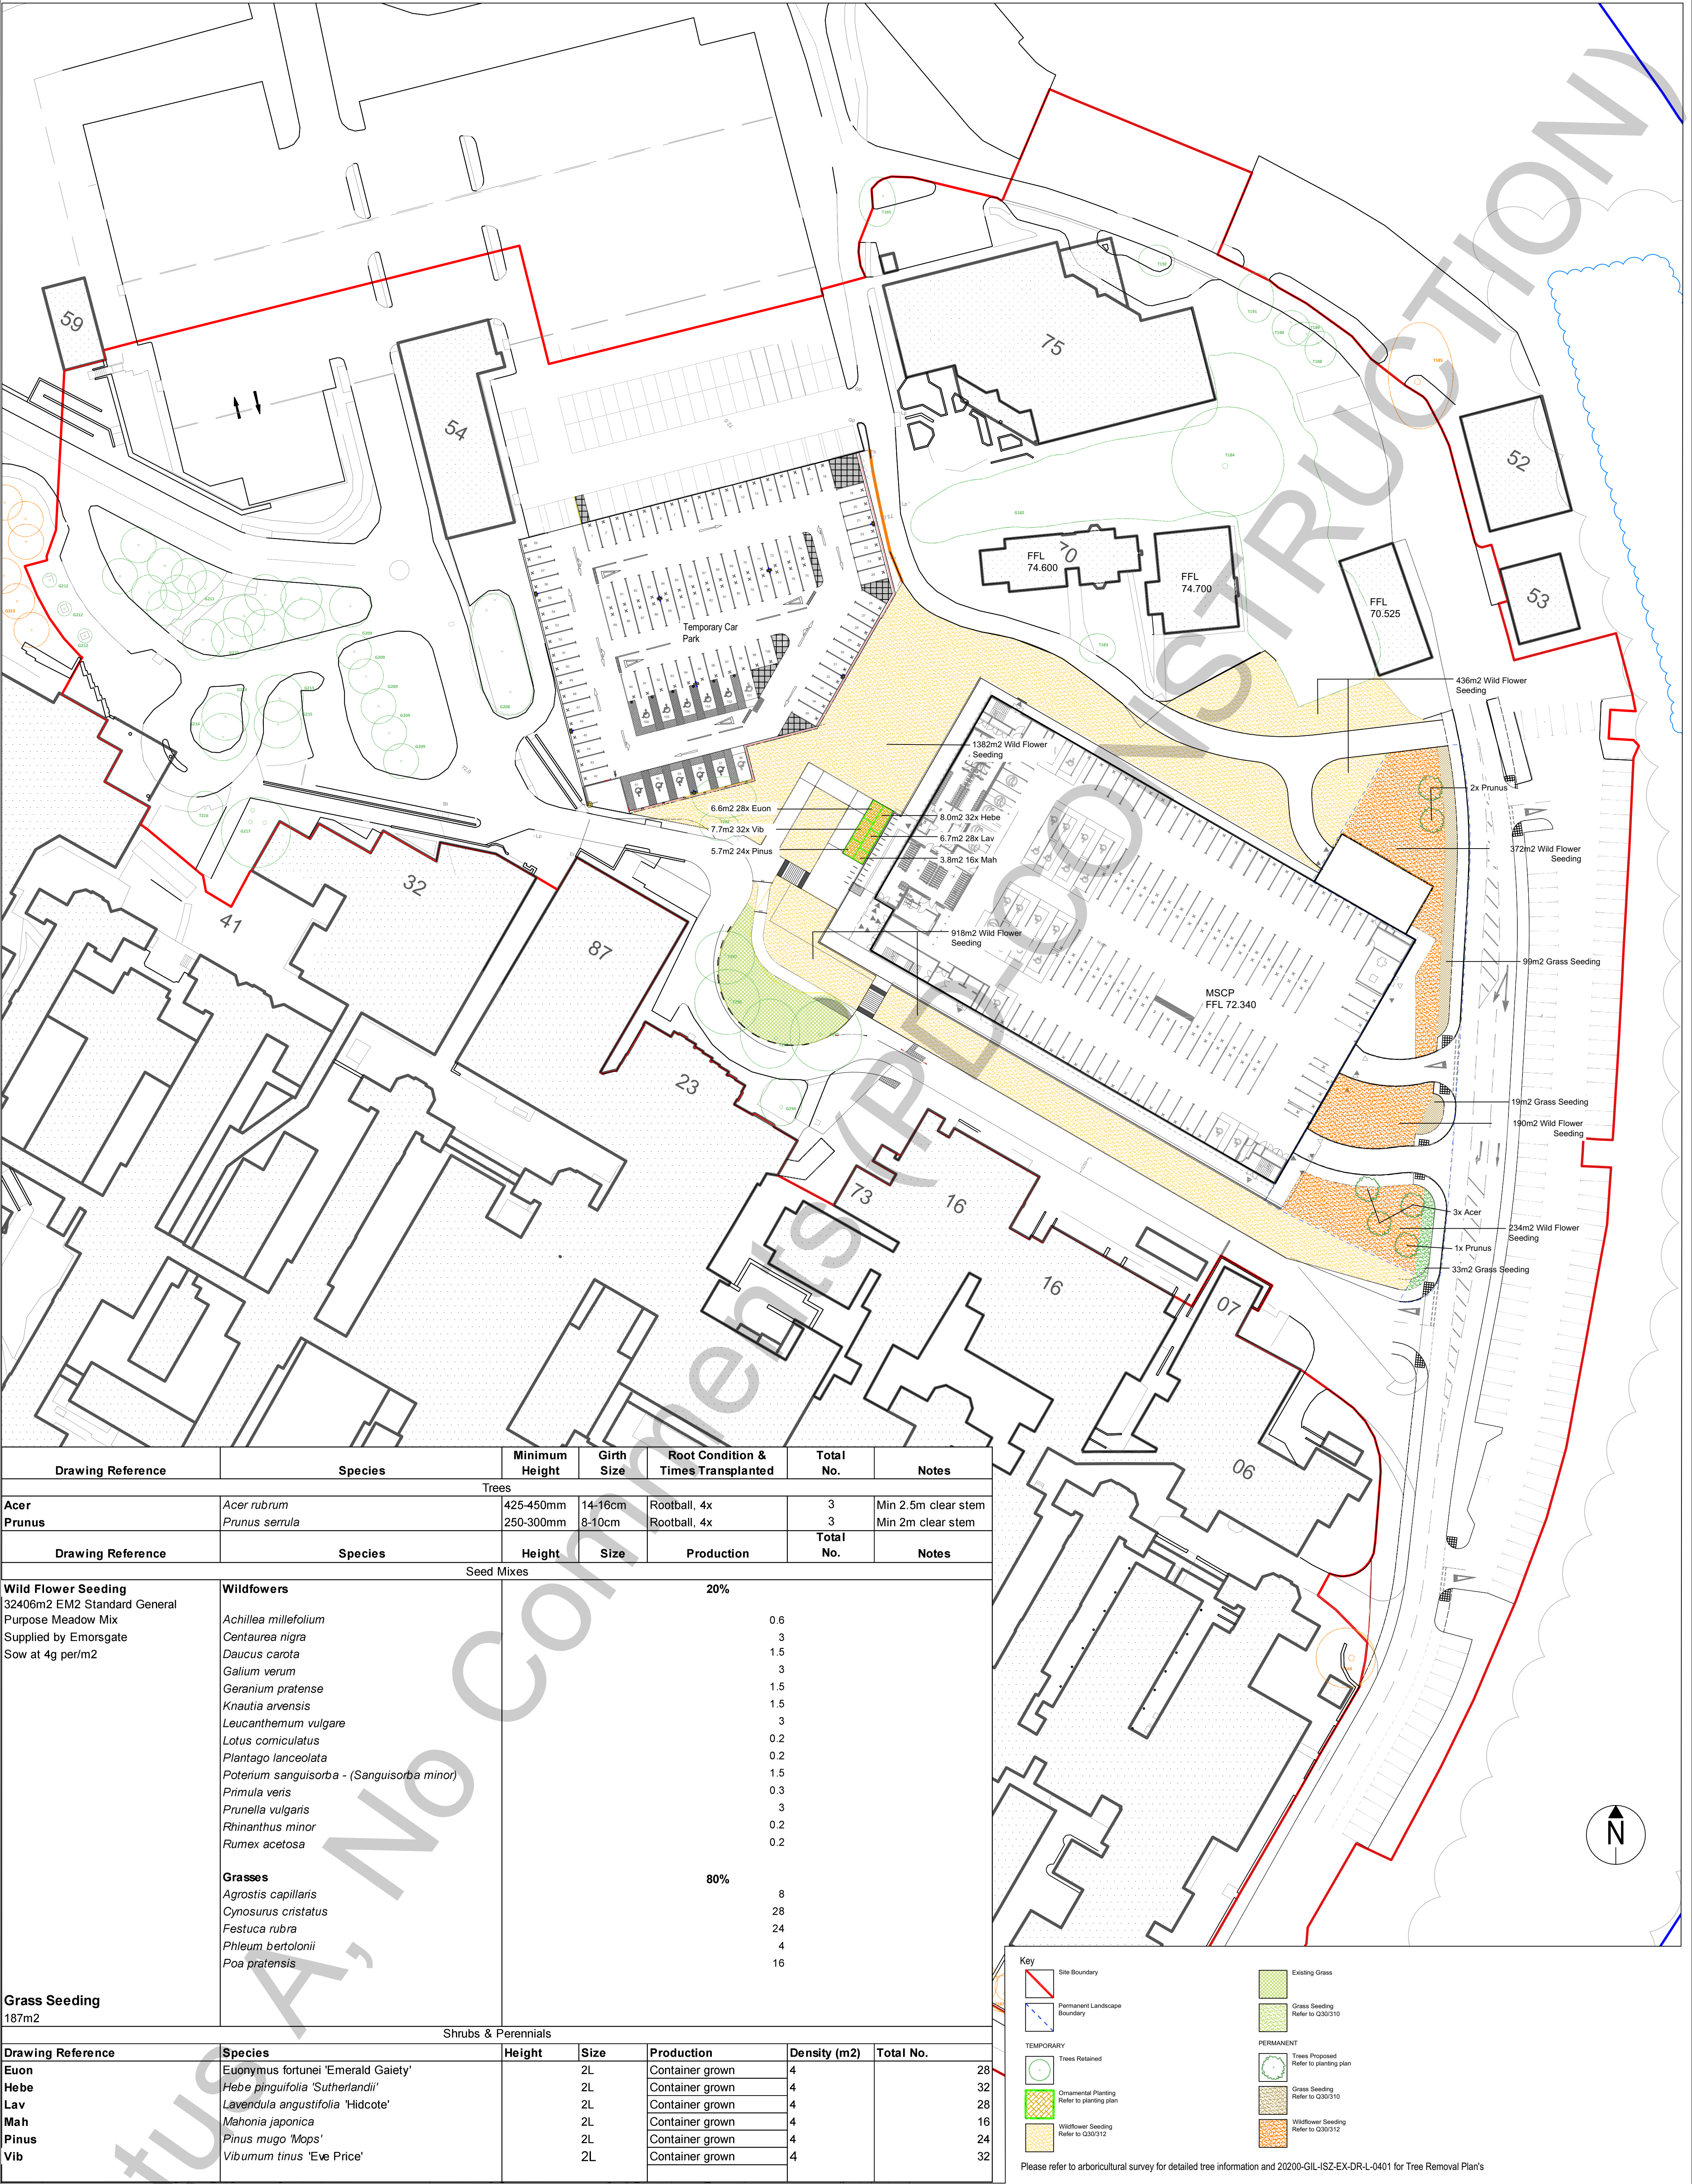

Drawing Reference	Species	Minimum Height	Girth Size	Root Condition & Times Transplanted	Total No.	Notes
Trees						
Acer	Acer rubrum	425-450mm	14-16cm	Rootball, 4x	3	Min 2.5m clear stem
Prunus	Prunus serrula	250-300mm	8-10cm	Rootball, 4x	3	Min 2m clear stem
Drawing Reference	Species	Height	Size	Production	Total No.	Notes
Seed Mixes						
Wild Flower Seeding 32406m2 EM2 Standard General Purpose Meadow Mix Supplied by Emorsgate Sow at 4g per/m2	Wildflowers		20%			
	Achillea millefolium				0.6	
	Centaurea nigra				3	
	Daucus carota				1.5	
	Galium verum				3	
	Geranium pratense				1.5	
	Knautia arvensis				1.5	
	Leucanthemum vulgare				3	
	Lotus corniculatus				0.2	
	Plantago lanceolata				0.2	
	Poterium sanguisorba - (Sanguisorba minor)				1.5	
	Primula veris				0.3	
	Prunella vulgaris				3	
	Rhinanthus minor				0.2	
	Rumex acetosa				0.2	
	Grasses		80%			
	Agrostis capillaris				8	
	Cynosurus cristatus				28	
	Festuca rubra				24	
	Phleum bertolonii				4	
	Poa pratensis				16	
Grass Seeding 187m2						
Shrubs & Perennials						
Drawing Reference	Species	Height	Size	Production	Density (m2)	Total No.
Euon	Euonymus fortunei 'Emerald Gaiety'		2L	Container grown	4	28
Hebe	Hebe pinguifolia 'Sutherlandii'		2L	Container grown	4	32
Lav	Lavendula angustifolia 'Hidcote'		2L	Container grown	4	28
Mah	Mahonia japonica		2L	Container grown	4	16
Pinus	Pinus mugo 'Mops'		2L	Container grown	4	24
Vib	Viburnum tinus 'Eve Price'		2L	Container grown	4	32

Key

Site Boundary

Permanent Landscape Boundary

TEMPORARY

Trees Retained

Ornamental Planting
Refer to planting plan

Wildflower Seeding
Refer to Q30/312

EXISTING

Existing Grass

Grass Seeding
Refer to Q30/310

PERMANENT

Trees Proposed
Refer to planting plan

Grass Seeding
Refer to Q30/310

Wildflower Seeding
Refer to Q30/312

Please refer to arboricultural survey for detailed tree information and 20200-GIL-ISZ-EX-DR-L-0401 for Tree Removal Plan's