

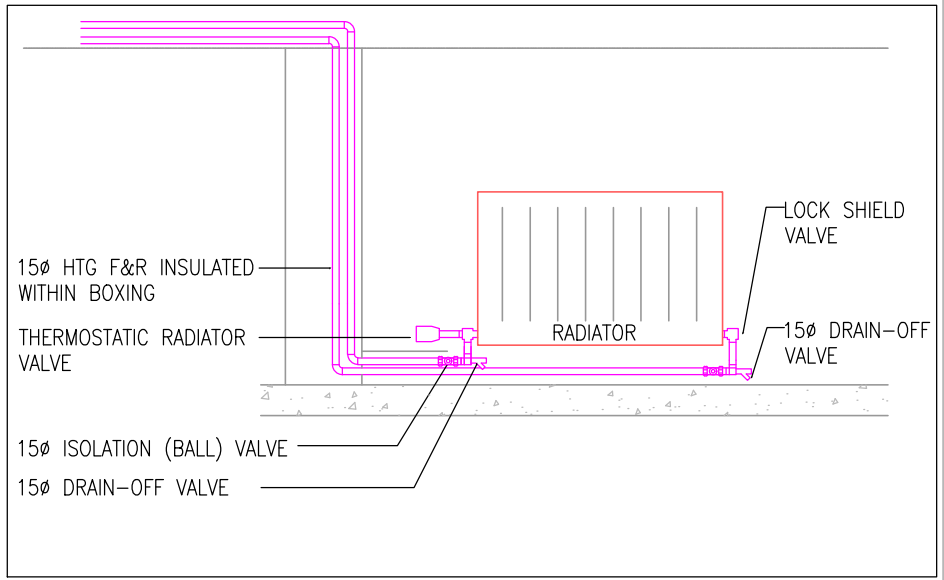


- NOTES:
- ITEMS LISTED TO BE STRIPPED OUT SHALL FIRST BE SUITABLY ISOLATED AND DRAINED DOWN/PURGED, WHERE ITEMS ARE REQUIRED TO BE RETAINED, CARE SHALL BE TAKEN TO PROTECT THE EQUIPMENT DURING THE CHANGES TO THE BUILDING FABRIC AND ROOM SPACES.
 - ALL DUCTWORK AND PIPEWORK SIZES SHOWN ARE FROM EXISTING AS-INSTALLED INFORMATION HOWEVER THE CONTRACTOR TO CONFIRM ACCURATE DIMENSIONS.
 - THE MECHANICAL SERVICES CONTRACTOR AND THEIR NOMINATED SPECIALIST CONTRACTORS MUST VISIT THE SITE AND AREA OF WORKS PRIOR TO SUBMITTING THEIR TENDER SUM FOR THE PROPOSED WORKS.
 - WORKS SHALL INCLUDE ALL BUILDERS WORK/ACCESS SUPPORT REQUIREMENTS (SCAFFOLD) ETC., THAT ARE REQUIRED TO FACILITATE COMPLETION OF THE WORKS AS DETAILED.
 - ALL MATERIALS FROM STRIP OUT ACTIVITIES SHALL BE REMOVED FROM SITE DAILY AND A HIGH LEVEL OF CLEANLINESS SHALL BE MAINTAINED.
 - ALL SERVICES NOT EXPLICITLY IDENTIFIED ON THIS DRAWING TO BE STRIPPED OUT SHALL BE PROTECTED, MAINTAINED IN AN OPERATIONAL STATE AND RE-COMMISSIONED ON COMPLETION OF THE WORKS (WHERE APPLICABLE).

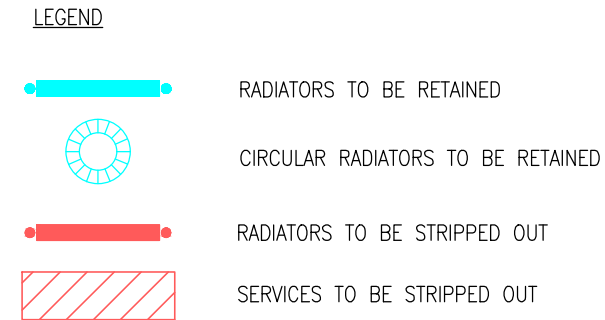

GENERAL ARRANGEMENT OF VALVES AND PIPEWORK CONNECTIONS TO RADIATORS

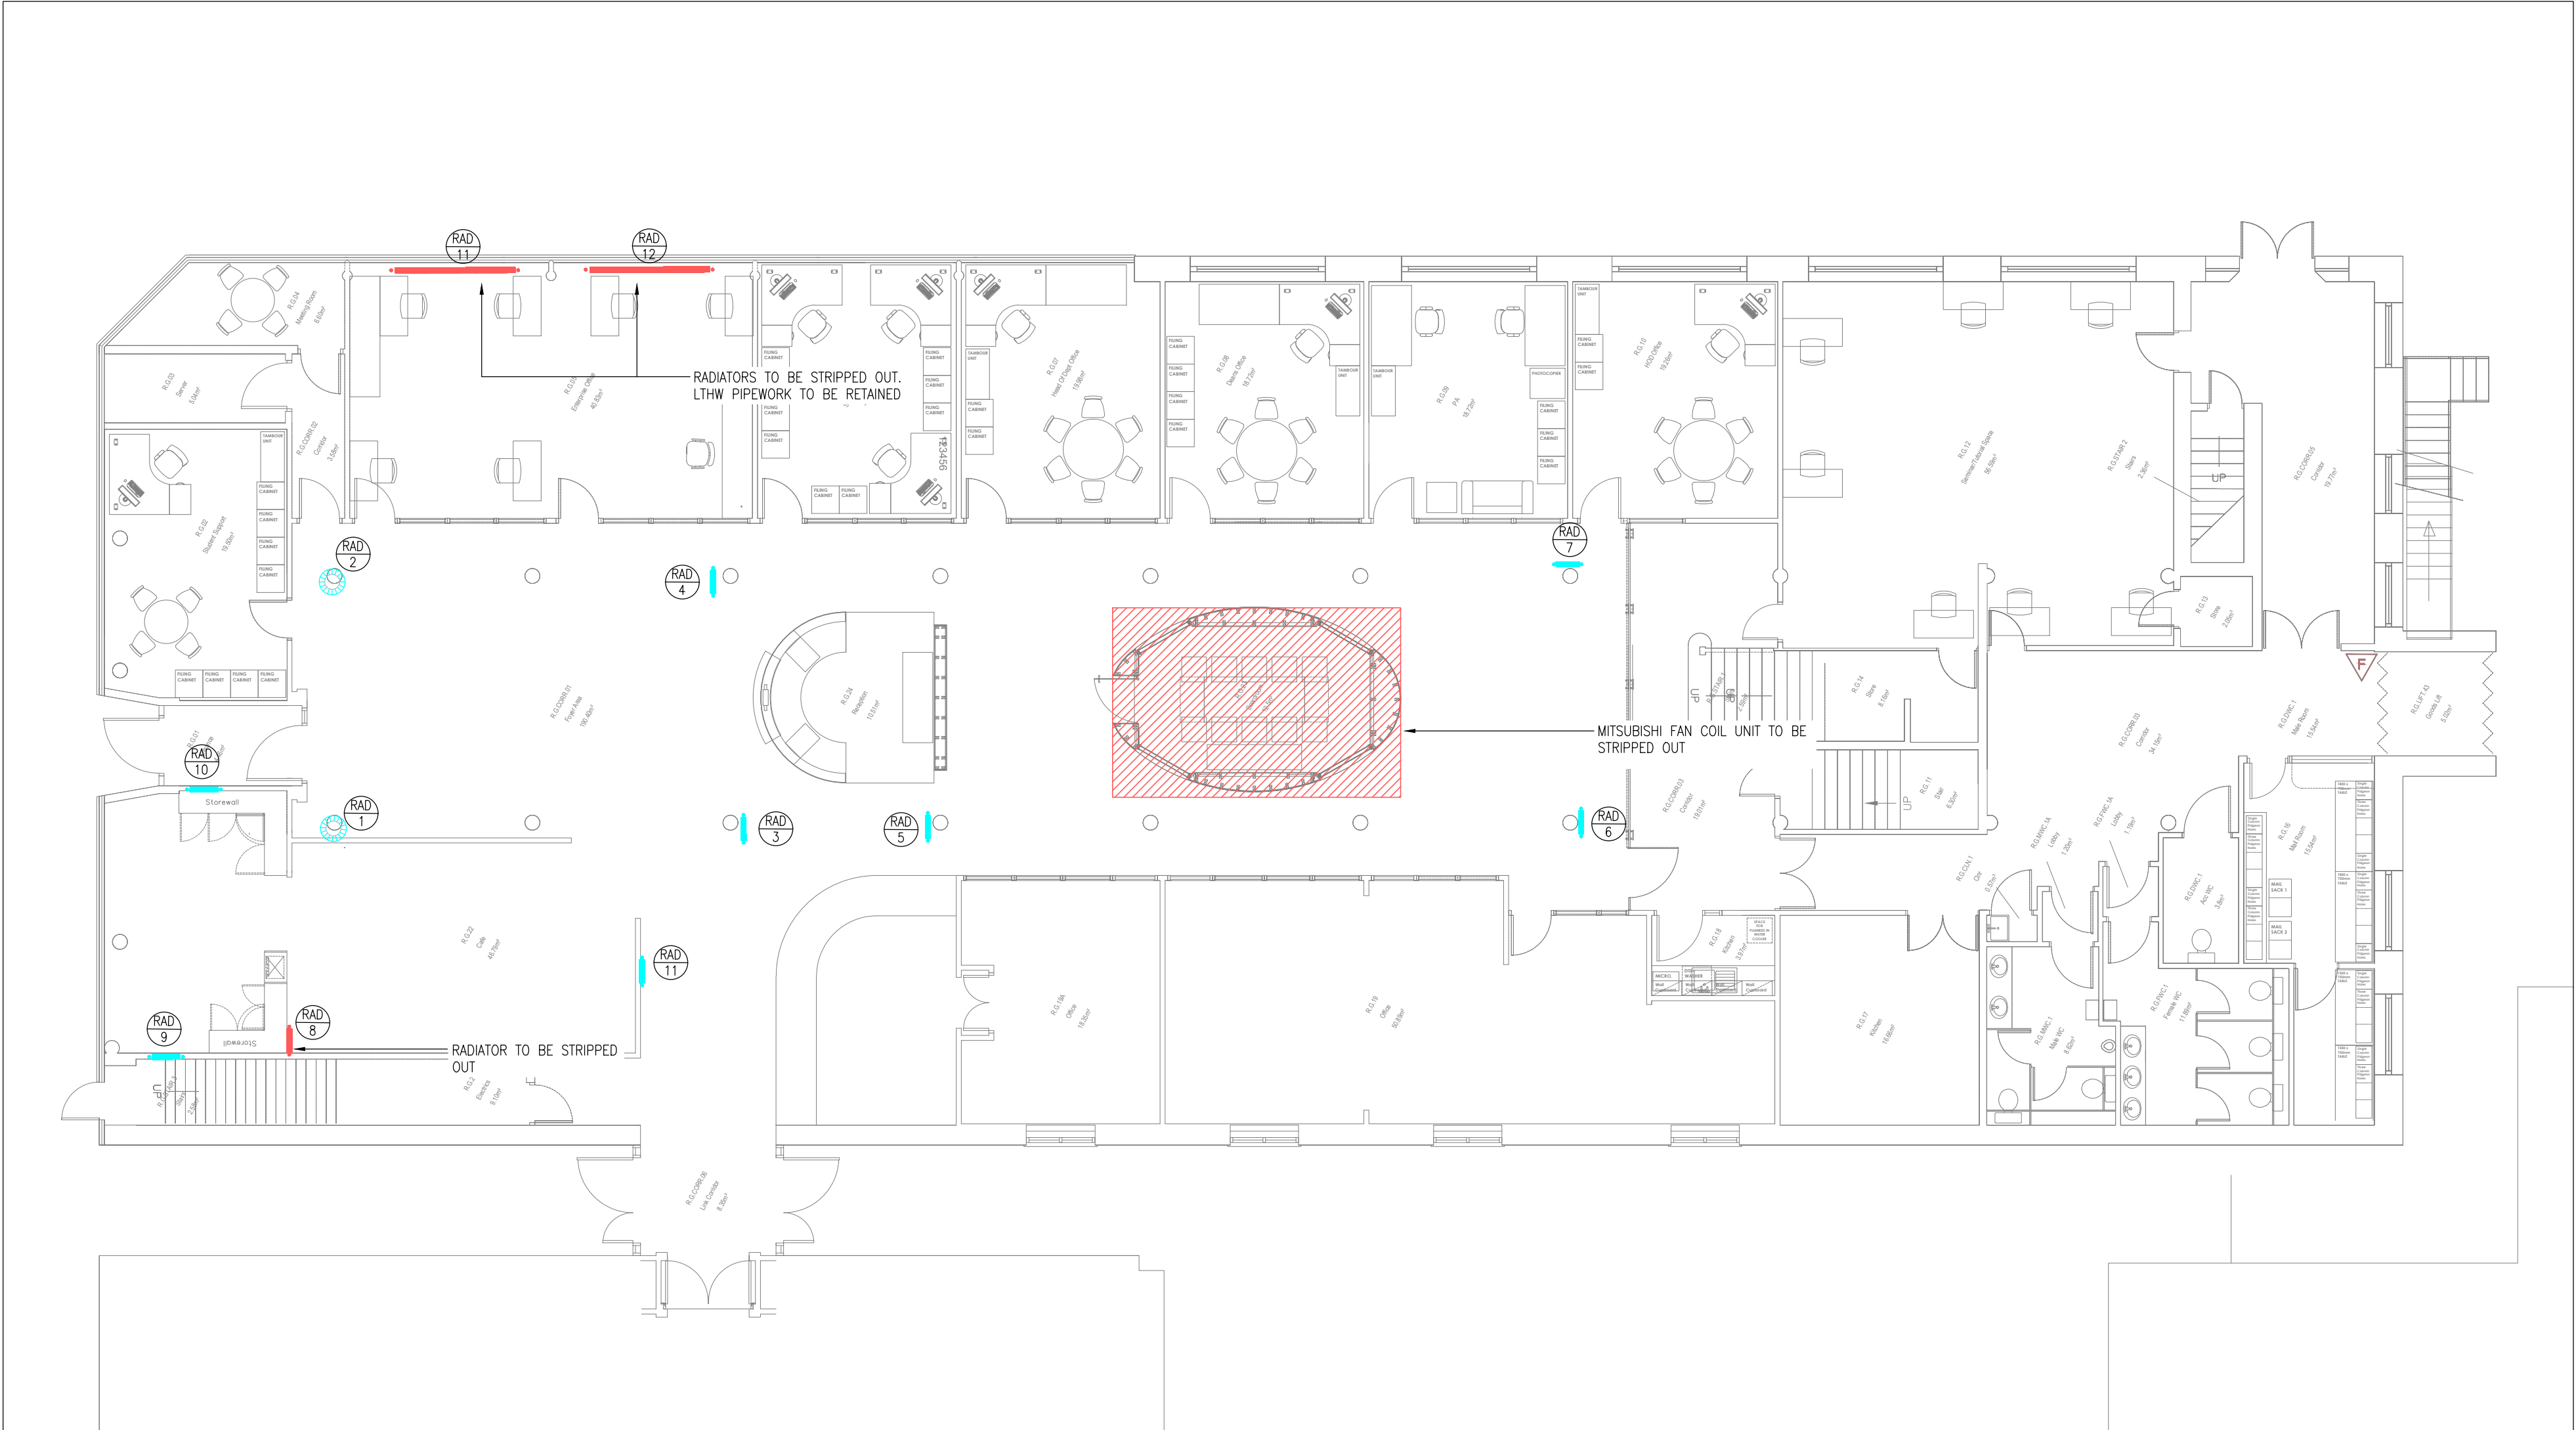

Date	Description	Rev	By
Revision Description			

consulting engineers

hulley & kirkwood

Manchester Office
2 Commercial Street
Castlefield
Manchester
M15 4RQ
Tel No: 0161 832 2030
E: hk.manchester@hulley.co.uk

...Making Buildings Work

Project:
MMU- Estates Projects

Drawing Title:
Mechanical Engineering Services
Righton Building
Existing Heating Strip Out Layout

Drawing Number:
50953(56)RIG-001

Revision:

Date: 01/04/2022
Scale: 1:100
Drawn By: T.Sugden
CAD Dwg File: 50953(56)RIG-001.dwg
Arch. Base Dwg:

Issue Status:

Tender