
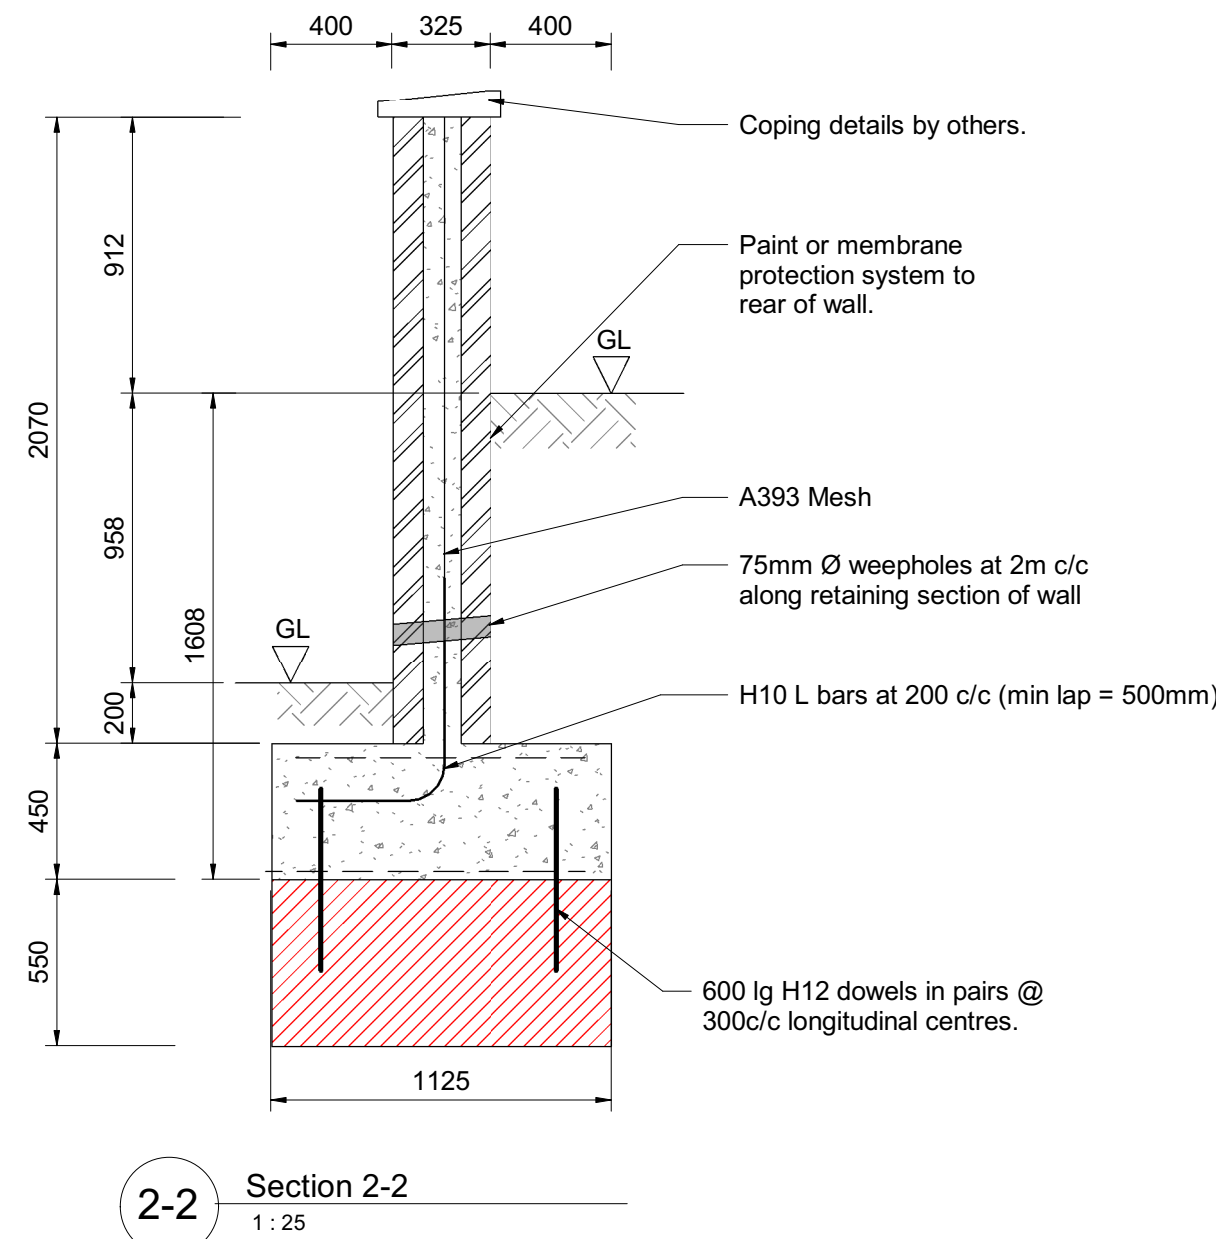
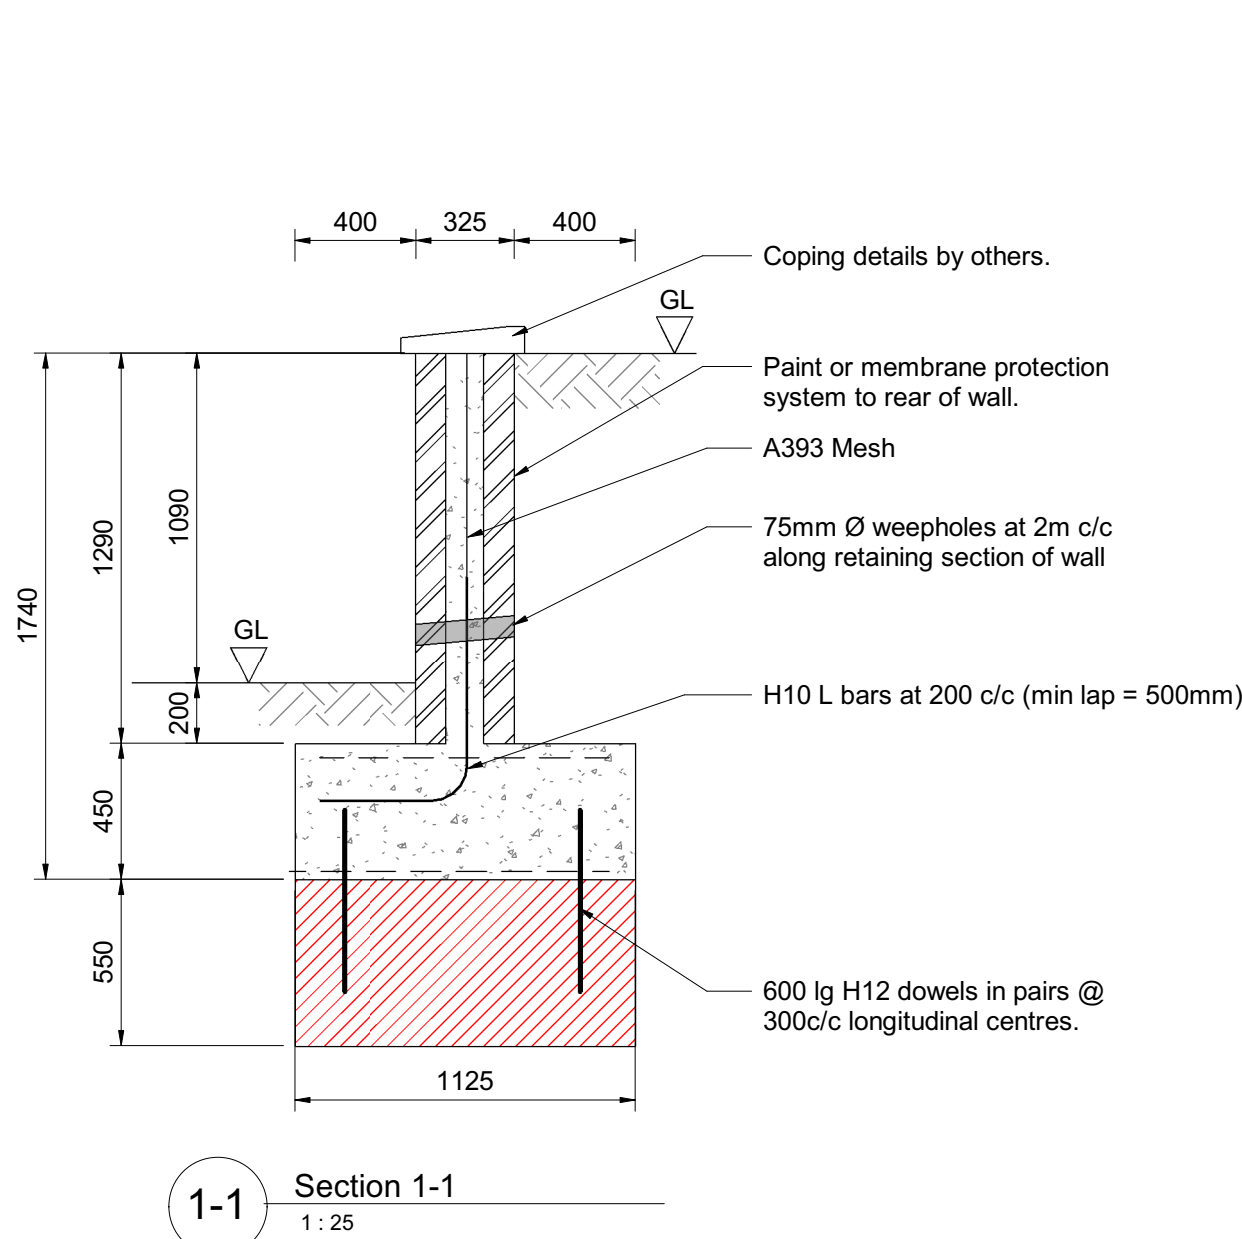


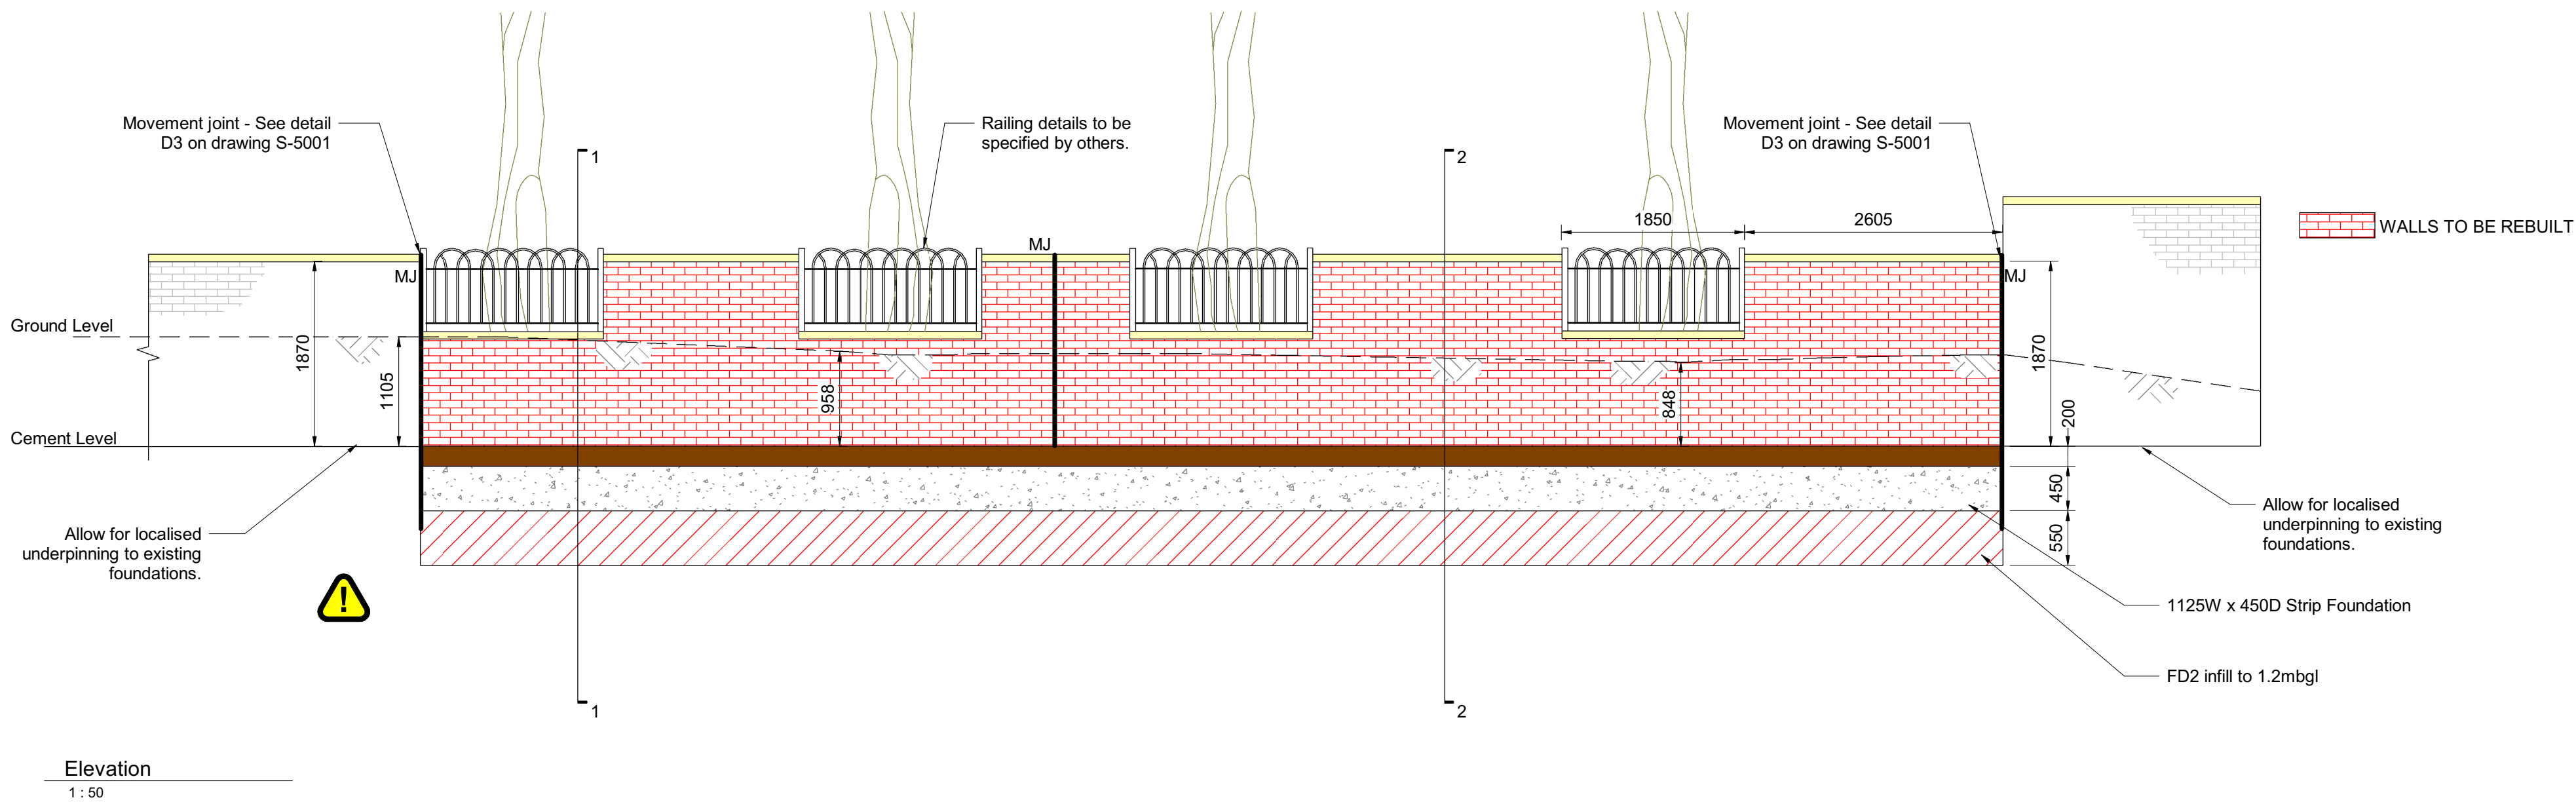

Masonry/ Retaining Wall Notes

- Carefully remove areas of masonry shown for down taking to foundation level.
- Areas of loose or defective brick to remaining sections of wall should be removed and made good. Defective mortar joints should be raked out, cleaned, and repointed in mortar to match existing. Header course capping to be frost resistant.
- Vegetation should be removed, and open joints raked out and repointed. All loose masonry to be removed and made good.
- Brickwork to be rebuilt in engineering brick to match existing. Brickwork to have minimum strength 70N/mm² and water absorption <7%. Durability designation FL. Contractor to submit details of proposed brickwork to match existing prior to construction. Retained coping stones and bricks should be reused to rebuild the new wall (if practicable).
- Any new coping to match existing. Coping stones fixed to wall using Ancon stone coping restraints OEA.
- Mortar to be in 1:1/4:3 cement:lime:mortar and to match existing in visual performance. Contractor to submit proposals.
- 125mm thk RC 30 concrete filled cavity wall to be filled in max 675mm deep pours as construction proceeds. 10mm aggregate to be used in concrete mix.
- 1No layer of Mesh BS ref A393. Min laps to be 600mm.
- Rear face of wall to be protected with bituminous paint or membrane protected by fibreboard or similar before back filling.
- 75mm Square weep holes at 2000mm c/c with a 25mm fall to the front.
- 250 long vertical twist fishtail stainless steel wall ties @ 450mm c/c vertically and horizontally.
- Mesh reinforcement BS Ref A393 for top and bottom of base with min. 50mm cover.
- H10 starter bars @ 200mm c/c lapped with wall mesh.
- Mass infill under base of main retaining wall structure to be done in FND2 concrete and keyed into retaining wall structure with pairs of H12 dowels @ 300c/c – 600lg with 300mm penetration into each section. Infill taken down to min. 1.2m below EGL in accordance with site investigation.
- Selected granular filling to rear of retaining wall.
- Movement joints in the masonry are to be provided @ 10.0m max. The first joint should be positioned @ 6.0m max from the end of the wall or 3 times the height of the wall, whichever is the lesser.

Downtakings

- All down-takings/demolition works to be carried out in accordance with BS 6187 and current HASW regulations
- Extreme care is to be taken when undertaking all down-takings to ensure, that the stability and integrity of the remaining structure is not comprised.
- The contractor shall be responsible for maintaining the stability and integrity of the existing and new structure for the duration of the works.
- All debris arising from down-takings shall be removed from site.
- Prior to carrying out the works, the contractor shall provide method statements detailing his proposals for propping the existing structure and installing the new supports
- Temporary works are the sole responsibility of the contractor. The contractor must design, supply and install all necessary temporary works required.

NO DIMENSIONS TO BE SCALED FROM THIS DRAWING

CDM - RESIDUAL HAZARDS The following are considered to be significant risks relevant to this drawing, which could not be fully mitigated or removed through design:

RISK IDENTIFICATION LEGEND	
01	TEMPORARY STABILITY - CONTRACTOR TO MAINTAIN STABILITY OF THE WALL IN THE TEMPORARY CASE DURING DOWNTAKINGS AND REBUILDING WORK. CONTRACTOR TO SUBMIT METHOD STATEMENT PRIOR TO WORKS.
02	CONTRACTOR TO PROVIDE METHOD STATEMENT FOR RETAINING GROUND IN TEMPORARY CONDITION.
03	CONTRACTOR TO MONITOR EXCAVATION AND ALLOW FOR DE-WATERING DURING CONSTRUCTION PHASE.
	Further possible control measures have been identified within the Design Risk Assessments which may help to mitigate these and other identified risks further during the construction / maintenance process.

General Notes

- All works to be carried out by a contractor experienced in this type of work.
- All levels are in metres, unless noted otherwise.
- All main heights to be confirmed by the contractor. Levels are tied into Ordnance Datum - Newlyn, unless noted otherwise. The contractor shall be responsible for establishing and checking the setting-out of gridlines, levels and datums.
- All dimensional information contained on Pick Everard drawings to be checked against the current architects drawings by the contractor prior to construction. All details which relate to existing features or boundaries are to be confirmed on site by the contractor.
- Any discrepancies found between drawings and/or site levels and datums. The contractor shall be responsible for ensuring the stability of the existing structure. In all cases the materials are required to be supplied and used in accordance with the appropriate codes of practice, a greement certificate, local building by-laws and in accordance with good building practice.
- Contractor to check all sizes prior to construction.
- Prior to any design change implemented by the contractor or client, the design team must be advised so that the change can be assessed and certified.

Health and Safety

- All construction operations shall be carried out in accordance with the requirements of the current CDM regulations, Health and Safety at Work Act, COSHH regulations and all other pertinent health and safety welfare legislation.

Construction (Design and Management) Regulations 2015 (CDM 2015)

Due to the 'commercial' nature of this project the Client has a duty under the Regulations to make suitable arrangements for managing a project and maintaining and reviewing these arrangements throughout, so the project is carried out in a way that manages Health and Safety risks. The Regulations also require the Client to notify the enforcing authority of certain construction projects. For projects involving more than one contractor, the Regulations require the Client to appoint a Principal Designer and a Principal Contractor, and make sure that they carry out their duties. Client duties are described in Part 2 of CDM 2015 and comprise:

- Regulation 4 Client duties in relation to managing projects.
- Regulation 5 Appointment of the Principal Designer and the Principal Contractor.
- Regulation 6 Notification.
- Health and Safety duties and roles are described in Part 3 of CDM 2015.

Existing dimensions are indicative and provided for information only. All existing dimensions to be confirmed on site by the contractor prior to work starting.

Note: Contractor to carry out local trial pitting to allow inspection of existing foundation by engineer prior to construction.

PO1 First Issue	22.06.22	EJF	HC8
Revision	Date	Drn	Chk
This document references the following files:-			
Reference Name	Status	Revision	
MAN024-PEV-XX-ZZ-M3-S-0001	S0	P01.01	

Client							
Manchester City Council							
Project							
Stenner Lane Retaining Wall							
Drawing Title							
Masonry Details							
Suitability Status							
S2 - Suitable for Information							
Job No.	Scale	Size	Rev				
210844	As indicated	@ A1	P01				
Drawing Number							
MAN024 - PEV - XX - ZZ - DR - S - 5901							
Client Code	Originator	Zone	Level	Type	Role	Number	

PICK
EVERARD

T 0345 045 0050 www.pick-everard.co.uk

This drawing is issued for the sole and exclusive use of the intended recipient and is subject to copyright in favour of Pick Everard. Pick Everard does not accept any responsibility or liability whatsoever for its use by a person other than the intended recipient.