



Registered Office:
Pollock Lifts, Unit1, Sloefield Drive,
Trooperslane Industrial Park,
Carrickfergus, County Antrim, BT38 8GX

Tel: 028 9336 8167
Fax: 028 9336 7846

Emma Berry
Manchester Council

Email: emma.berry@manchester.gov.uk
j.roberts@manchester.gov.uk
Craig.leedham@manchester.gov.uk
Sarah.piercey@manchester.gov.uk

20th May 2021

Dear Ms Berry,

Quotation Ref: KR 50156-21

Customer Information: 44 Esmond Road, Manchester, M8 9LZ

Further to your recent request for a quotation to supply & install a Pollock CLASSIC Independence Step Lift, we have pleasure in quoting as follows:

Supply, delivery and installation of a Pollock CLASSIC Independence Step Lift to the following specifications:

2 Step Bridge Unit with base handrails
Scissor frames and bellows (Rise 510mm)
Electric Hydraulic Power with Battery Back-up
Sensitive edges and Safety Switches
Aluminium Platforms – 800 x 1400mm with on-board ramp and aluminium checker plate flooring
Stainless steel handrails
Upper and lower call stations (keyed) lower call station post mounted
Safety shut off sensors
C.E. Approval
12 months parts & labour warranty
Safe working load 280Kgs
Colour coded aluminium post for lower call station
Install dedicated RCD protected circuit for lift
Extended warranty 2, 3, 4 & 5 years following installation
Planning, drawing & submission for approval
Silicone acrylic infill panels for stainless steel handrails



Pollock Lifts Ltd is a limited company registered in Northern Ireland
Company Number: NI 18971
VAT Number: 769009015
Registered Office:
1 Sloefield Drive, Troopers Lane Industrial Estate, Carrickfergus, Co Antrim, BT38 8GX



Building works:

1. Surface mounted call station fitted to hall wall away from the swing of the door.
2. Provide a dedicated power supply, terminating with a 13amp. Switched fused spur at low level (lift charger adjacent).
3. Remove the existing door and frame and fit new UPVC low threshold door and frame (specification to match existing as a minimum requirement), client to choose the door design.
4. Remove the existing step and build a single skin brick and flag threshold.
5. Provide 32mm ducting's for power supply and call stations, ducting's to have swept bends and draw cords.
6. Excavate the existing flagged path and lay new edging stones to retain the remaining flagged areas.
7. Lay a 2350mm x 1400mm x 100mm thick flat concrete base under lift position (level side to side, to fall away from lifting face, max. fall is 10mm over 2350mm).
8. Cut back the flower bed and relay some of the existing flags to create a safe step up to the front garden.
9. Lay concrete in front of the lift position graded to pavement level.
10. Pollock Classic step lift with Bridging steps, side rails with glazed panels, mechanical lower ramp, platform size 1400mm x 800mm and SWL 280 KG.

Options:

- | | |
|--|------|
| 1. On board ramp at lower level | Inc. |
| 2. 2 Step Bridge Unit with base handrails | Inc. |
| 3. Stainless steel handrails with silicone acrylic infill panels | Inc. |
| 4. Pollock Lift installation (inc.delivery from Stone) | Inc. |
| 5. Lower call station post mounted | Inc. |
| 6. 60 months parts & Labour warranty | Inc. |
| 7. Planning, drawing & submission for approval | Inc. |


Trusting that our quotation meets with your approval and that we may be of service. – If you wish to proceed with this quotation please forward your order to orders@pollocklifts.co.uk

Yours sincerely,

K Cameron

Chris Reid
Installations Manager

Cc. Kevin Ruttle – Area Sales Manager – Mob: 07866 477861

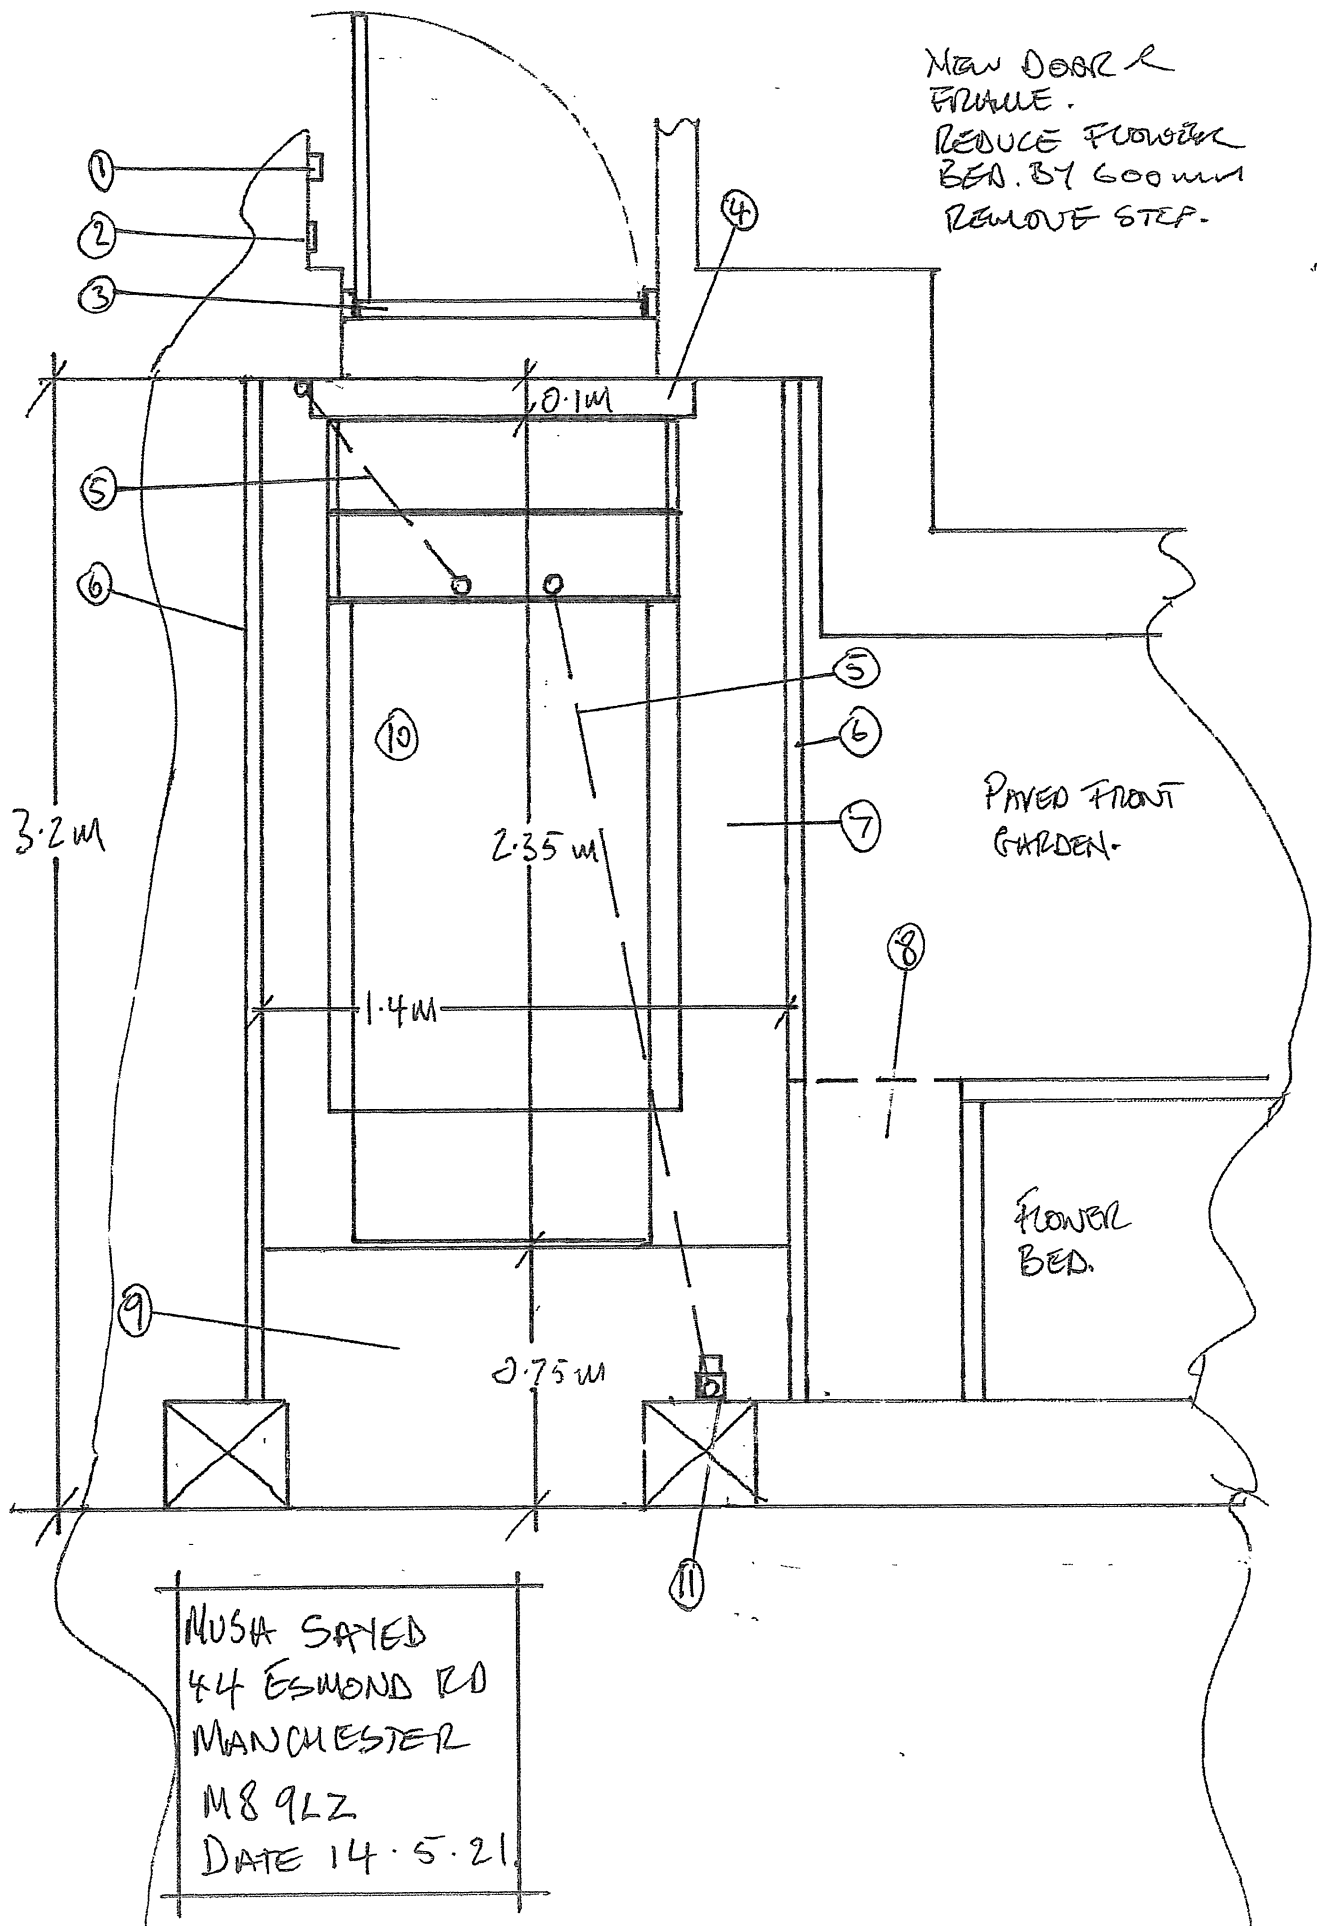

Musa Sayed

44 Esmond Rd



Manchester

M89LZ

Date 14.5.21.

1. Surface mounted call station fitted to hall wall away from the swing of the door.
2. Provide a dedicated power supply, terminating with a 13amp. Switched fused spur at low level (lift charger adjacent).
3. Remove the existing door and frame and fit new UPVC low threshold door and frame (specification to match existing as a minimum requirement), client to choose the door design.
4. Remove the existing step and build a single skin brick and flag threshold.
5. Provide 32mm ducting's for power supply and call stations, ducting's to have swept bends and draw cords.
6. Excavate the existing flagged path and lay new edging stones to retain the remaining flagged areas.
7. Lay a 2350mm x 1400mm x 100mm thick flat concrete base under lift position (level side to side, to fall away from lifting face, max. fall is 10mm over 2350mm).
8. Cut back the flower bed and relay some of the existing flags to create a safe step up to the front garden.
9. Lay concrete in front of the lift position graded to pavement level.
10. Pollock Classic step lift with Bridging steps, side rails with glazed panels, mechanical lower ramp, platform size 1400mm x 800mm and SWL 280 KG.

Table A		
ADJACENT SURFACE DISTANCE BS6446:2011	Part A: 100mm	Part B: 200mm
10 - 100	✓	✓
100 - 300	✓	✓
300 - 1000	✓	✓
1000 - 2000	✓	✓
2000 - 3000	✓	✓
3000 - 4000	✓	✓
4000 - 5000	✓	✓
5000 - 6000	✓	✓
6000 - 7000	✓	✓
7000 - 8000	✓	✓
8000 - 9000	✓	✓
9000 - 10000	✓	✓

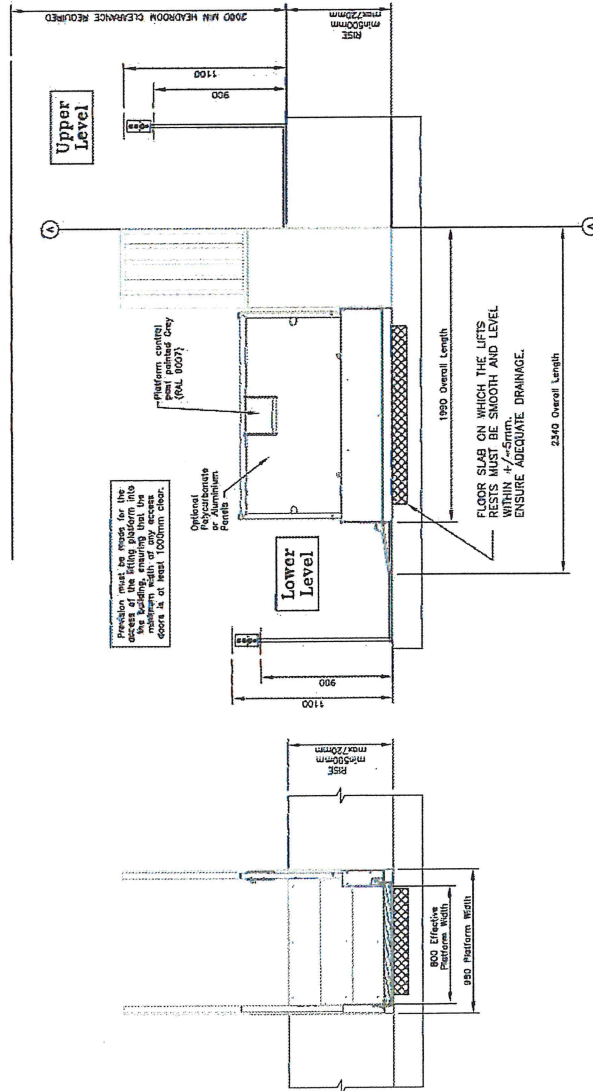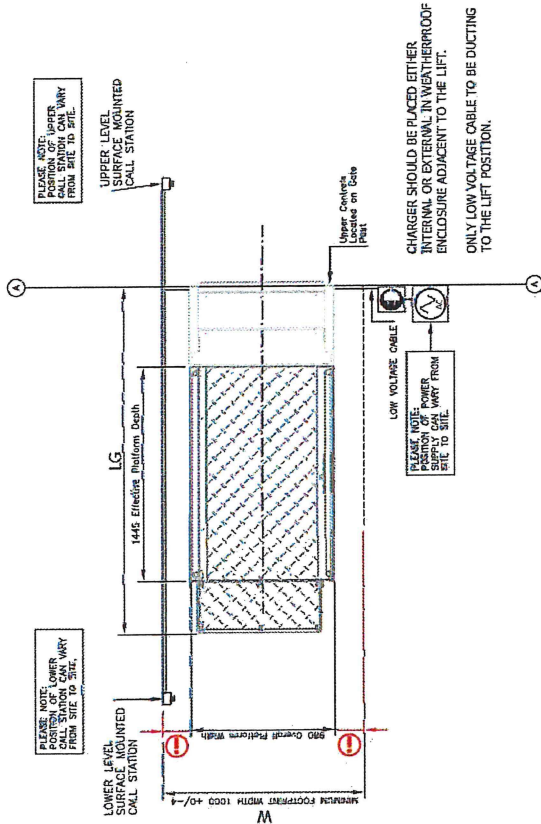

Change History Record		
Issue	CHANGE No.	DATE
A	1	24/02/14
B	2	24/02/20

Minimum Footprint Width (W)	1000mm
Minimum Ground Footprint Length (Lg)	2350mm
Minimum Upper Footprint Length (Lu)	1000mm

FOR EXTERNAL LIFT POWER SUPPLY
NEED TO BE LOCATED INSIDE BUILDING
AND DUCTED TO LIFT POSITION

BUILDERS WORK AND GENERAL NOTES - STEP LIFT

The customer is responsible for carrying out the work below. These are required for the lift to comply with the Supply of Machinery (Safety) Regulations 1992. If any points are not clear, please contact pollocklifts without delay.

1.0 GENERAL

- 1.1 Clear access into and through the building for the passage of the lift equipment and personnel must be maintained.
- 1.2 Unobstructed materials and store in a suitable dry and secure location within 5m of platform lift access. The materials must be stored in a secure location and not be accessible to the public and must be protected from weather and other conditions.

2.0 DIMENSIONS AND TOLERANCES

- 2.1 Do not scale from the drawings. All dimensions are in millimetres except where otherwise stated. All dimensions are to be measured from datum line AA.
- 2.2 Floor and side walls in the area where the platform lift is to be located must be firm, smooth level, suitably finished and have no projections or recesses across their face. Any walls surrounding the lift should be positioned as per Table A away from the lift edges in order to eliminate tripping hazards.
- 2.3 Make good where necessary around the platform lift and its associated equipment after they are finally positioned and fixed.

3.0 ELECTRICAL WORKS

- 3.1 Provide a 230V, 1 phase, 50 hertz, 3 wire permanent supply terminating in a fused spur 13A within close vicinity of the lift (within the fabric of the building + A 20mm Duct installed terminating at lift position as indicated). The switch SA Charging Circuit must be able to accept 1 x SA HRC fuses, GEC type 1 or equivalent fuses to BS88 Part 2.
- 3.2 For external installation it is recommended that lighting is provided controlled by PIR's.
- 3.3 The electrical work must comply with the latest revision of the IEE Wiring Regulations.
- 3.4 It is recommended that the supply is protected by a suitable RCD.
- 3.5 Where flush / surface mounted call stations are required, walls should be chased out prior to lift installation to allow for mounting of cable conduit and call panels. Client to make good after lift commissioning.

BUILDING WORK REQUIRED

- 1-
- 2-
- 3-
- 4-
- 5-
- 6-

APPROVED WORKING DRAWING

BY:..... COMP:.....

SIGNED:..... DATE:.....

NOTE: THE ABOVE BUILDING WORK MUST BE CARRIED OUT PRIOR TO THE LIFT INSTALLATION

LIFT DATA

PLATFORM SIZE	800W	THROUGH ACCESS	COLOUR 9007	FLOOR MOUNTED
UPPER GATE HANDED	N/A	----	----	----
LOWER GATE HANDED	N/A	----	----	----
LOWER LEVEL RAMP	ON BOARD RAMP	----	----	----
TRAVEL	(MIN 500mm MAX 720mm)	700mm TBC	----	----

COPYRIGHT



UNIT 1 SLOEFIELD DRIVE
CARRICKFERGUS
COUNTY ANTRIM
NORTHERN IRELAND
BT38 8GX
TEL: 00 44 (0) 28 93368167
WEB: WWW.POLLOCKLIFTS.CO.UK

UNIT: STEEPLIFT

NAME: CLASSIC 800W with 2 Bridging Step



40900351

1m Steplift 800W
1m Steplift 900W

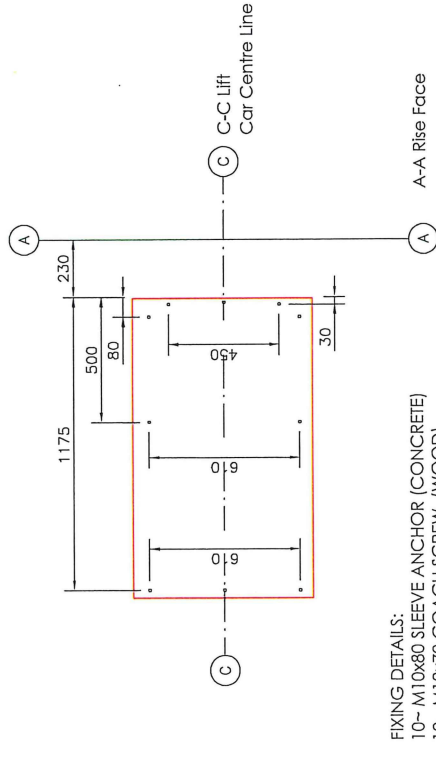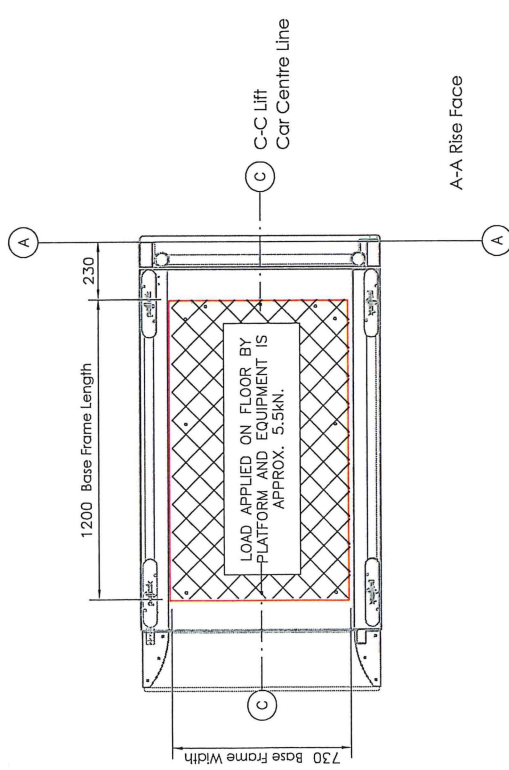

FIXING DETAILS:
10~ M10x80 SLEEVE ANCHOR (CONCRETE)
10~ M10x70 COACH SCREW (WOOD)


1m Steplift 1100W

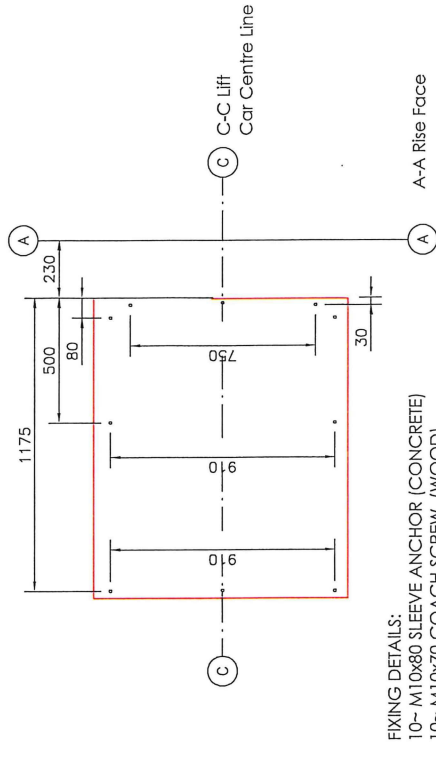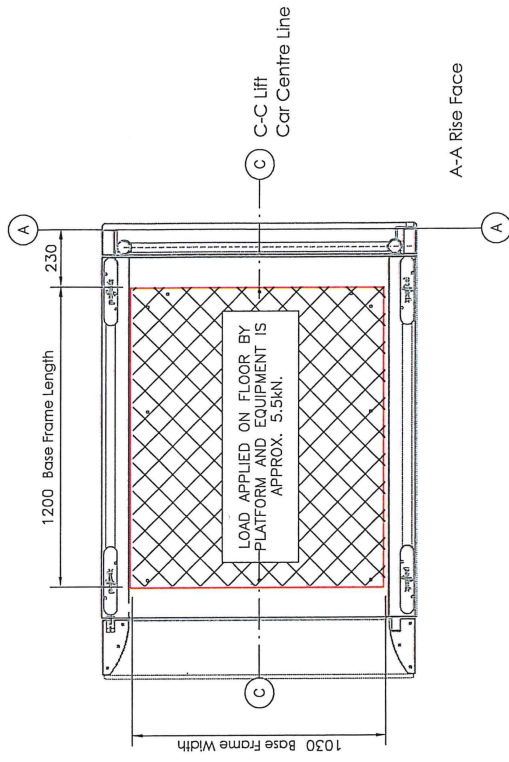

FIXING DETAILS:
10~ M10x80 SLEEVE ANCHOR (CONCRETE)
10~ M10x70 COACH SCREW (WOOD)

APPROVED WORKING DRAWING

COPYRIGHT



UNIT 1 SLOEFIELD DRIVE
CARRICKFERGUS
COUNTY ANTRIM
NORTHERN IRELAND
BT38 8GX
TEL: 00 44 (0) 28 93368167
WEB: WWW.POLLOCKLIFTS.CO.UK

UNIT: STEPLIFT

NAME: CLASSIC and EXECUTIVE - THRU ACCESS - BASE DRAWING

40900950

Change History Record			
Issue	CHANGE No.	DATE	INITIALS
A	---	27/01/14	TL
B	---	10/04/14	TL
C	CR0742	01/07/14	TL

BY:.....

COMP:.....

SIGNED:.....

DATE:.....

PLATFORM SIZE 800W / 900W / 1100W

TRAVEL (MIN 100mm MAX 1000mm)

mm TBC