



Prime Scaffold and
Structural Designs Limited

DESIGN CALCULATIONS

Date:	29/04/2022
Client:	Titchfield Group
Title:	Scaffold access
Site:	Fraser House, Manchester
Calculation No.	9989-1 D
Drawing No:	9989-1 D
Prepared By:	H. Byaruhanga
Checked By:	M.Nilforooshan



Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited    
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

CONTENTS PAGE

Page:

- 2 Contents Page
- 3 Design load information sheet
- 5 Design Risk Assessment
- 6 Design Calculations

Design Drawings:

9989-1 D

Super Stress Analysis:

NA

Appendix:

A *Wind Assessment*

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited f in @
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

DESIGN LOAD INFORMATION SHEET

Scaffold Tube

Tube refers to Type 4 steel galvanised scaffold tube conforming to BSEN39 with a minimum yield stress of 235N/mm², an outside diameter of 48.3mm with a wall thickness of 4.0mm.

Self weight	4.37kg/m	(As NASC TG20:21, Guide to good practice for scaffolding with tube and fittings, Table 5.9)
Moment Capacity	1.12kN.m	

Axial Load

Effective Length (Le)	Safe Axial Load (Pc)	(As NASC TG20:21, Guide to good practice for scaffolding with tube and fittings, Table 5.10)
(M)	(kN)	

1.20	51.90
1.40	45.30
1.60	39.20
1.80	33.70
2.00	29.10
2.20	25.30
2.40	22.00
2.60	19.30
2.80	17.10
3.00	15.20
3.20	13.60

All Tubes used in this design considered 'As New Tube'

Couplers

Type	SWL (kN)	Self weight (Kg)	(As NASC TG20:21, Guide to good practice for scaffolding with tube and fittings, Table 5.15)
Right Angle (Class A)	6.1	1.2	
Right Angle (Class B)	9.1	1.2	
Swivel Coupler (Class A)	6.1	1.2	
Swivel Coupler (Class B)	9.1	1.2	
Sleeve (Class A)	3.6 (T)		
Sleeve (Class B)	5.5 (T)		

Scaffold Boards

225 x 38mm timber scaffold boards (38-1.2m)

(As NASC TG20:21, Guide to good practice for scaffolding with tube and fittings, Table 5.8)

Moment Capacity	0.475kN.m	(Load Applied acts on an individual board)
	0.61kN.m	(Load Applied is spread uniformly across min of 4 boards)

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited f in @
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

Lattice Beams

Ladder Beam	<i>Restraints @ 1.2m Centres</i>	
Moment Capacity	12.5kN.m	
Shear Capacity	12.5kN	
Steel Unit Beam	<i>Restraints @ 1.2m Centres</i>	
Moment Capacity	27.7kN.m	
Shear Capacity	15.6kN	
Hakitec 750 Aluminium Beam	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	41.3kN.m	
Shear Capacity	30.6kN	
Selfweight	7.5Kg/m	
Dessa 780 Aluminium Beam	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	38.84kN.m	
Shear Capacity	23.71kN	
Selfweight	8.17Kg/m	
Dessa 790 Aluminium Beam	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	41.92kN.m	
Shear Capacity	23.71kN	
Selfweight	6.78kg/m	
Dessa 1300 Aluminium Beam	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	102.61kN.m	
Shear Capacity	42.1kN	
Selfweight	13.33Kg/m	
ASP/UBIX 780 Aluminium Beam	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	36.5kN.m	
Shear Capacity	30.7kN	
Selfweight	6.5Kg/m	
Apollo 750 X Beam Aluminium	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	37.0kN.m	Minimum values
Shear Capacity	35.0kN	Minimum values
Selfweight	6.7Kg/m	
Layher 750 Aluminium Beam	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	36.8kN.m	V' Arrangement
Shear Capacity	17.0kN	
Selfweight	6.5Kg/m	
Layher 450 Aluminium Beam	<i>Restraints @ 1.0m Centres</i>	
Moment Capacity	13.94kN.m	
Shear Capacity	12.32kN	
Selfweight	5.1Kg/m	

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited f in ig tw
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

FOR ALL BEAM TYPES - REFER TO MANUFACTURERS INFORMATION FOR MORE DETAILS

DESIGN RISK ASSESSMENT

Hazard Ref	Hazard Source	Risk Category	Preventive/Control Measures (See latest revisions/issue for all standards noted)	Residual Risk
1	Working at Height	HIGH RISK	Scaffolders must comply with procedures in NASC guidance SG4: as a minimum precaution. Approved method statement to outline a safe method of erection and dismantling of scaffold. Consider collective fall prevention measures ahead of personal fall arrest equipment. Scaffold Contractor to provide approved RAMS as outlined in NASC guidance SG7:	LOW RISK
2	Competence	HIGH RISK	Only competent ,trained persons should erect scaffold materials, this falls under the scaffold contractors area of responsibility .	LOW RISK
3	Manual Handling	HIGH RISK	The working area to be segregated and the manual handling regulations should be adhered to at all times by scaffolders, including correct lifting & lifting aid procedures in NASC guidance SG6:	LOW RISK
4	Erection/Dismantling /Altering	HIGH RISK	Only competent ,trained persons should Erect, Dismantle & Alter scaffold materials in accordance with NASC guidance SG4:, this falls under the scaffold contractors area of responsibility . Scaffold Contractor to consider protection to public and others during the scaffold works, see NASC guidance SG34: and TG20: Operational Guide.	LOW RISK
5	Electricity[man made/natural]	HIGH RISK	Only trained/competent persons are to install, use & maintain electrical equipment. The installation of earthing is also to be carried out by suitably qualified persons.	LOW RISK
6	Environmental Conditions	HIGH RISK	The scaffold contractor should make his own site specific risk assessment with the client as whether the scaffold can be used during periods of inclement weather, [wind, rain & snow].	LOW RISK
7	Fire Exposure	HIGH RISK	Ensure all personnel at site are aware of evacuation procedures/routes off the scaffold, clearly sign the fire escape route, consider erection of emergency stair tower exit.	LOW RISK
8	General Use/Loading	HIGH RISK	The design drawings will clearly indicate the loading limitations of the specific scaffold which should be adhered to at all times, any deviation must be at the consent of the scaffold contractor and/or PSD (south east) Ltd. An external assessment to be carried out to approve existing structure/foundation suitability.	LOW RISK
9	Materials	HIGH RISK	All materials must be checked prior to installation and should meet the requirements of TG20:	LOW RISK
10	Obstructions	HIGH RISK	A min. width of 600mm should be maintained on the working platform, free of obstacles & in accordance with BS EN 12811-1. Ensure clear and safe access is provided for scaffold erection and dismantling.	LOW RISK
11	Stability Issues	HIGH RISK	Attention must be given to anchor & kentledge details shown on the design drawings. Inspection of these two areas must be detailed ensuring correct installation & testing in accordance with NASC document TG4.	LOW RISK
12	Public	HIGH RISK	Sites are to be securely fenced off & appropriately protected to best prohibit access by the public to site. Scaffold Contractor to provide approved RAMS as outlined in NASC guidance SG7:	LOW RISK
13	Welfare/First Aid	HIGH RISK	All aspects of Health & Safety should be addressed by the main contractor in accordance with the Health & Safety Act. Site should always have first aiders & kit on site at all times.	LOW RISK

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited    	
Client:	Titchfield Group	Drawing No:	9989-1 D		
Title:	Scaffold access	Prepared By:	H. Byaruhanga		
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan		
	The Following symbol is used on Design Drawings to identify where residual risks remain in the scaffold design.	HIGH RISK	MEDIUM RISK	LOW RISK	
		ACTION TO BE TAKEN TO MITIGATE RISK	RISK TO BE NOTED WITHIN DESIGN	NO ACTION REQUIRED	

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com f in ig tw Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

1 General Information:

5-3 Access scaffold to be erected at Fraser House. Scaffold to be erected in accordance with TG20:21 and SG4:15.

Bridgings section by the entrances. All Beams to be laced & braced.

Scaffold to be tied back to the existing brick works.

2 Loading Considerations:

Maximum 2no working levels at any one time on access scaffold.

Load Class	=	4
1No. Working Level	=	3.00 kN/m ²
1No. Working Level	=	1.50 kN/m ²

Inside boards rated at 3.0kN/m² on 1no working level and 0.75kN/m² on 1no working level.

Loading Gantry rated at 10kN/m² on 1no working levels

Check concentrated load of 1.5kN on area of 500mm x 500mm

Self weight of boards @ 0.25kN/m²

Wind loads will be assessed on the scaffold in accordance with BSEN1991-1-4.


No snow loadings are to be allowed for or checked on the scaffold.

Combined selfweights and live loads will be checked in the supporting scaffold components.

3 Location:

Address: Portland St & Charlotte St corner, Manchester, M1 4GS

Grid reference = SJ842980

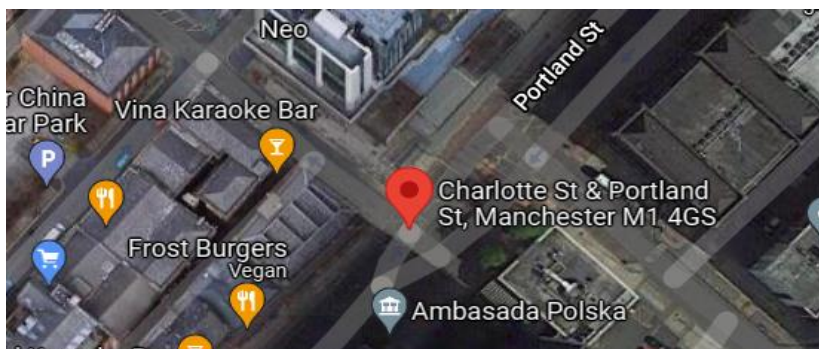

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

4 Scaffold Components

Max imposed load = 3.00 kN/m²

4.1 Boards

Scaffold Board Span = 0.9 m

Width = 0.225 m

Imposed load = 3 kN/m²

UDL = 0.675 kN/m

Weight of boarding = 0.5 kN/m²

UDL = 0.1125 kN/m

Total UDL = 0.79 kN/m

Concentrated load = 1.5 kN

Mo due to UDL = 0.7875*0.9*0.9/8

= 0.080 kNm

Mo due to Concentrated load = (1.5*0.9/4)+(0.1125*0.9*0.9/8)

= 0.349 kNm

RM of scaffold board = 0.475 kNm

0.475	≥	0.349	OK
-------	---	-------	----

TG20:21

4.2 Transoms

Transom Span = 1.9 m

Centres = 0.9 m

Imposed load = 3 kN/m²


UDL = 2.7 kN/m

Weight of boarding = 0.50 kN/m²

UDL = 0.45 kN/m

Total UDL = 3.15 kN/m

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited    
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

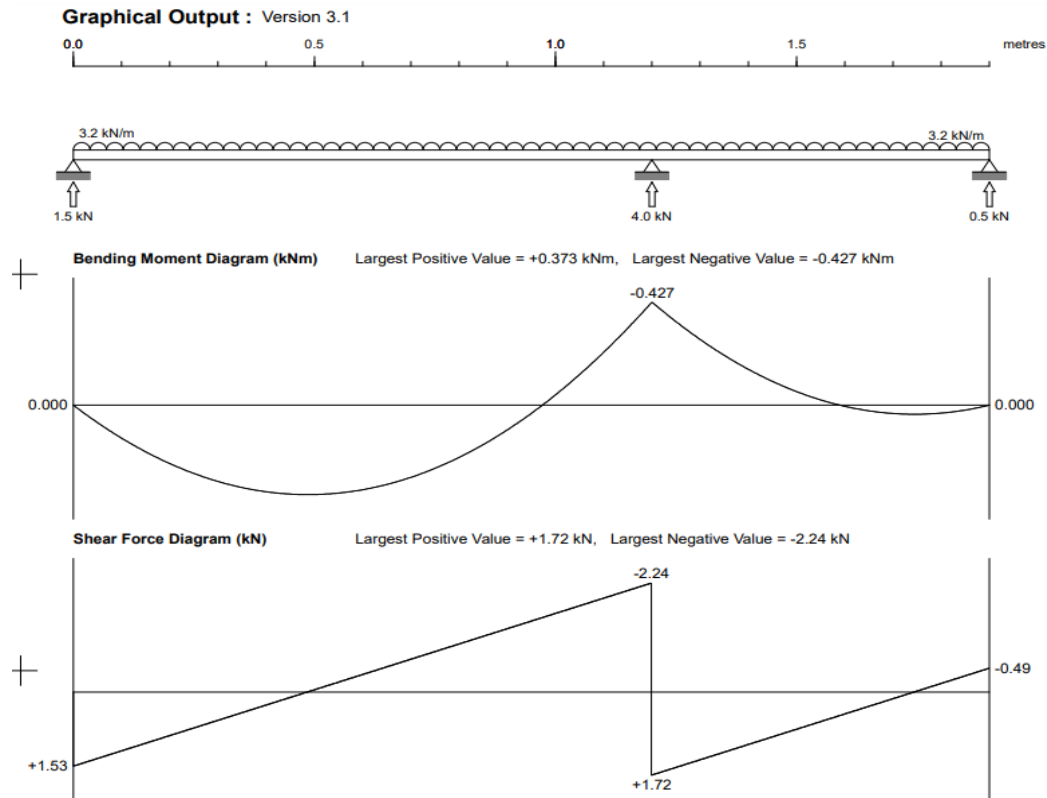

Max Mo = 0.43 kNm

RM of scaffold tube = 1.12 kNm

1.12	≥	0.43	OK
------	---	------	----

4.3 Ledgers (With Inside Board)

Max Ledger Span (L) = 1.8 m

Max Transom Span (L_t) = 1.20 m


Max Transom Centres (L_t) = 0.90 m

No. of Transoms per Ledger Span = 1 No.

Effective Platform Inside Width (L_{ib}) = 0.70 m

TG20:21

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited    
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

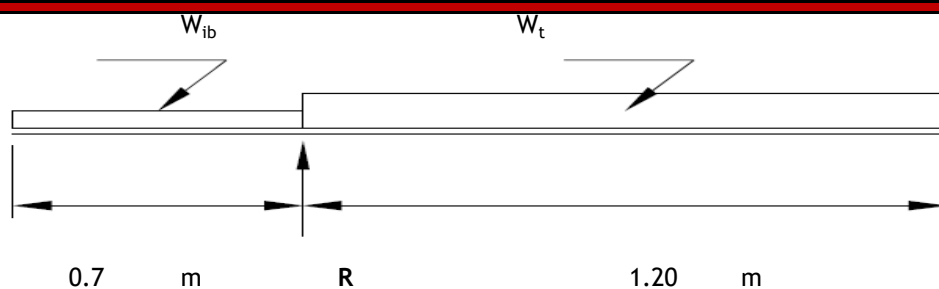

Reaction R at inside ledger:

$$R = 4.00 \text{ kN}$$

$$\begin{aligned} \text{Load from spur} &= 0.5 / \cos(20) \\ &= 0.47 \text{ kN} \end{aligned}$$

$$\text{Total Load} = 4.5 \text{ kN}$$

$$\text{Bending moment of the ledger} = 1.61 \text{ kN.m} \quad \text{As continues}$$

$$\text{BM Capacity in Type 4 Steel Tube} = 1.12 \text{ kNm} \quad (\text{As New Tube}) \quad [2no] \quad (\text{TG20:21})$$

2.24	≥	1.61 kNm	OK
------	---	----------	----

4.4 Connection

Ledger connection to standard is governed by the slip capacity of the couplers used.

$$\text{Load on Connection} = 4.47 \text{ kN}$$

$$\text{Capacity of Coupler} = 9.1 \text{ kN} \quad (\text{Class B})$$

9.1	≥	4.47 kN	OK
-----	---	---------	----

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

5.0 Leg Load

Scaffold Components				
Tube(kg/m)=	4.37			
Fittings(kg/fitt)=	1.50			
Boards(kg/m ²)=	25.00			
Scaffold Information per Lift				
Main Boards (no)=	5.00			
Inside Boards (no)=	3.00			
Width of scaffold (m) =	1.125			
Inside width (m) =	0.675			
Bay Length (m)=	2.00			
Lift Height (m)=	2.000			
Effective Lift Height (m)= 2.478				
Actual No of Lifts (no)=	9.00			
Boarded Lifts (no)=	10.00			
Working Lifts (no)=	2.00			
	1st	2nd	3rd	4th
Imposed Load on Main Run (kN/m ²)=	3.00	1.5		
Imposed Load on Inside Run (kN/m ²)=	3.00	0.75		
Inside Hand Rails (no)=	2.00			
Inside Toe board(no)=	1.00			
Outside Hand Rails (no)=	2.00			
Section Bracing (no)=	1.00			
Inner Sway Bracing (no)=	0.00			
Outer Sway Bracing (no)=	1.00			
Additional Inner Leg Load (kN)=	0.00			
Additional Outer Leg Load (kN)=	0.00			
Main Frame				
	Tub.Fit.	Boards	Imposed	Total
Total Inner Leg Load (kN)=	5.92	7.17	10.13	23.22
Total Outer Leg Load (kN)=	6.12	3.86	5.06	15.05

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

6.0 Leg Load

Scaffold Components				
Tube(kg/m)=	4.37			
Fittings(kg/fitt)=	1.50			
Boards(kg/m ²)=	25.00			
Scaffold Information per Lift				
Main Boards (no)=	5.00			
Inside Boards (no)=	3.00			
Width of scaffold (m) =	1.125			
Inside width (m) =	0.675			
Bay Length (m)=	2.00			
Lift Height (m)=	2.000			
Effective Lift Height (m)=	2.478			
Actual No of Lifts (no)=	8.00			
Boarded Lifts (no)=	9.00			
Working Lifts (no)=	2.00			
	1st	2nd	3rd	4th
Imposed Load on Main Run (kN/m ²)=	3.00	1.5		
Imposed Load on Inside Run (kN/m ²)=	3.00	0.75		
Inside Hand Rails (no)=	2.00			
Inside Toe board(no)=	1.00			
Outside Hand Rails (no)=	2.00			
Section Bracing (no)=	1.00			
Inner Sway Bracing (no)=	0.00			
Outer Sway Bracing (no)=	1.00			
Additional Inner Leg Load (kN)=	0.00			
Additional Outer Leg Load (kN)=	0.00			
	Main Frame			
	Tub.Fit.	Boards	Imposed	Total
Total Inner Leg Load (kN)=	5.28	6.46	10.13	21.86
Total Outer Leg Load (kN)=	5.46	3.48	5.06	14.00


7.0 Beam Check: 750 Apollo X-Beam

Inside Beam

Effective Beam Length	=	6.00	m	
Beam Span	=	5.00	m	
Beam Centres	=	1.20	m	c/c
Self Weight of Beam	=	0.07	kN/m	(Excluding Bracing/Ties)
Additonal Load from Lacing + Bracing	=	0.20	kN/m	(Including Fittings)
Total Beam UDL	=	0.27	kN/m	

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

Graphical Output : Version 3.1

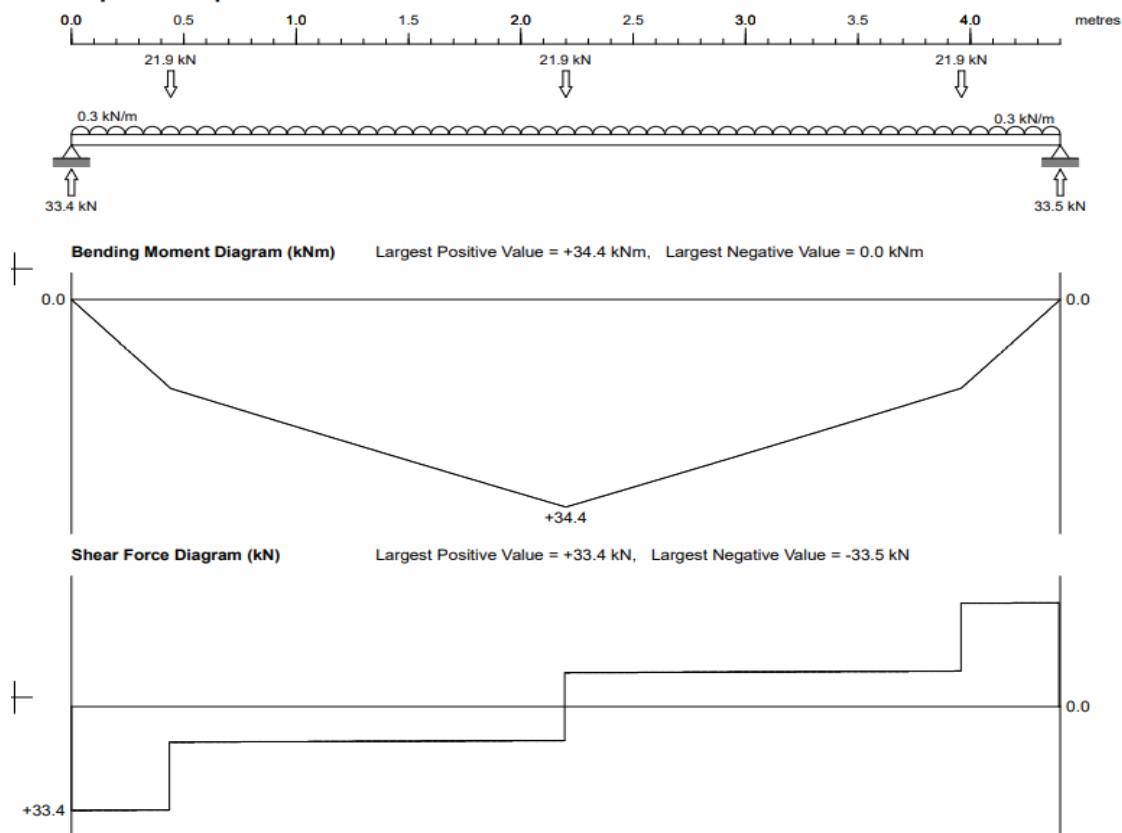

Max Moment = 34.4 kNm

Max Shear = 33.4 kN

750 Apollo X-Beam		Restraints @ 1.0m Centres		Triple Beam
Moment Capacity	37.00	kNm	>	25.50 OK
Shear Capacity	35.00	kN	>	24.80 OK

7.1 Supporting Reactions

Reaction into Support = 33.40 kN

Standard to Beam connection is limited to slip capacity of the coupler used.

Capacity of Coupler = 9.1 kN (Class B) (4No.)

36.4	≥	33.40	kN	OK
------	---	-------	----	----

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com f in @
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

Prime Scaffold and
Structural Designs Limited

7.2 Leg Load

Self-weight of Leg	=	0.50	kN	
Reaction into Support	=	33.40	kN	
Total Axial Load	=	33.90	kN	
Effective length of Scaffold tube	=	2500	mm	
Axial Load Capacity	=	20.53	kN	(2No.)

(TG20:21)

41.06	≥	33.90	kN	OK
-------	---	-------	----	----

8.0 Loading Gantry

8.1 Scaffold Boards

Scaffold Board Span	=	0.3	m	
Width	=	0.225	m	
Imposed load	=	10	kN/m ²	
UDL	=	2.25	kN/m	
Weight of boarding	=	0.5	kN/m ²	
UDL	=	0.1125	kN/m	
Total UDL	=	2.36	kN/m	
Concentrated load	=	1.5	kN	
Mo due to UDL	=	2.3625*0.3*0.3/8		
	=	0.027	kNm	
Mo due to Concentrated load	=	(1.5*0.3/4)+(0.1125*0.3*0.3/8)		
	=	0.114	kNm	
RM of scaffold board	=	0.475	kNm	

TG20:21

0.475	≥	0.114	OK
-------	---	-------	----

8.2 Transoms

Transom Span	=	1.6	m	
Centres	=	0.3	m	
Imposed load	=	10	kN/m ²	
UDL	=	3	kN/m	
Weight of boarding	=	0.5	kN/m ²	

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	



UDL = 0.15 kN/m

Total UDL = 3.15 kN/m

Concentrated load = 1.5 kN

Mo due to UDL = $3.15 \times 1.6 \times 1.6 / 8$
= 1.01 kNm

Mo due to Concentrated load = $(1.5 \times 1.6 / 4) + (0.15 \times 1.6 \times 1.6 / 8)$
= 0.65 kNm

RM of scaffold tube = 1.12 kNm

TG20:21

1.12	≥	1.01	OK
------	---	------	----

8.3 Beam Analysis

Span Max. = 1.6 m

L = 7.8 m

Imposed load = 10 kN/m²

Weight of boarding = 0.5 kN/m²

Total = 10.5 kN/m²


UDL = $(10.5 \times 1.6 / 2)$
= 8.4 kN/m

Beam self weight = 0.25 kN/m

Total UDL = 8.65 kN/m

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com f in @
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

Graphical Output : Version 3.1

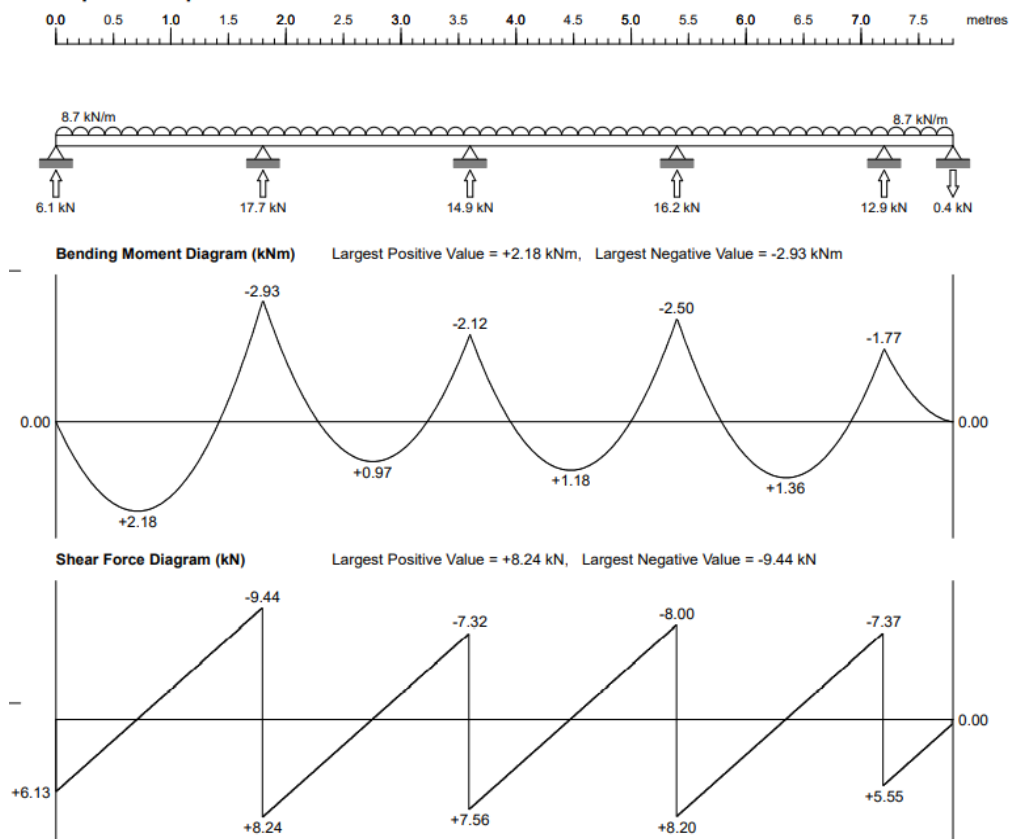

Max Moment = 2.9 kNm

Max Shear = 9.4 kN

Ladder Beams	Restraints @ 1.2m Centres	
Moment Capacity	12.5kNm	OK
Shear Capacity	12.5kN	OK

Connection check:

Max reaction from beam = 17.70 kN

Standard to Beam connection is limited to slip capacity of the coupler used.

Capacity of Coupler = 9.1 kN (Class B) (4no.)

36.40 kN	>	17.70 kN	OK
----------	---	----------	----

8.4 Leg Load

Self-weight of Leg = 15.10 kN

Reaction into Support = 17.70 kN

Total Axial Load = 32.80 kN

TG20:21

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

Effective length of Scaffold tube = 2500 mm

Axial Load Capacity = 20.53 kN (2No.) (TG20:21)

41.06	≥	32.80 kN	OK
-------	---	----------	----

9.0 Roof Access

9.1 Lifting beam

Lifting load = 2.00 kN

Self-weight of beam = 0.10 kN/m

Beam Span = 3.00 m

Max Moment = 1.61 kNm

Max Shear = 1.15 kN

Ladder Beams		Restraints @ 1.2m Centres	
Moment Capacity	12.5kNm		OK
Shear Capacity	12.5kN		OK

9.2 Lifting beam tube support

Reaction from beam = 1.15 kN

Tube Span = 1.80 m

Max Moment = 0.52 kNm

BM Capacity in Type 4 Steel Tube = 1.12 kNm (As New Tube) (TG20:21)

1.12	≥	0.52 kNm	OK
------	---	----------	----

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

9.3 Leg Load

LEG LOAD					
Scaffold Components					
Tube(kg/m)=	4.37				
Fittings(kg/fitt)=	1.50				
Boards(kg/m ²)=	25.00				
Scaffold Information per Lift					
Main Boards (no)=	5.00				
Inside Boards (no)=	3.00				
Width of scaffold (m) =	1.2				
Inside width (m) =	0.75				
Bay Length (m)=	1.80				
Lift Height (m)=	2.000				
Effective Lift Height (m)=	-				
Actual No of Lifts (no)=	2.00				
Boarded Lifts (no)=	1.00				
Working Lifts (no)=	1.00				
	1st	2nd	3rd	4th	5th
Imposed Load on Main Run (kN/m ²)=	3.00				
Imposed Load on Inside Run (kN/m ²)=	0.75				
Inside Hand Rails (no)=	2.00				
Inside Toe board(no)=	1.00				
Outside Hand Rails (no)=	0.00				
Section Bracing (no)=	1.00				
Inner Sway Bracing (no)=	0.00				
Outer Sway Bracing (no)=	1.00				
Additional Inner Leg Load (kN)=	0.00				
Additional Outer Leg Load (kN)=	0.00				
	Main Frame				End Frame
	Tub.Fit.	Boards	Imposed	Total	Total
Total Inner Leg Load (kN)=	1.36	0.65	3.95	5.95	3.43
Total Outer Leg Load (kN)=	0.98	0.35	3.04	4.37	2.57

Max Leg load = 5.95 kN

Reaction from support tube = 0.58 kN

Total load = 6.53 kN

10.0 Stability

Scaffold to be tied to the existing structure.

Dynamic pressure from wind = Metspec design suit used

BSEN1991-1-4

Location = Fraser House, Manchester

Grid reference = SJ842980

Probability Factor = 0.83

Peak Velocity Pressure = 0.442 kN/m²

Appendix A

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

Cpe (-Ve) parallel = 1.2 [Average]

Cpe (+Ve) windward = 0.8

Cpe (-Ve) leeward = 0.5

CpNet = 1.3

Scaffold solidity = 100% [Sheeted]

Design Wind Pressure = 0.57

Coverage area = 2.00 m X 4.00 m

= 8.00 m²

Tensile Load per tie = 4.60 kN

10.1 Ties

Type of Anchor: HILTI HUS3-H/HF SCREW ANCHOR 10mm NCC

Base Material = Brick

Minimum Embedment = 85.00 mm

Tensile Load = 4.60 kN

Tensile Capacity of Anchor = 13.20 kN (1No.)

13.20	≥	4.60 kN	OK
-------	---	---------	----

Pull Out Test (F.O.S 1.25)

Pull Out Test = 5.75 kN

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com Prime Scaffold and Structural Designs Limited f in @
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

11 Structure Summary

Scaffold should be erected in accordance with TG20:21 and SG4:15.

Care must be taken to install correct number of uprights at indicated positions.

Care must be taken to install ties at indicated positions using load bearing couplers at all times.

Plan bracing to be installed as indicated on the drawing

All beams are installed with lacing & bracing

Tie loads have been indicated on drawing / calcs. Main contractor to ensure structure is capable of withstanding loads imposed.

Point loads have been indicated on drawing / calcs. Main contractor to ensure structure is capable of withstanding loads imposed.

Refer to design drawing 9989-1 D for details.

END OF CALCULATIONS

Date:	29/04/2022	Calculation No.	9989-1 D	 Tel: 0207 403 2994 Web: www.psd.uk.com     Prime Scaffold and Structural Designs Limited
Client:	Titchfield Group	Drawing No:	9989-1 D	
Title:	Scaffold access	Prepared By:	H. Byaruhanga	
Site:	Fraser House, Manchester	Checked By:	M.Nilforooshan	

Appendix A: Wind Assessment

Wind Assessment to BS EN 1991-1- 4

Data Entry:-			
SiteAltitude	50.000 m	ReferenceHeight(Z)	SizeEffectDimension(b+h)
V _{b,map}	21.500 m/s	Roof 16.500 m	Roof 0.000 m
SeasonaFactor(C,season)	1.000	SideWalls 16.500 m	SideWalls 0.000 m
ProbabilityFactor(C,prob)	0.830	Gables 16.500 m	Gables 0.000 m
SiteID	SJ842980		

Dynamic Pressure Results

WindDirection(deg)	0	30	60	90	120	150	180	210	240	270	300	330
DirectionFactorC _{dir}	0.78	0.73	0.73	0.74	0.73	0.80	0.85	0.93	1.00	0.99	0.91	0.82
OrographyFactorC _o	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
Effective Height (h-h _{dis})m	Roof	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300
	Sides	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300
	Gable	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300	13.300
Altitude FactorC _{alt}	Roof	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045
	Sides	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045
	Gable	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045	1.045
Roughness FactorC _r	Roof	0.810	0.805	0.804	0.807	0.800	0.800	0.799	0.800	0.809	0.816	0.807
	Sides	0.810	0.805	0.804	0.807	0.800	0.800	0.799	0.800	0.809	0.816	0.807
	Gable	0.810	0.805	0.804	0.807	0.800	0.800	0.799	0.800	0.809	0.816	0.807
Exposure FactorC _e	Roof	2.037	2.011	2.005	2.022	1.983	1.983	1.976	1.983	2.033	2.074	2.078
	Sides	2.037	2.011	2.005	2.022	1.983	1.983	1.976	1.983	2.033	2.074	2.078
	Gable	2.037	2.011	2.005	2.022	1.983	1.983	1.976	1.983	2.033	2.074	2.078
V _b (m/s)	Roof	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473
	Sides	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473
	Gable	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473	22.473
V _t (m/s)	Roof	14.549	13.616	13.616	13.803	13.616	14.922	15.854	17.347	18.652	18.466	16.974
	Sides	14.549	13.616	13.616	13.803	13.616	14.922	15.854	17.347	18.652	18.466	16.974
	Gable	14.549	13.616	13.616	13.803	13.616	14.922	15.854	17.347	18.652	18.466	16.974
V _m (m/s)	Roof	11.782	10.964	10.949	11.139	10.900	11.945	12.674	13.886	15.089	15.068	13.860
	Sides	11.782	10.964	10.949	11.139	10.900	11.945	12.674	13.886	15.089	15.068	13.860
	Gable	11.782	10.964	10.949	11.139	10.900	11.945	12.674	13.886	15.089	15.068	13.860
Turbulence IntensityI _v	Roof	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260
	Sides	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260
	Gable	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260	0.260
PeakVelocity Pressurep _p (kN/m ²)	Roof	0.269	0.233	0.232	0.241	0.230	0.277	0.312	0.374	0.442	0.440	0.373
	Sides	0.269	0.233	0.232	0.241	0.230	0.277	0.312	0.374	0.442	0.440	0.373
	Gable	0.269	0.233	0.232	0.241	0.230	0.277	0.312	0.374	0.442	0.440	0.373
SizeEffect FactorC _s	Roof	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
	Sides	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000
	Gable	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000	1.000