


- NOTES
1. All dimensions are in millimetres unless otherwise stated
 2. This drawing is to be read with all other relevant documentation
 3. Do not scale from this drawing, all measurement data should be taken directly from the model

KEY TO DRAWING

- 100mm sub-mains cable medium duty tray
50mm medium duty tray for intruder alarm cables
150mm basket for data cables
Mini trunking for fire alarm

GENERAL INSTALLATION NOTES

1. THIS DRAWING IS USED FOR GUIDANCE PURPOSES ONLY. IT IS A GENERIC DRAWING THAT HAS BEEN ADAPTED TO SUIT THE REQUIREMENTS OF THE INSTALLATION AND SHOWS THE CONCEPTS RATHER THAN THE EXACT WIRING REQUIRED.
2. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH MANCHESTER CITY COUNCIL STANDARD ELECTRICAL SPECIFICATION FOR ELECTRICAL SERVICES AND ALL ASSOCIATED CIVILS, MECHANICAL OR OTHER RELEVANT DRAWINGS AND SPECIFICATIONS.
3. THE EXACT LOCATIONS OF ALL PROPOSED ELECTRICAL INSTALLATIONS/EQUIPMENT SHALL BE FINALISED AND AGREED ON SITE WITH THE MAIN CONTRACTOR AND CONTRACT ADMINISTRATOR.
4. DISTANCES, CLEARANCES AND CABLE LENGTHS SHOULD BE CHECKED ON SITE AND NOT SCALED FROM THIS DRAWING.
5. ALL PROPOSED ELECTRICAL INSTALLATIONS SHALL BE INSTALLED IN STRICT ACCORDANCE WITH BS7671 (LATEST AMENDMENT).
6. ALL MAIN EQUIPOTENTIAL BONDING AND SUPPLEMENTARY BONDING SHALL BE CARRIED OUT IN ACCORDANCE WITH THE REQUIREMENTS OF THE CURRENT EDITION OF THE IET WIRING REGULATIONS (BS7671) AND ANY SPECIFIC REQUIREMENT OF THE LOCAL SUPPLY AUTHORITY. ALL ITEMS OF ELECTRICAL DISTRIBUTION EQUIPMENT WITHIN THE CUBICLES AND ALL METALLIC CONTAINMENT SHALL BE BONDED TO THE MAIN EARTHING CONNECTION POINT.
7. THE CONTRACTOR SHALL PROVIDE ALL NECESSARY FIRE STOPPING AS REQUIRED.
8. CONTAINMENT RUNS SHALL BE CONFIRMED ON SITE. ALL SURFACE CLIPPED CABLE ROUTES SHALL BE AGREED BEFORE INSTALLATION.
9. THE CONTRACTOR SHALL DEVELOP ALL NECESSARY SECONDARY CONTAINMENT REQUIRED TO FORM A COMPLETE CABLE CONTAINMENT SYSTEM.
10. FIRE ALARM MINI TRUNKING TO BE FIXED AT HIGH LEVEL IN THE MAIN LIBRARY AREA ABOVE THE COVERING.
11. CABLE TRAY AND BASKET SHALL BE INSTALLED WITHIN THE SUB-FLOOR. AS INDICATED, THE CONTRACTOR SHALL SURVEY AND CONFIRM THE SUB-FLOOR ROUTES BEFORE WORKS COMMENCE IN ORDER TO VERIFY ACCESS AND EXTENT OF SUB-FLOOR AREA.

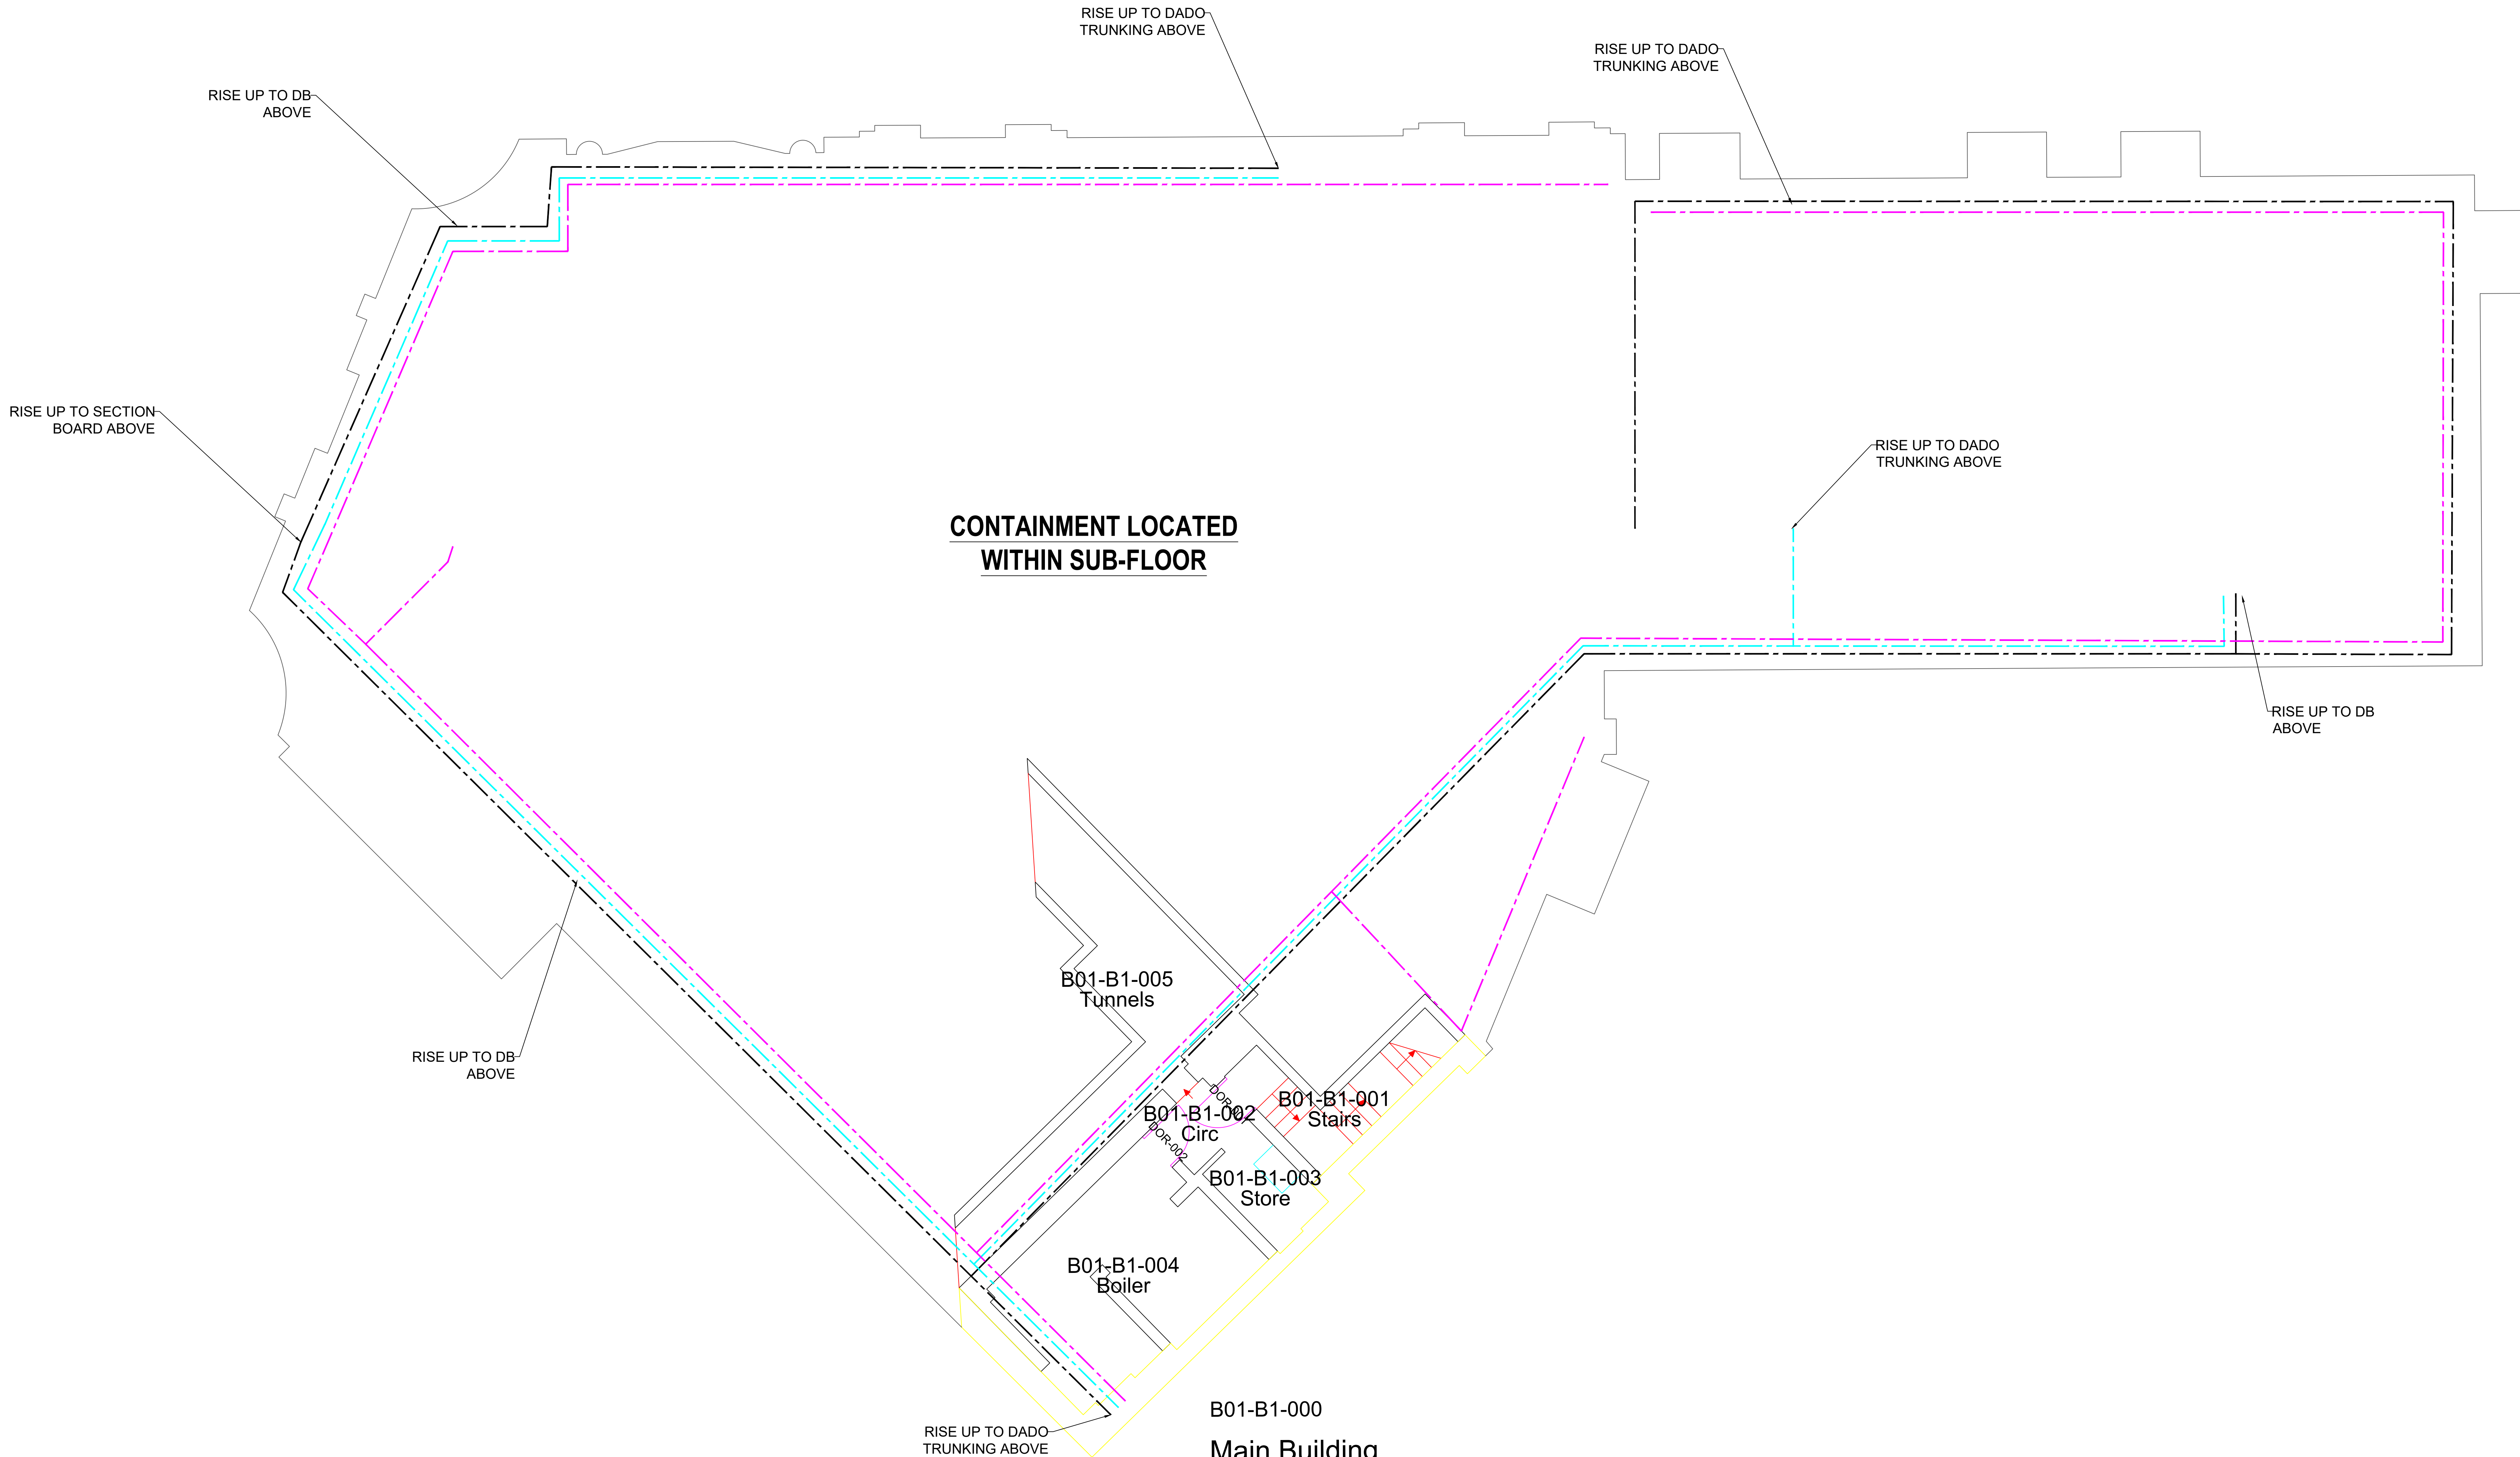

No part of this drawing or data file may be reproduced without prior written permission of the Manchester City Council or approved representative.

1:50
0 1m 2m 3m 4m 5m



Capital Programmes Division
Manchester City Council
PO Box 532, Town Hall
Manchester
M60 2LA

DRAWING STATUS INFORMATION

PROPERTY TITLE
Chorlton District Library
Manchester Road, Chorlton
M21 9PN

UPRN
010023047970

PROJECT TITLE
Open Libraries

DRAWING TITLE
Proposed Basement Containment Layout

JOB NO.
LG44705.1

DATE
16.05.22

SCALE
1:50@A0

DRAWING NO.
MCC-B01-B1-DR-E-0051