


- PLANTING NOTES**
1. Plant handling at the nursery, and during transit up to delivery, shall be in accordance with 'Plant Handling' the booklet published by the Committee for Plant Supply and Establishment (CPSE). The contractor shall comply with clauses 3 & 4 of the above booklet (obtained from the Horticulture Trades Association) which refers to the receipt, unloading and temporary storage of plants.
2. Plants shall be first class examples of their species or variety, free from all pests and diseases with good fibrous root systems and materially undamaged. (Refer to relevant sections of BS3936 Parts 1-10 'Specification of Nursery Stock')
3. All planting is to be in general compliance with BS4428: 1989 'Code of Practice for general landscape operations (excluding hard surfaces)'.
4. All trees are to be staked and secured:
i) All semi-mature trees are to be underground guyed using a triple stake and approved anchor fixing system
5. The contractor must ascertain for himself the exact location of any underground services and maintenance points.
6. At the time of planting, areas will be covered by an approved depth of topsoil:
i) Topsoil to shrub areas to be 300mm deep
ii) Topsoil to tree pits to be 300mm deep plus 600mm subsoil
Imported topsoil is to be approved via a sample delivery and soil testing results in accordance with the requirements of BS3882:2015 prior to installation
7. Water as necessary to ensure the establishment and continued thriving of planted and grassed matter.
8. Carry out all work when soil and weather conditions are suitable:
i) Do not plant during periods of frost or strong winds. Plant only during the following periods
- Bare root deciduous trees and shrubs: Late October to late March
- Container grown plants: At any time if ground water and weather conditions are favourable.
Ensure that adequate watering and weed control is available.
- Bulbs- autumn.
9. All planting areas are to be mulched to a consolidated depth of 50mm using approved Grade A Amenity Bark.

WORKMANSHIP AND MAINTENANCE GENERALLY
All works will be subject to the following British Standards :-

- Construction:**
BS 4428 : 1989 General Landscape Operations
BS 3936 : Part 1 2013 Nursery Stock (Specification for trees and shrubs)
BS 3936 : Part 4 2013 Nursery Stock (Specification for forest trees)
BS 3936 : Part 9 2013 Nursery Stock (Specification for bulbs, corms and tubers)
BS 3936 : Part 10 2013 Nursery Stock (Specification for ground cover plants)
BS 5837 : 2012 Trees in Relation to Construction
BS 3882 : 2015 Topsoil
BS 4043 : 1989 Transplanting root based trees
BS 5236 : 1975 Cultivating and planting advance nursery stock
- Maintenance:**
BS 7370:part1: 1991 Grounds maintenance (part 1. Recommendations for establishing and managing grounds maintenance organisations and design considerations
BS 7370:part2: 1994 Grounds maintenance part 2. Recommendations for the maintenance of hard areas (excluding sports surfaces)
BS 7370:part3: 1991 Grounds maintenance part 3. Recommendations for maintenance of amenity and functional turf (other than sports turf)
BS 7370:part4: 1993 Grounds maintenance part 4. Recommendations for maintenance of soft landscape (other than amenity turf)

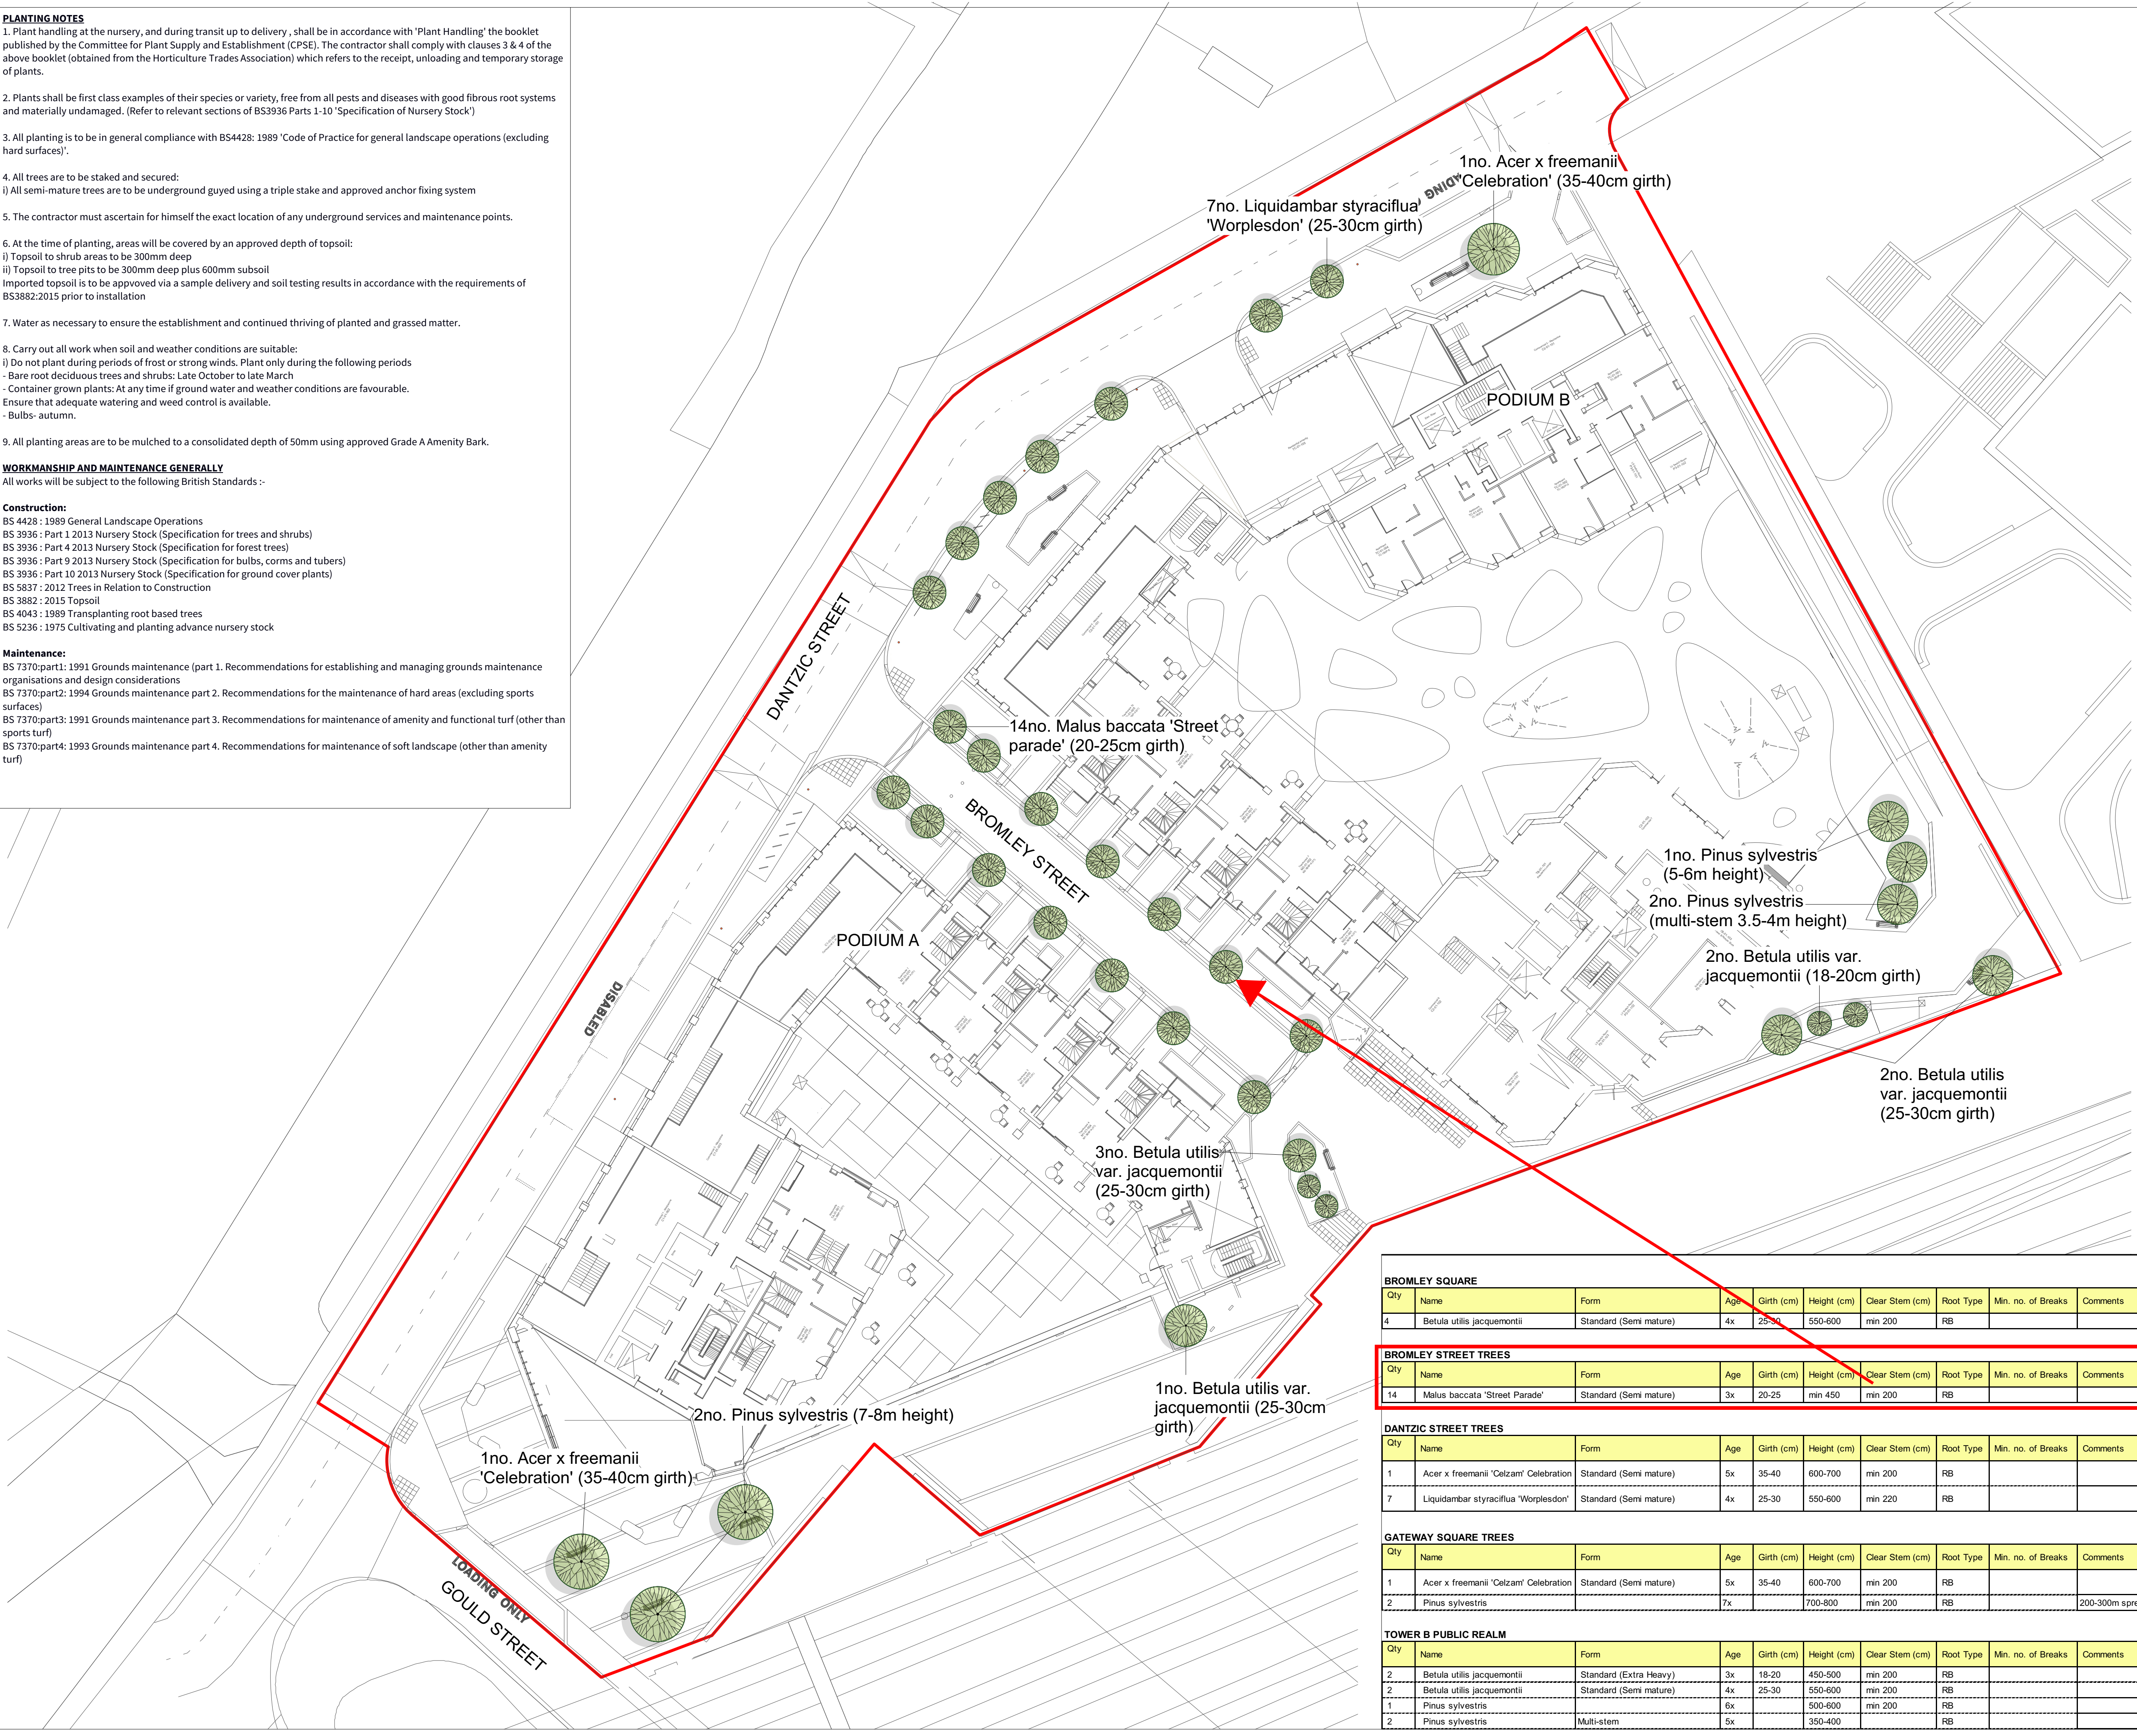

BROMLEY SQUARE									
Qty	Name	Form	Age	Girth (cm)	Height (cm)	Clear Stem (cm)	Root Type	Min. no. of Breaks	Comments
4	Betula utilis jacquemontii	Standard (Semi mature)	4x	25-30	550-600	min 200	RB		

BROMLEY STREET TREES									
Qty	Name	Form	Age	Girth (cm)	Height (cm)	Clear Stem (cm)	Root Type	Min. no. of Breaks	Comments
14	Malus baccata 'Street Parade'	Standard (Semi mature)	3x	20-25	min 450	min 200	RB		

DANTZIC STREET TREES									
Qty	Name	Form	Age	Girth (cm)	Height (cm)	Clear Stem (cm)	Root Type	Min. no. of Breaks	Comments
1	Acer x freemanii 'Celzam' Celebration	Standard (Semi mature)	5x	35-40	600-700	min 200	RB		
7	Liquidambar styraciflua 'Worplesdon'	Standard (Semi mature)	4x	25-30	550-600	min 220	RB		

GATEWAY SQUARE TREES									
Qty	Name	Form	Age	Girth (cm)	Height (cm)	Clear Stem (cm)	Root Type	Min. no. of Breaks	Comments
1	Acer x freemanii 'Celzam' Celebration	Standard (Semi mature)	5x	35-40	600-700	min 200	RB		
2	Pinus sylvestris		7x		700-800	min 200	RB		200-300m spread

TOWER B PUBLIC REALM									
Qty	Name	Form	Age	Girth (cm)	Height (cm)	Clear Stem (cm)	Root Type	Min. no. of Breaks	Comments
2	Betula utilis jacquemontii	Standard (Extra Heavy)	3x	18-20	450-500	min 200	RB		
2	Betula utilis jacquemontii	Standard (Semi mature)	4x	25-30	550-600	min 200	RB		
1	Pinus sylvestris		6x		500-600	min 200	RB		
2	Pinus sylvestris	Multi-stem	5x		350-400		RB		

THIS DRAWING IS COPYRIGHT PROTECTED AND MAY NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN AUTHORITY FROM THE OWNER.

- NOTES:**
- Do not scale from this drawing.
 - Always work to noted dimensions.
 - All dimensions are in millimetres unless otherwise stated.
 - All setting out, levels and dimensions to be agreed on site.
 - The dimensions of all materials must be checked on site before being laid out.
 - This drawing must be read with the relevant specification clauses and detail drawings.
 - Order of construction and setting out to be agreed on site.

Red line boundary

S4-P02 06-11-20 Tender AT GB
S4-P01 23-10-20 Tender AT GB

Revision	Date	Description	Drawn	Apprvd.
----------	------	-------------	-------	---------

Planit I.E. Limited
E: info@planit-ie.com W: planit-ie.com
MANCHESTER
2 Back Grafton St, Altrincham, WA14 1DY
T: 0161 928 9281
LONDON
Unit 6 Waterside, 44-48 Wharf Road, London, N1 7UX
T: 0207 253 5678
LIVERPOOL
No. 8 Princes Parade, Princes Dock, Liverpool, L3 1DL
T: 0151 705 6746

Client FEC
Project Victoria Riverside Northern Gateway
Drg Title Tree planting off-podium

Created on 23.10.20 Created by HT Approved by GB
Scale 1:250 Size A1 Workstage Tender

Drg No. 1768.1-PLA-XX-XX-DR-L-2005 Suitability S4 Revision P02