


NOT FOR CONSTRUCTION

For Final Review

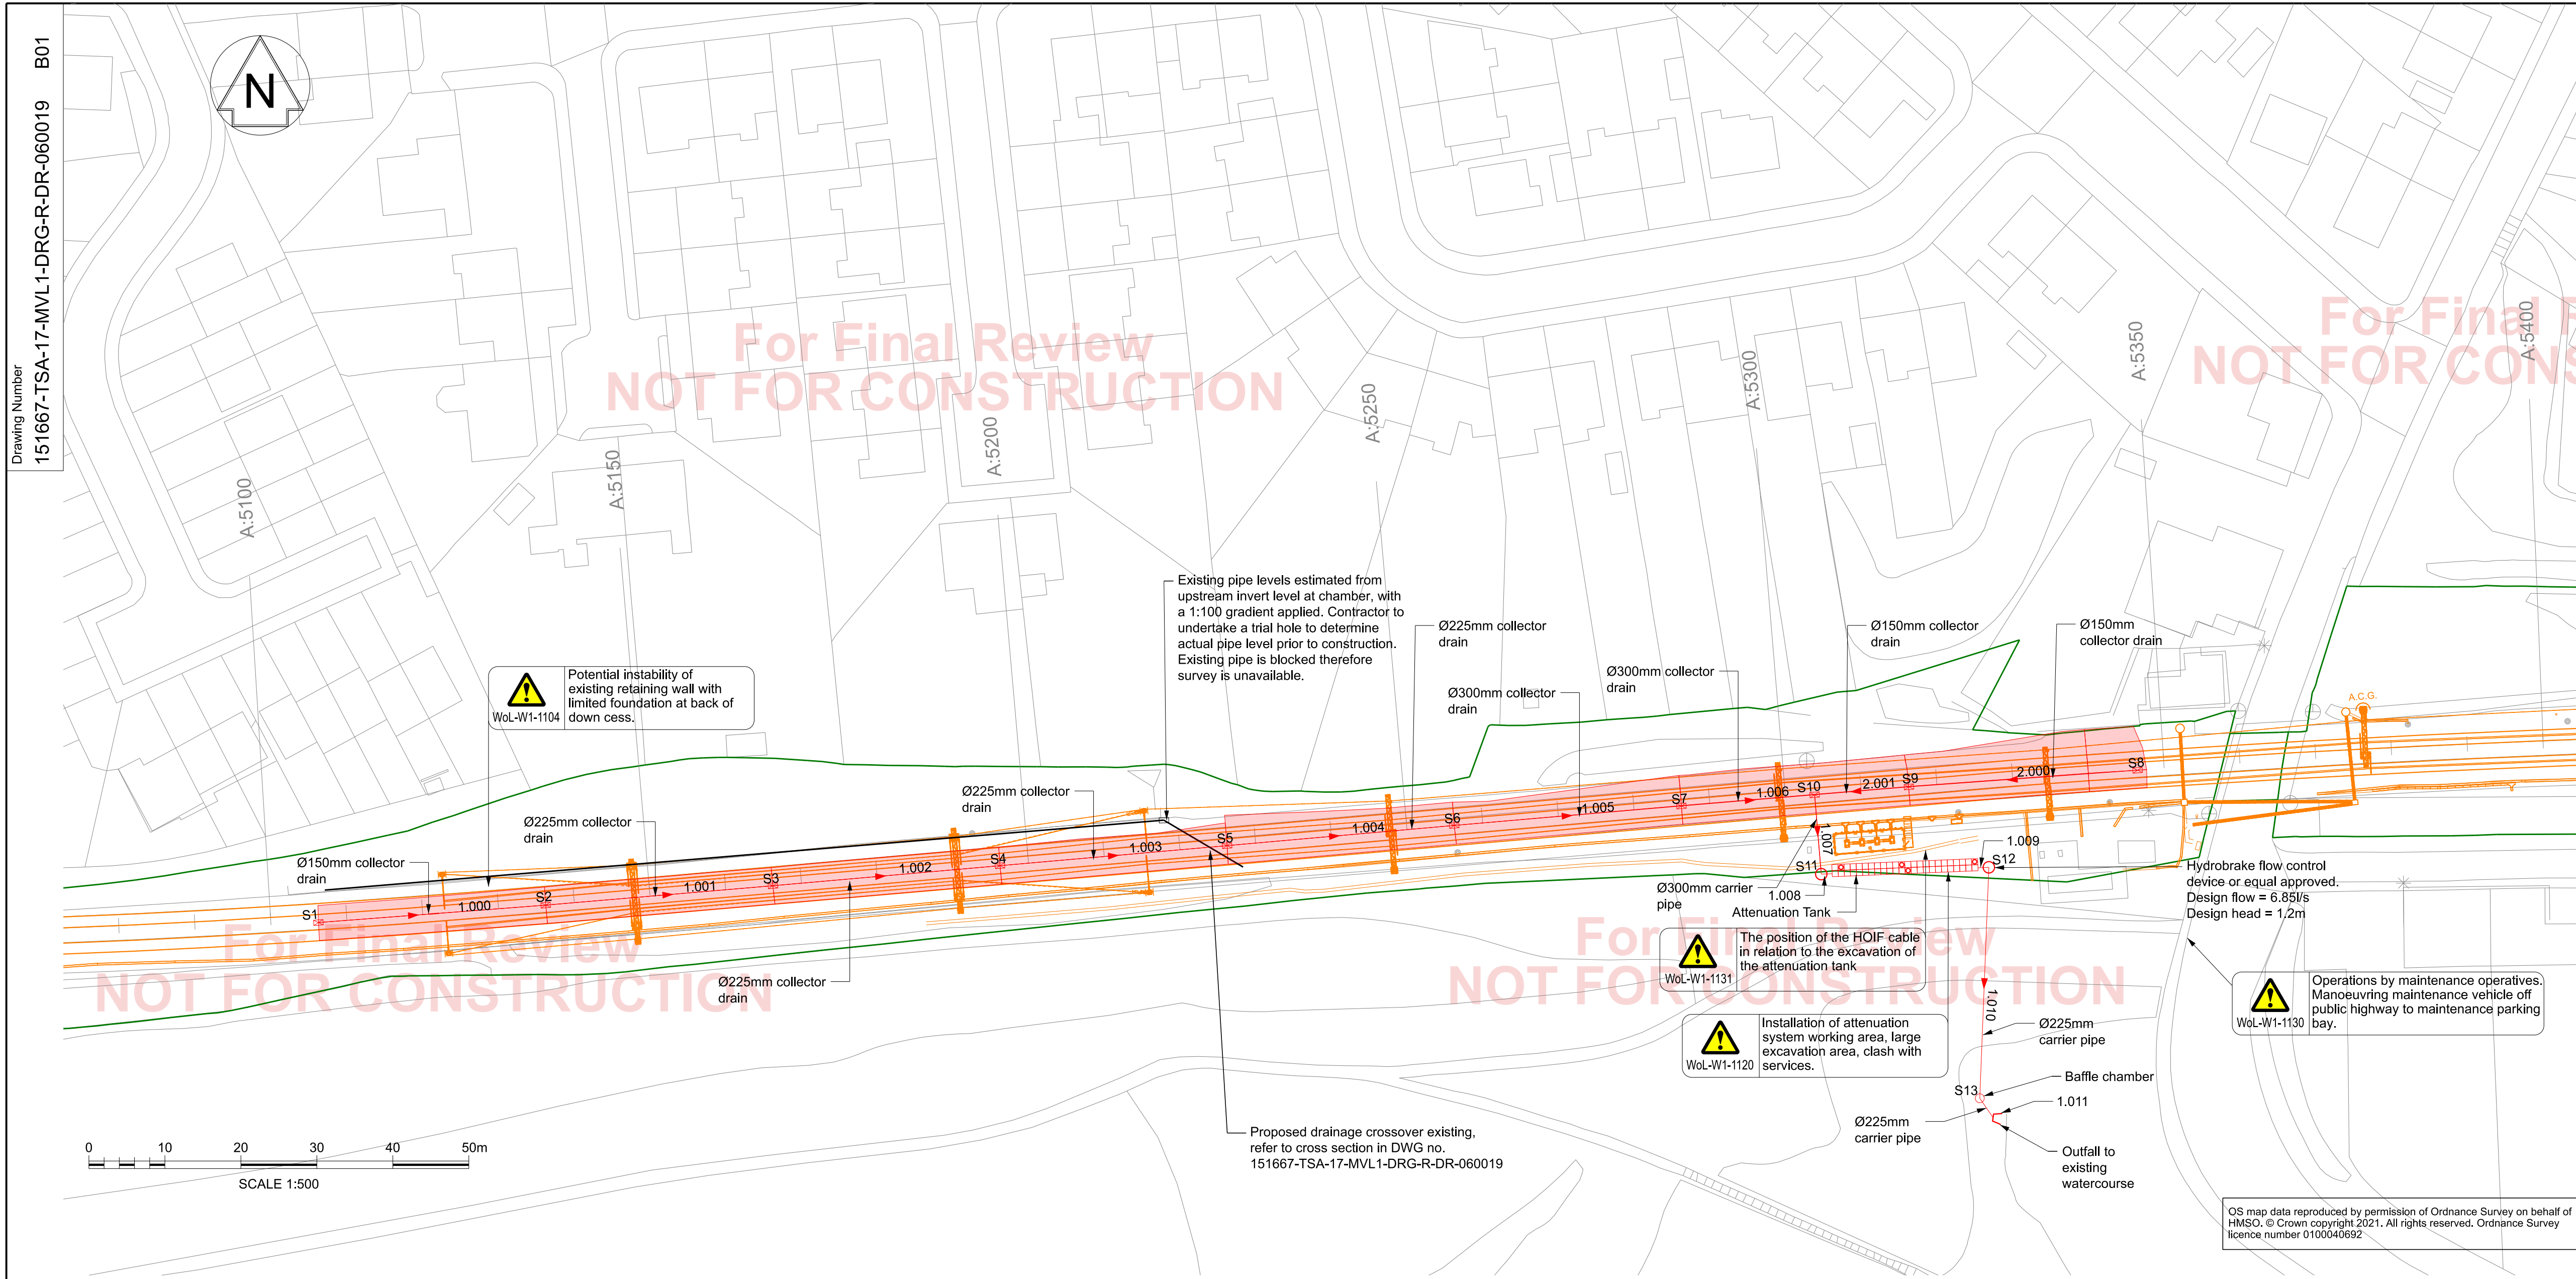

Legend/Notes

Notes:

1. Do not scale from this drawing.
2. All dimensions are in metres (m) unless specified otherwise.
3. Catch-pits to be located at maximum 30m crs unless stated otherwise.
4. Collector drains to be minimum 400mm below base of sleeper.
5. The CDM hazard record is to be read in conjunction with this drawing: 151667-TSA-W1A-MVL1-REG-W-SS-000001 Rev P437.
6. All drainage infrastructure to be included within track support zone must be approved for use.

Key:

- Proposed Drain
- Proposed Stirling Unit Catch-Pit in 6ft
- Proposed Pre-Cast Concrete Catch-Pit
- Directional Flow Arrow
- Catchment Area Included in Drainage Design
- Existing Catch-Pit
- Proposed Stormbloc Optimum Attenuation Tank
- Stormbloc Optimum Inspection Chambers
- Significant Hazards (CDM)

Legend

- Proposed
- To be removed
- To be modified
- Existing
- Ordnance survey data
- Aerial survey data (LIDAR)
- Indicative Network Rail land boundary
- Intervention proposed to create position(s) of safety
- Proposed future works
- Temporary works
- Works by others
- Passive provision

P02	17/11/21	Key Updated	CB	AW	AW
P03	20/01/22	Drawing amended	CB	AW	AW
P04	10/03/22	Drawing amended	AW	AW	AW
B01	10/03/22	Drawing amended	AW	AW	AW

Rev	Date	Description of Revisions	Drawn	Chkd	Appr	Suitability

Fit for Internal Review & Comment

S3

OS map data reproduced by permission of Ordnance Survey on behalf of HMSO. © Crown copyright 2021. All rights reserved. Ordnance Survey licence number 0100040692

Network:		Clayton Bridge													
Chamber Information						Pipe Information									
Pipe Reference	US Chamber	Snakegrid References		Type	DS Chamber	Pipe Type	Length	Dia.	Slope 1 in X	USCL	USIL	US Cover Depth	DSCL	DSIL	DS Cover Depth
		Eastings	Northings												
1.000	S1	208460.149	406723.292	Stirling catchpit	S2	Collector	30.038	150	100.0	72.355	71.605	0.600	72.349	71.305	0.894
1.001	S2	208490.099	406725.589	Stirling catchpit	S3	Collector	30.006	225	100.0	72.349	71.230	0.894	72.323	70.930	1.168
1.002	S3	208519.996	406728.143	Stirling catchpit	S4	Collector	30.005	225	100.0	72.323	70.930	1.168	72.189	70.630	1.334
1.003	S4	208549.886	406730.781	Stirling catchpit	S5	Collector	30.005	225	125.0	72.189	70.630	1.334	72.108	70.389	1.494
1.004	S5	208579.775	406733.418	Stirling catchpit	S6	Collector	30.008	225	200.1	72.108	70.389	1.494	72.010	70.239	1.546
1.005	S6	208609.665	406736.074	Stirling catchpit	S7	Collector	30.005	300	265.5	72.010	70.164	1.543	71.791	70.051	1.440
1.006	S7	208639.561	406738.631	Stirling catchpit	S10	Collector	17.574	300	245.0	71.791	70.051	1.440	71.670	69.980	1.390
2.000	S8	208699.599	406743.341	Stirling catchpit	S9	Collector	30.218	150	100.0	71.650	70.900	0.600	71.719	70.598	0.971
2.001	S9	208669.458	406741.192	Stirling catchpit	S10	Collector	12.432	150	93.7	71.719	70.598	0.971	71.670	70.465	1.055
1.007	S10	208657.068	406740.168	Stirling catchpit	S11	Carrier (UTX)	10.540	300	245.0	71.670	69.980	1.390	72.200	69.937	1.969
1.008	S11	208657.959	406729.665	Concrete catchpit	Storage tank	Carrier	1.413	300	250.0	72.200	69.937	1.969	72.200	69.932	1.968
1.009	-	208659.406	406729.725	Geocellular crates	-	-	19.200	1320	390.0	72.200	69.051	1.829	71.200	69.001	0.879
1.010	Storage tank	208678.612	406730.500	-	S12	Carrier	1.413	300	250.0	71.300	69.001	1.999	71.200	68.995	1.905
1.011	S12	208680.011	406730.542	Hydrobrake chamber	S13	Carrier	30.409	225	3.7	71.200	68.973	2.002	61.820	60.651	0.944
1.012	S13	208680.024	406730.562	Concrete baffle chamber	Headwall	Carrier	3.086	225	162.4	61.820	60.651	0.944	61.750	60.632	0.893
-	-	208681.775	406697.713	Headwall	-	-	-	-	-	-	-	-	-	-	-

NetworkRail

Authorised

Signed

Date

Contractor(s)

TRU West Alliance

Location

MILES PLATTING JN - STALYBRIDGE JN (ASHTON BRANCH)(A17)

Type

CAD Drawing

Sub-type

General Arrangement

Role

Rail Engineering

Sub-Role

Drainage

Zone

Miles Platting to Stalybridge

Phasing

Proposed

Project Stage

GRIP 5

Project

Transpennine Route Upgrade

Contract No.

151667

Contract Title

West of Leeds

Drawing Title

Clayton Bridge

Proposed Drainage

General Arrangement

Designed

C.Black

Signed

Electronically Signed

Date

10/03/22

Drawn

A.Walker

Signed

Electronically Signed

Date

10/03/22

Checked

A.Walker

Signed

Electronically Signed

Date

10/03/22

Approved

A.Walker

Signed

Electronically Signed

Date

10/03/22

Scale(s)

1:500

ELR & Mileage

1.0663 to 7.1013

Alternative Reference

Sheet

1 of 1

Drawing Number

151667-TSA-17-MVL1-DRG-R-DR-060019

Revision

B01