

Control Measure: Prior to erection the scaffold contractor and/or principal contractor should check the existing structure to ensure the scaffold can be based out and erected as detailed and inform Creator Ltd of any discrepancies.

Control measure: The scaffold contractor must ensure that the maximum bay size installed are as indicated and should not be exceeded. It is the responsibility of the scaffold contractor to remedy any defects.


Control measure: it is to be closely site managed to ensure that, in any one bay through the entire height, a cumulative load of 3 kN/m^2 and 2 kN/m^2 on any one level is not to be exceeded.

employ a structural engineer to ensure the applied loads from the scaffold do not overload the existing structure. Creator Ltd to be contacted where structure is deemed unsafe to support scaffold structure.

Control Measure: Maximum lift heights to be installed as detailed by the scaffold contractor and have a maximum tolerance of $\pm 100\text{mm}$

suitable measures are to be implemented. design does not cover vehicular impact

employ a structural engineer to ensure the applied loads from the scaffold do not overload the existing strata. Creator Ltd to be contacted where strata is deemed unsafe to support scaffold structure.

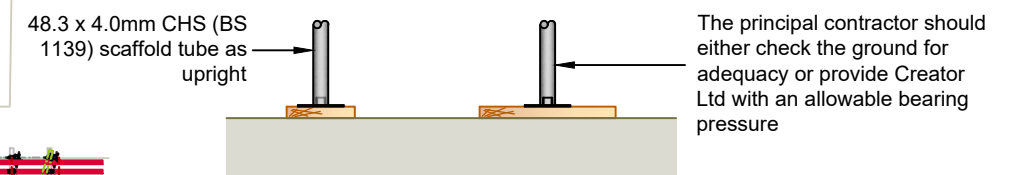

225 x 38 x 450mm (BS EN 2482)
Scaffold Board Solepad
Scale - 1:25

**READYLOCKS MAY BE USED IN
PLACE OF TUBE AND FITTING**

This design is to be read in conjunction with the following design drawings and/or documents:

CRE-IBN-189-001-001A_REPORT
APPENDIX A - CRE-IBN-189-001-001A_1,2,3,4.dwg

Prepared For:	
---------------	--



<u>Project Title/Description:</u>

Principal Contractor:	
-----------------------	--

SEE QUOTE

CREATOR
SCAFFOLD DESIGNS
& TEMPORARY WORKS CONSULTANTS LTD

Company Address:
Fullerton House, Fullerton Road,
Rotherham, S60 1DH
Contract Details:
Email:
enquiries@creator-scaffolddesigns.co.uk
Tel: 0114 3610060
www.creator-scaffolddesigns.co.uk