Drawings are the sole property of Interaction, and may not be used, transferred, or disclosed to a third party without the express permission of Interaction. Do not scale from this drawing. Contractor to verify all dimensions, levels, and components on-site. Any discrepancies shall be addressed in writing to Interaction prior to the commencement of the work, otherwise the Contractor shall bear full responsibility for any associated cost. This drawing is to be read in conjunction with all other documentation. Building parameters taken from as built drawings provided. Check survey undertaken only, subject to statutory approval. All dimensions shown are in millimetres unless otherwise shown.

0 1 2 3 4 5 6 7 8

Metres

N

W E

S

00 - General Demolition Notes

1. Drawing to be read with the MEP consultant information.
2. Drawing to be read with specifications
3. Main contractor's responsibility to notify Interior Designer of any discovery items not mentioned anywhere in neither drawing or specification.
4. Existing construction is assumed from information supplied by landlord.
5. All retained finishes are to be protected during strip-out.

03 - Ceiling Demolition Notes

1. Drawing to be printed in colour
2. Existing construction information has been taken from as-built model. No site survey has been undertaken.
3. All demolitions are indicative and subject to survey on site
4. Items defined for demolition to be removed in their entirety unless otherwise specified in accordance with BS 6187
5. All areas not within scope of works to be protected
6. See MEP consultants information for scope of services demolition
7. All existing fire barriers to be retained unless otherwise specified
8. All suspended ceiling tiles to be carefully removed and protected for re-use
9. All ceiling mounted/integrated services to be carefully removed, protected and stored in a safe location for re-use where specified by MEP consultants
10. Make good to any columns or perimeter/core partitions where ceiling removal has caused damage


03 - Ceiling Demolitions - Types Key

Symbols Key

- Out of scope, No works to the areas in this phase
- All flush plaster and suspended ceiling tiles to be retained unless otherwise stated.
- Existing Central Bulkhead
- Removed and relocated Suspended linear pendant lights
- Existing Suspended linear pendant light
- Removed and relocated recessed spot light
- Existing Ceiling spot light (Positioning as per on site)

Key Notes

1. Read in conjunction with 50 Series drawings for proposed reflected ceiling plan.
2. Read in conjunction with MEP consultants drawings.
3. All existing coffers are retained and exposed
4. Central bulkhead to house MEP services with grills on the side to allow air to access the workspace
5. In the main office space, Linear lights are positioned either side of the coffer
6. Recessed spot lights set within the bulkhead or suspended ceiling

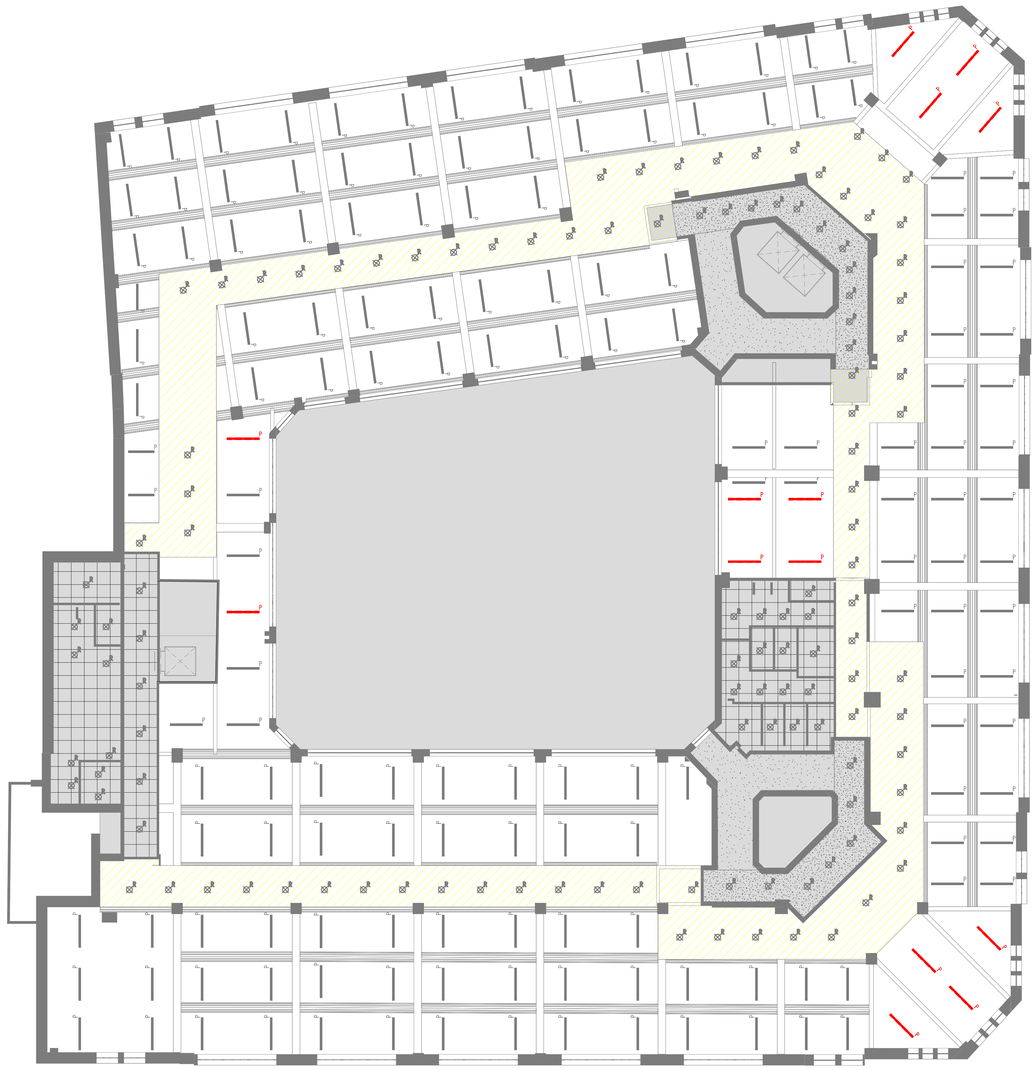

Existing RCP Layout - 02

1 : 100

NOTE
Removal of sections of bulkhead may be required for mechanical and electrical modifications
Detailed Mechanical and Electrical design to follow

P02	LBC Amends	30/01/2026
P01	LBC Issue	11/12/2025
P00	Issued for comment	05/12/2025
REV	DESCRIPTION	DATE

Project
Block-Sunlight House

Address
Little Quay St, Manchester
M3 3HP

interaction
The Quarter, 3-4 Edgar Mews, Bath, BA1 2FX
01225 465 600 | info@interaction.uk.com
interaction.uk.com

Drawing Title
Existing RCP Layout - 02
Level 02

File Name
BLK-INT-SH-02-DR-I-03-102

Project Number	Level	Drawing Number
B2473	02	03-102

Drawing Status	Revision
For Information	P02

Drawing Scale @ A0	Drawn by	Checked by	Date
1 : 100	XC	GD	30/01/2026