



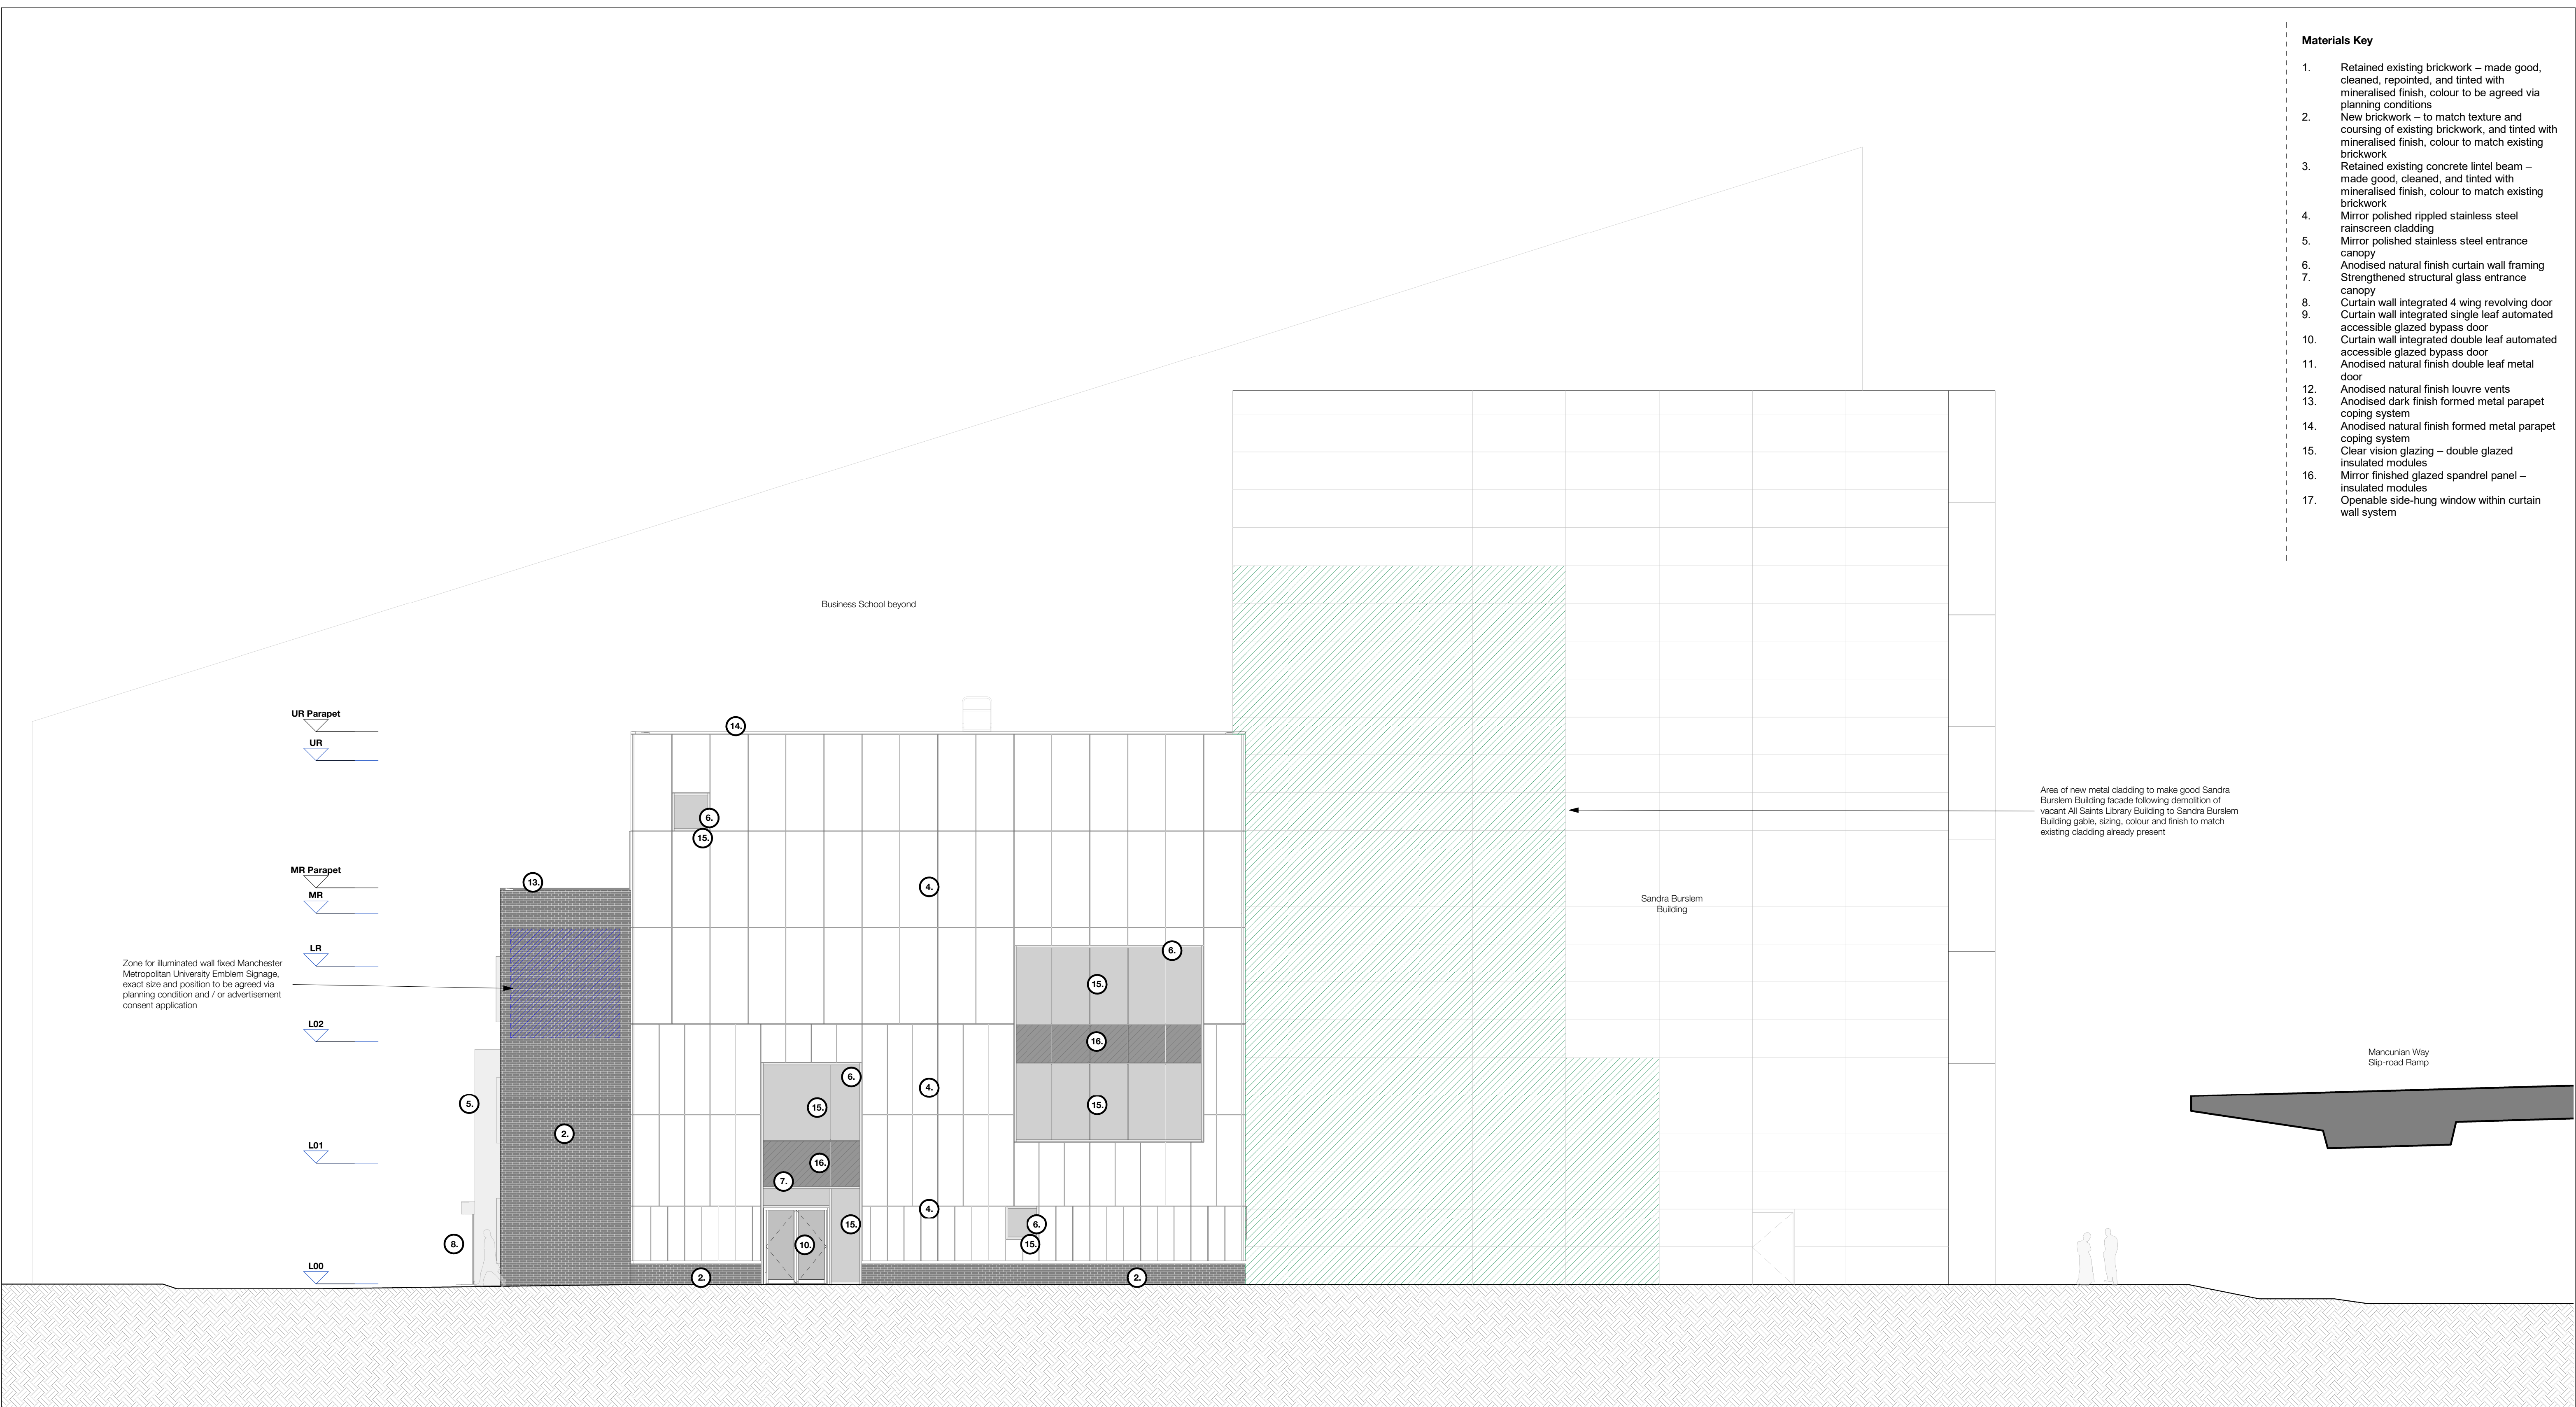

Materials Key

1. Retained existing brickwork – made good, cleaned, repointed, and tinted with mineralised finish, colour to be agreed via planning conditions
2. New brickwork – to match texture and coursing of existing brickwork, and tinted with mineralised finish, colour to match existing brickwork
3. Retained existing concrete lintel beam – made good, cleaned, and tinted with mineralised finish, colour to match existing brickwork
4. Mirror polished rippled stainless steel rainscreen cladding
5. Mirror polished stainless steel entrance canopy
6. Anodised natural finish curtain wall framing
7. Strengthened structural glass entrance canopy
8. Curtain wall integrated 4 wing revolving door
9. Curtain wall integrated single leaf automated accessible glazed bypass door
10. Curtain wall integrated double leaf automated accessible glazed bypass door
11. Anodised natural finish double leaf metal door
12. Anodised natural finish louvre vents
13. Anodised dark finish formed metal parapet coping system
14. Anodised natural finish formed metal parapet coping system
15. Clear vision glazing – double glazed insulated modules
16. Mirror finished glazed spandrel panel – insulated modules
17. Openable side-hung window within curtain wall system

Mancunian Way
Slip-road Ramp



Status codes: S1 - Suitable for Coordination S2 - Suitable for Information S3 - Suitable for Review & Comment S4 - Suitable for Review & Authorization S5 - Suitable for Review & Acceptance An - Approved & Accepted Stage completion	Rev	Description	Date	Copyright Hawkins\Brown Architects No implied licence exists. This drawing should not be used to calculate areas for the purposes of valuation. Do not scale this drawing. All dimensions to be checked on the site by the contractor and such dimensions to be their responsibility. All work must comply with relevant British Standards and Building Regulations requirements. Drawing errors and omissions to be reported to the architect. To be read in conjunction with Architect's specification and other consultant information.	Key Area for Signage New Metal Cladding (To match existing)	Scale @ A1 1 : 100	Date 19.03.2026	Job Number 250082	Project All Saints West Refurbishment	26-28 Hilton Street Manchester M1 2EH mail@hawkinsbrown.com hawkinsbrown.com	Hawkins\Brown
	P01	Issued for Review & Comment	13.01.2026								
	P02	Issued for Review & Comment	15.01.2026								
	P03	Issued for Review & Comment	19.01.2026								
	P04	Issued for Review & Comment	20.01.2026								
	P05	Issued for Review & Comment	19.03.2026								