


DO NOT SCALE FROM THIS DRAWING

DRAWING BACKGROUND(S):
NOTES

1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTURAL & STRUCTURAL DRAWINGS.
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT BUILDING SERVICES DRAWINGS & THE RELEVANT SECTIONS OF THE SPECIFICATIONS & SCHEDULES.
3. ALL DIMENSIONS ARE IN mm UNLESS OTHERWISE STATED.
4. ANY DISCREPANCIES, ERRORS OR OMISSIONS ARE TO BE CLARIFIED WITH THE RELEVANT ENGINEER AT THE EARLIEST OPPORTUNITY.
5. ALL WORKS ARE TO BE IN ACCORDANCE WITH THE CURRENT RELEVANT STATUTORY REGULATIONS, BUILDING REGULATIONS, BRITISH STANDARDS, ACCEPTED CODES OF PRACTICE AND TRADE ASSOCIATION REQUIREMENTS.
6. IT IS THE CONTRACTORS RESPONSIBILITY TO LIAISE WITH THE MAIN CONTRACTOR AND ALL OTHER TRADES TO ENSURE THE CORRECT CO-ORDINATION OF WORKS TO SUIT PROGRAMME RESTRAINTS, AND TO AVOID CLASHES.

VENTILATION NOTES

1. DUCTWORK INSTALLATION TO BE IN ACCORDANCE WITH DW144.
2. FIRE DAMPERS AND ACCESS PANELS TO BE PROVIDED WHEN DUCTS PASS THROUGH FIRE BARRIERS, FIRE DAMPERS TO BE OUT OF AIR STREAM TYPE.
3. ALL FAN COIL UNITS DUCTWORK, GRILLES AND PLENUM BOXES SHALL BE SUPPORTED USING DROP ROD FIXING AND UNISTRUT. GRIPPLE WIRE SHALL NOT BE ACCEPTED AS A MEANS OF SUPPORT
4. ACCESS HATCHES SHALL BE PROVIDED IN THE DUCTWORK IN ACCORDANCE WITH DW144, TABLE 25, LEVEL 3.
5. MAXIMUM PERMITTED LENGTH OF FLEXIBLE DUCTWORK SHALL BE 500mm.
6. CONTRACTOR/MANUFACTURER TO ENSURE ALL GRILLES ARE BLANKED TO SUIT CORRECT AIRFLOW.
7. CONTRACTOR/MANUFACTURER TO ENSURE ALL SPOUT SIZES ARE CORRECT FOR THE DIFFUSER VOLUME
8. CONTRACTOR/MANUFACTURER TO ENSURE DIFFUSER PLATE IS SUPPLIED AND FITTED IN SUCH A WAY THAT AIRSTREAM IS EQUALLY DIVIDED.
9. CONTRACTOR/MANUFACTURER TO ENSURE CEILING TYPE IS CONFIRMED PRIOR TO ANY MANUFACTURE.
10. CONTRACTOR/MANUFACTURER TO ENSURE GRILLE CORES ARE REMOVABLE SO PLENUM CAN BE CLEANED.
11. CONTRACTOR/MANUFACTURER TO ENSURE PLENUM BOXES ARE LINED AS STANDARD ELIMINATING NOISE PROBLEMS.
12. ALUMINIUM CLADDING WITH A PITCHED TOP CONSTRUCTION IS REQUIRED EXTERNALLY TO PROMOTE SELF-SHEDDING OF RAIN WATER

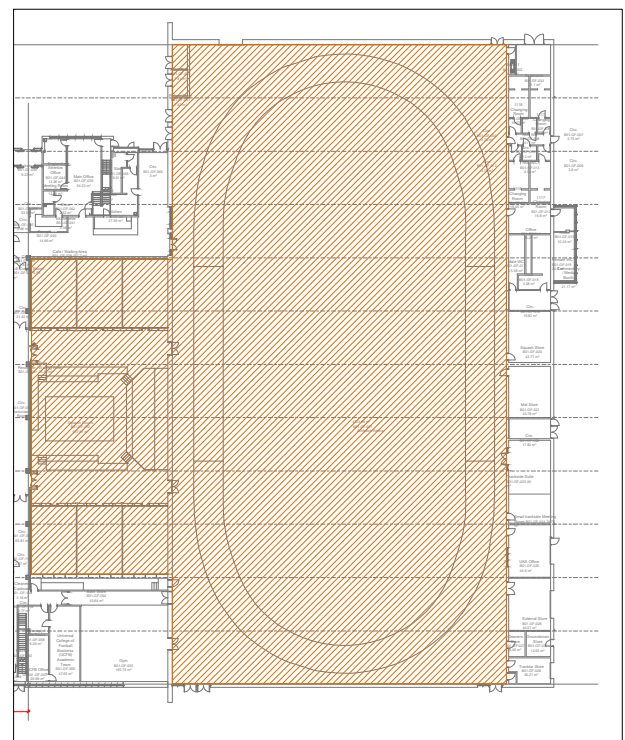

KEY PLAN

P3	12-03-26	STAGE 4	MB	DR
P2	09-03-26	STAGE 4	MB	DR
P1	27-02-26	PRELIMINARY ISSUE	PK	DR
Rev	Date	Description	Eng	CHK

OXENDALE MECHANICAL SERVICES ENGINEERING	Unit 5, Dorlan Court, Alan Ramsbottom Way, Great Harwood, BB6 7UR Tel: 01254 580 431 Fax: 01254 583 331 E-mail: info@cmoxendale.co.uk Website: www.cmoxendale.co.uk
--	---

Cronshaw ELECTRICAL LTD	Vale Mill Business Park, Emerald St, Blackburn BB1 9QJ Tel: 0845 250 0780 Fax: 0845 250 0781 E: enquiries@cronshawelectrical.com Web: www.cronshawelectrical.com
-----------------------------------	--



Project
**HOUSE OF SPORTS
ROWSLEY ST
MANCHESTER
M11 3FF**

Drawing Title
**PROPOSED VENTILATION
LAYOUT - ATHLETIC ARENA &
SQUASH COURTS**

Status
PRELIMINARY

Project No. JR010530	Drawn PK	Scale / Paper Size 1:100 @ A1
-------------------------	-------------	----------------------------------

Drawing No. JR010530-CMO-ZZ-ZZ-DR-M-0501	Rev P3
---	-----------

