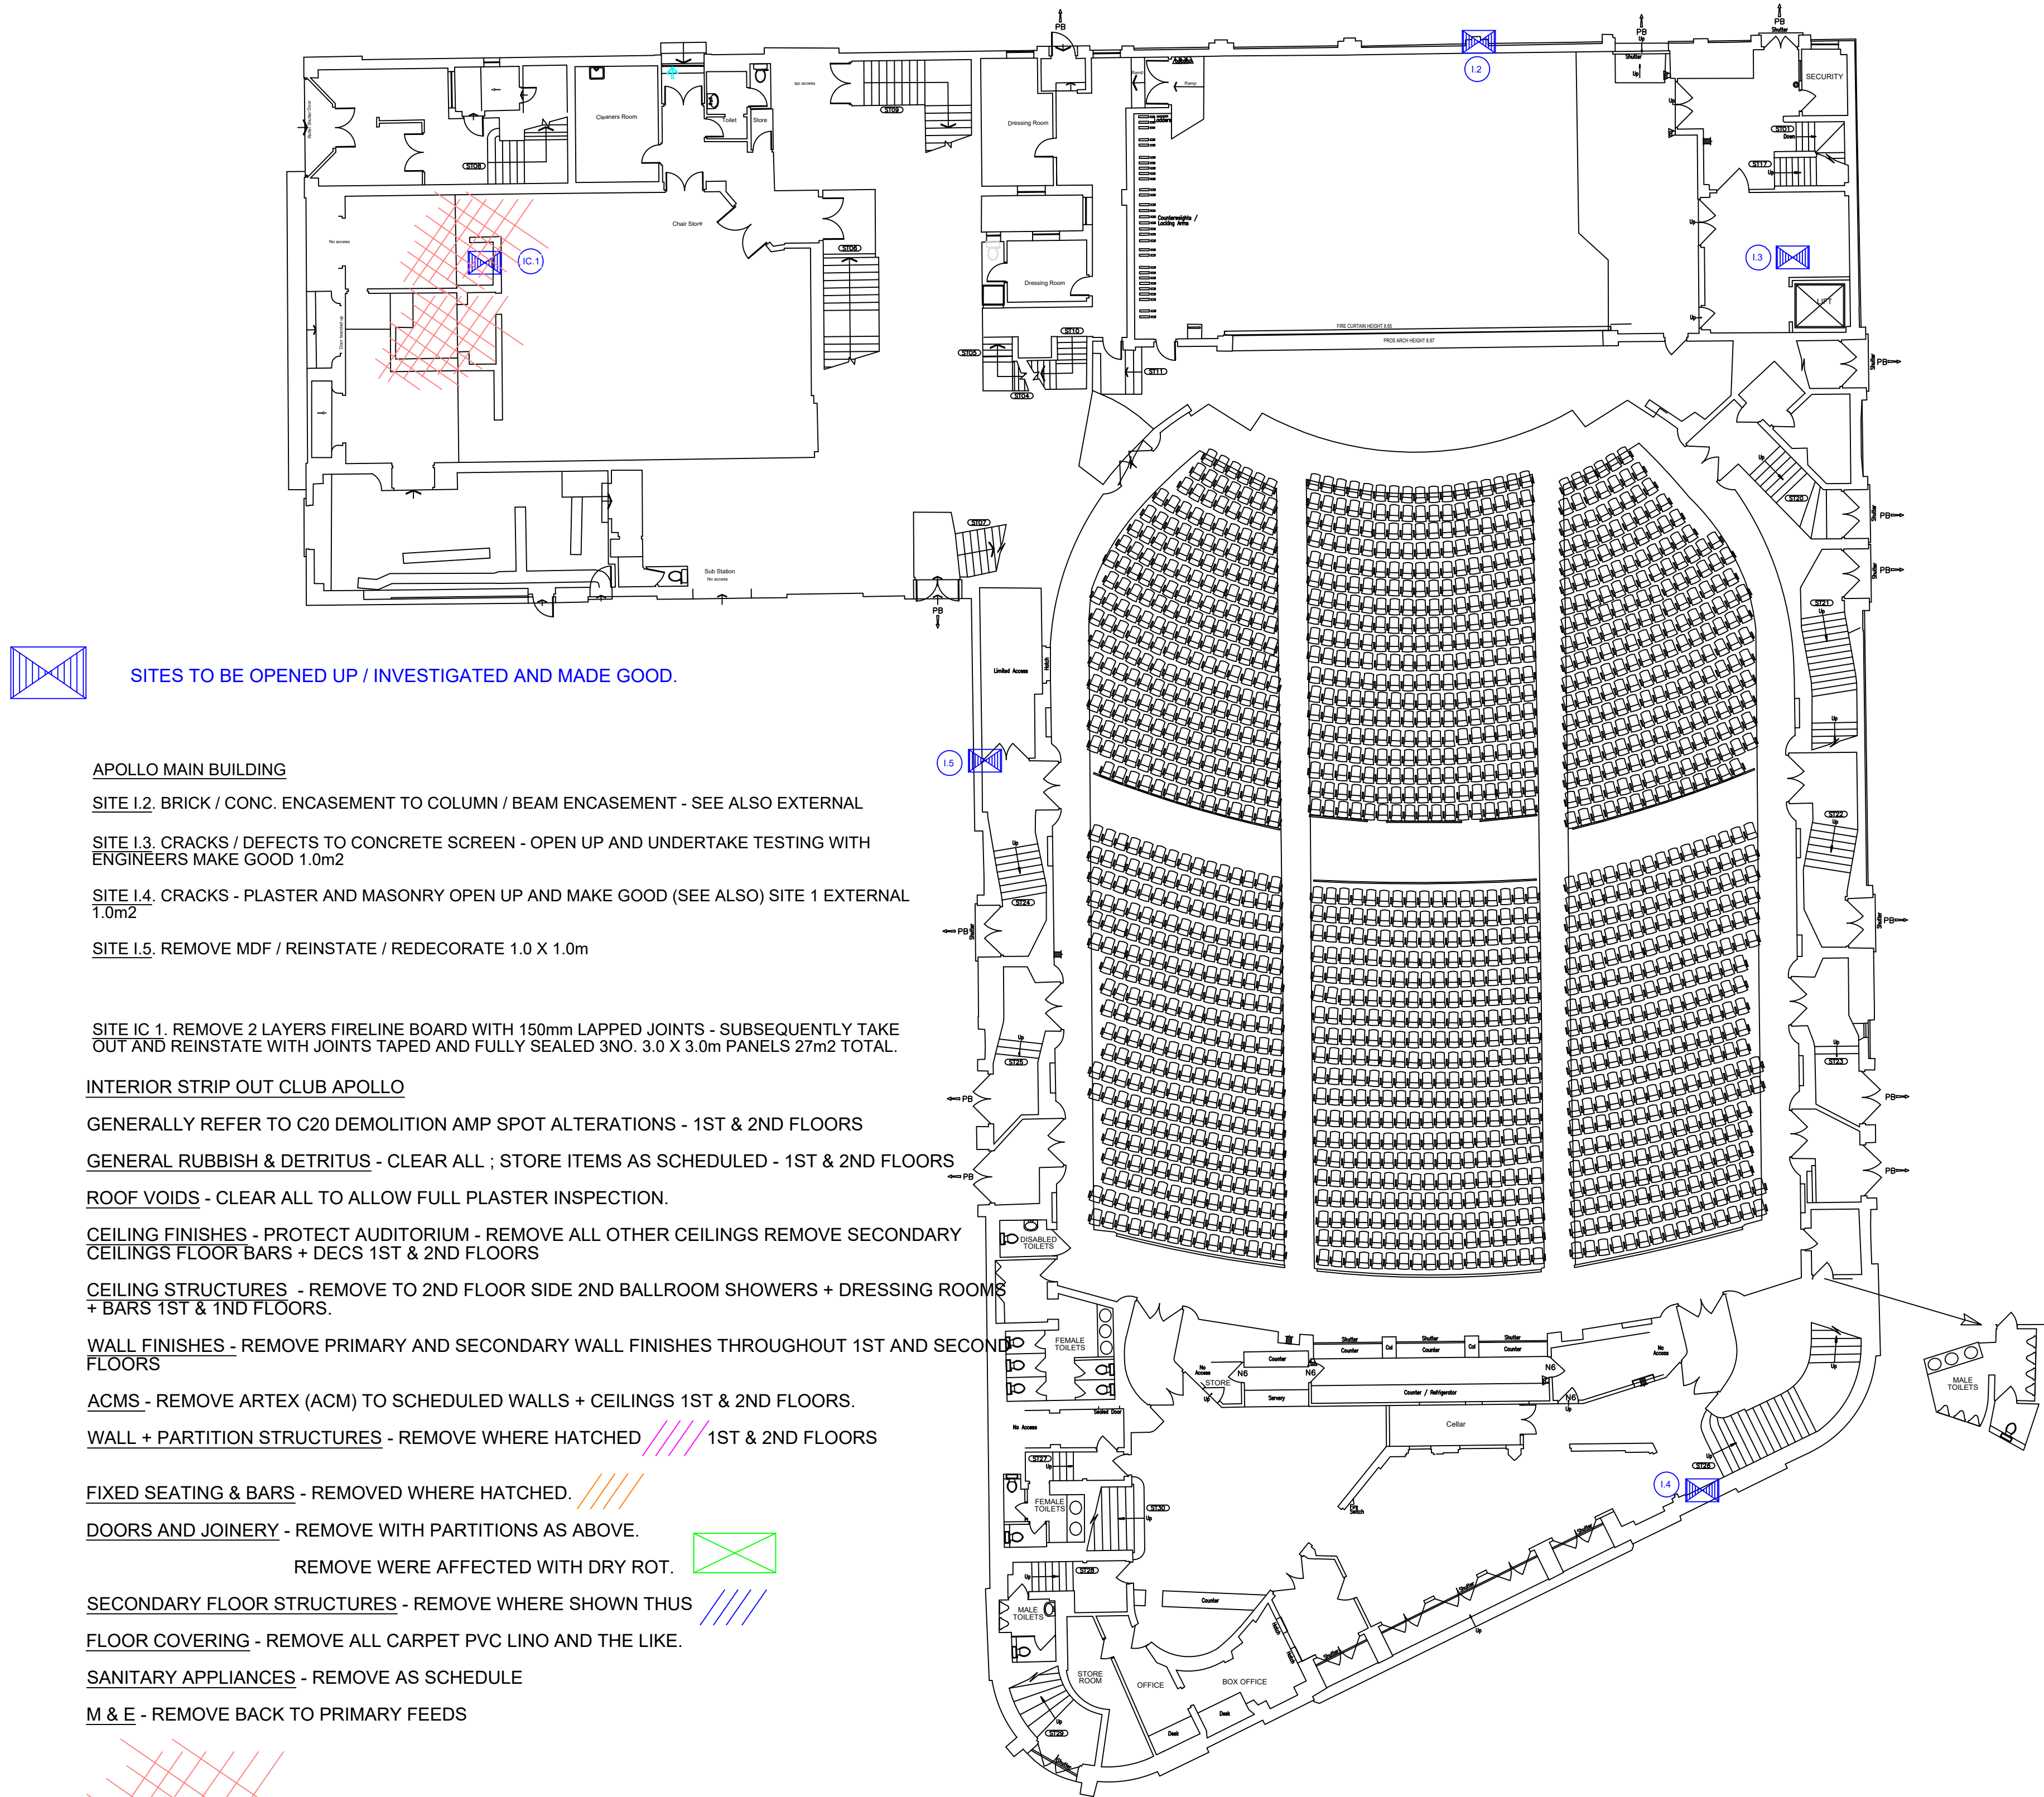


SITES TO BE OPENED UP / INVESTIGATED AND MADE GOOD.

APOLLO MAIN BUILDING

SITE I.2. BRICK / CONC. ENCASEMENT TO COLUMN / BEAM ENCASEMENT - SEE ALSO EXTERNAL

SITE I.3. CRACKS / DEFECTS TO CONCRETE SCREEN - OPEN UP AND UNDERTAKE TESTING WITH ENGINEERS MAKE GOOD 1.0m2

SITE I.4. CRACKS - PLASTER AND MASONRY OPEN UP AND MAKE GOOD (SEE ALSO) SITE 1 EXTERNAL 1.0m2

SITE I.5. REMOVE MDF / REINSTATE / REDECORATE 1.0 X 1.0m

SITE IC 1. REMOVE 2 LAYERS FIRELINE BOARD WITH 150mm LAPPED JOINTS - SUBSEQUENTLY TAKE OUT AND REINSTATE WITH JOINTS TAPED AND FULLY SEALED 3NO. 3.0 X 3.0m PANELS 27m2 TOTAL.

INTERIOR STRIP OUT CLUB APOLLO

GENERALLY REFER TO C20 DEMOLITION AMP SPOT ALTERATIONS - 1ST & 2ND FLOORS

GENERAL RUBBISH & DETRITUS - CLEAR ALL ; STORE ITEMS AS SCHEDULED - 1ST & 2ND FLOORS

ROOF VOIDS - CLEAR ALL TO ALLOW FULL PLASTER INSPECTION.

CEILING FINISHES - PROTECT AUDITORIUM - REMOVE ALL OTHER CEILINGS REMOVE SECONDARY CEILINGS FLOOR BARS + DECS 1ST & 2ND FLOORS

CEILING STRUCTURES - REMOVE TO 2ND FLOOR SIDE 2ND BALLROOM SHOWERS + DRESSING ROOMS + BARS 1ST & 1ND FLOORS.

WALL FINISHES - REMOVE PRIMARY AND SECONDARY WALL FINISHES THROUGHOUT 1ST AND SECOND FLOORS

ACMS. - REMOVE ARTEX (ACM) TO SCHEDULED WALLS + CEILINGS 1ST & 2ND FLOORS.

WALL + PARTITION STRUCTURES - REMOVE WHERE HATCHED 1ST & 2ND FLOORS

FIXED SEATING & BARS - REMOVED WHERE HATCHED.

DOORS AND JOINERY - REMOVE WITH PARTITIONS AS ABOVE.


REMOVE WERE AFFECTED WITH DRY ROT.

SECONDARY FLOOR STRUCTURES - REMOVE WHERE SHOWN THUS

FLOOR COVERING - REMOVE ALL CARPET PVC LINO AND THE LIKE.

SANITARY APPLIANCES - REMOVE AS SCHEDULE

M & E - REMOVE BACK TO PRIMARY FEEDS

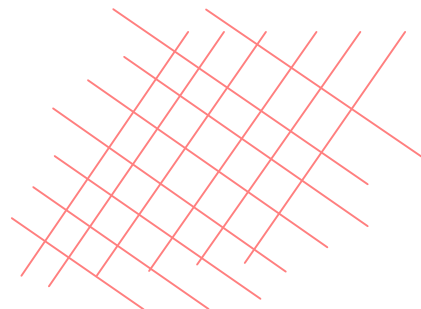

DRY ROT.

GROUND FLOOR LEVEL

Copyright. This drawing and design and all the information contained therein is the sole copyright of Blik, and reproduction in any form is forbidden unless permission is obtained in writing.

CONTRACTORS PLEASE NOTE:

1) Warning: no dimensions to be scaled from this drawing. All Contractors must visit site and be responsible for taking and checking all dimensions relative to this work. The Designer must be advised of any discrepancies in writing.

2) This drawing must be read in conjunction with the Specification/Bill of Quantities and related drawings. Any structural work must be carried out to the exact specification and requirements of the Client's appointed Structural Engineer and any amendments must have his express prior written authority.

3) All structural work must be inspected at all relevant stages by the Structural Engineer and the Local Authority's Building Surveyor and comply with their requirements. Any costs and claims for damages, loss of trade, etc. incurred by failing so to do are the sole liability of the Contractor.

4) Any discrepancies between drawings and specification should be reported to the Designer prior to any work commencing.

JBH DEVELOPMENTS LTD

Ian Heald BSc MRICS
JBH Developments Ltd
Silverwell Chambers
15 Silverwell St
Bolton
BL1 1PP

M: 07714 431 608
E: ian.heald@jbh-developments.co.uk

blik
INTERIOR DESIGN & ARCHITECTURAL CONSULTANCY

Job title Apollo - Manchester	
Drawing title Test sites and repairs Ground Floor inc. demo + strip out	
Scale 1:NTS.	Drawing No. 1141 - 01- 012A
Date Jan. 2026	
Drawn by	