

DO NOT SCALE EXCEPT FOR PLANNING AND BUILDING REGULATION PURPOSES

GENERAL NOTES

LIGHTING :-
ALL LIGHTING TO BE POSITIONED TO AVOID DIRECT GLARE ON THE EYES OF THE USER AND UNWANTED REFLECTIONS FROM THE SCREEN OR OPERATING FEATURES. GLARE FROM LIGHTING TO BE AVOIDED.
SIGNAGE :-
ALL SIGNAGE TO CONFORM TO BS 8300:2001 SECTIONS 9.2.2 LOCATION & DESIGN OF SIGNS & INFORMATION AND 9.2.3 VISUAL SIGNS.
ALL NEW GLAZING CONFORMS TO BS 6206.
ALL ELECTRICAL WORK CONFORMS TO BS 7671.

IT IS ASSUMED THAT ALL PRELIMINARY WORKS CARRIED OUT / CONTRACTED BY THE SITE OWNER (SHOULD THEY BE REQUIRED BY THE PROJECT) ARE COMPLETED IN ACCORDANCE WITH CURRENT BUILDING REGULATIONS 2010 AND AMENDMENTS THEREAFTER

SITE NOTES

- FLOOR CONSTRUCTION: RAISED TIMBER FLOOR ON CONCRETE FLOOR
- TTW INSTALL
- REMOVE EXISTING LARGE L/H/S GLAZING PANEL
- REMOVE SECTION OF RAISED FLOOR TO SUIT ATM PLINTH
- CUT DOWN SHUTTER - NEW GUIDE, ANGLE, INFILL AND BOX SECTION REQUIRED
- INSTALL: 2 X GREY LAMINATE PANELS, PLINTH, ATM, ELECTRICS AND ILLUMINATED SIGNAGE
- CONNECT ATM TO EXISTING ELECTRICS PROVIDED BY OTHERS / DIS B. SUGGESTS DEDICATED SPAREWAY AVAILABLE TO ATM / TBC BY ELECTRICAL SURVEY
- MAKE GOOD INTERNAL APERTURE WITH WHITE PLASTIC TRIM
- NOTE:
- NO ASBESTOS REG. NCRA TO ARRANGE ASBESTOS SURVEY REQUIRED PRIOR TO FURTHER SURVEYS AND INVASIVE WORKS COMMENCING
 - ALL PROPOSED ATM INSTALL WORKS MUST ALLOW FOR FULL ATM SERVICE CLEARANCE INC. FULL RACK OUT OF REAR DISPENSERS
 - NO ATM ENCLOSURE INSTALLED AS STATED BY CASHZONE
 - NON-STANDARD KEY NO. 5 DIMENSION
 - CASH ZONE REQUESTED ILLUMINATED SIGNAGE
 - FOR ATM ELECTRICS / SEE ELECTRICAL SURVEY
 - DUE TO SPACE / SITE TO REMOVE SECTION OF COUNTER TO SUIT SERVICE CLEARANCE OF ATM INSTALL / WORKS TBC
 - NCRA SURVEYOR STATED 245MM BETWEEN RAISED AND CONCRETE FLOOR / TBC BY DESTRUCTIVE FLOOR SURVEY / PLINTH HEIGHT TBC / PLINTH TO BE SUNK DOWN
 - INTERNAL BEADING HIDDEN BY SUSPENDED CEILING / SHOP FRONT SURVEY REQUIRED
 - CASHZONE SITE PICTURES SUGGESTS DEDICATED SPAREWAY ON DIS B. TO ATM
 - CUSTOMER REQUESTED ATM TO BE INSTALLED AS CLOSE TO RH/S AS POSSIBLE TO ALLOW FULL ACCESS TO TOBACCO UNIT

WORK TO BE CARRIED OUT BY SITE

PROVIDE FULL ACCESS FOR ASBESTOS ELECTRICAL, SHUTTER, DESTRUCTIVE FLOOR AND SHOP FRONT SURVEYS


REMOVE 1 X STUD WALL. REMOVE LOOSE STOCK STORED IN ATM INSTALL LOCATION

REMOVE / CUT DOWN SECTION OF COUNTER TO SUIT ATM INSTALL


REMOVE SECTION OF SUSPENDED CEILING AT ATM INSTALL LOCATION TO EXPOSE INTERNAL BEADING

TEMPORARILY REMOVE BOX SECTION OF COUNTER FOR ATM DELIVERY ONLY


TO BE TEMPORARILY REMOVED BY SITE

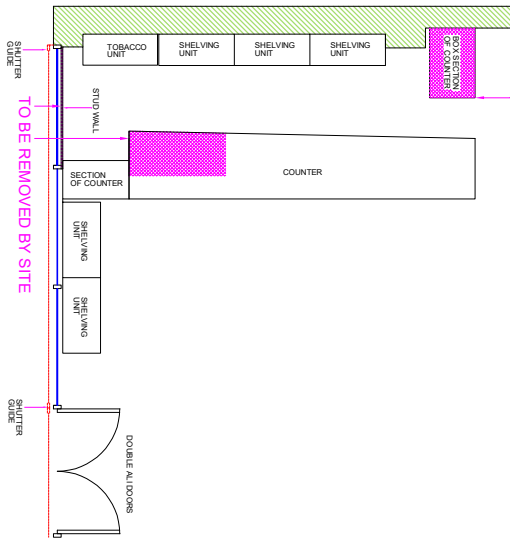

EXISTING (PART) PLAN

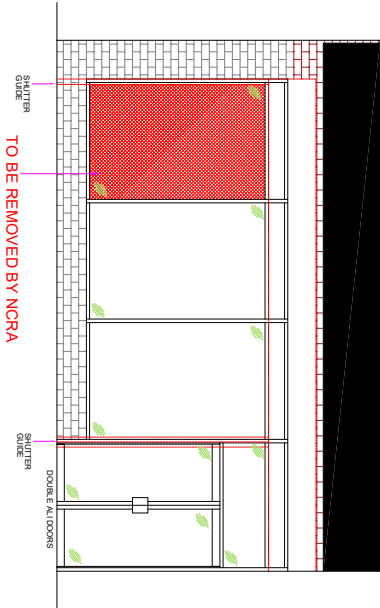


EXISTING ELEVATION

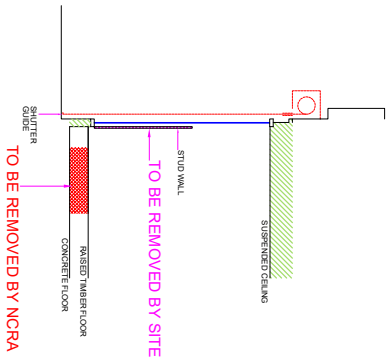


EXISTING SECTION VIEW A-A

0 1 2 3 4 5 6 7 8 9 10
Scale In Metres Scale 1:100

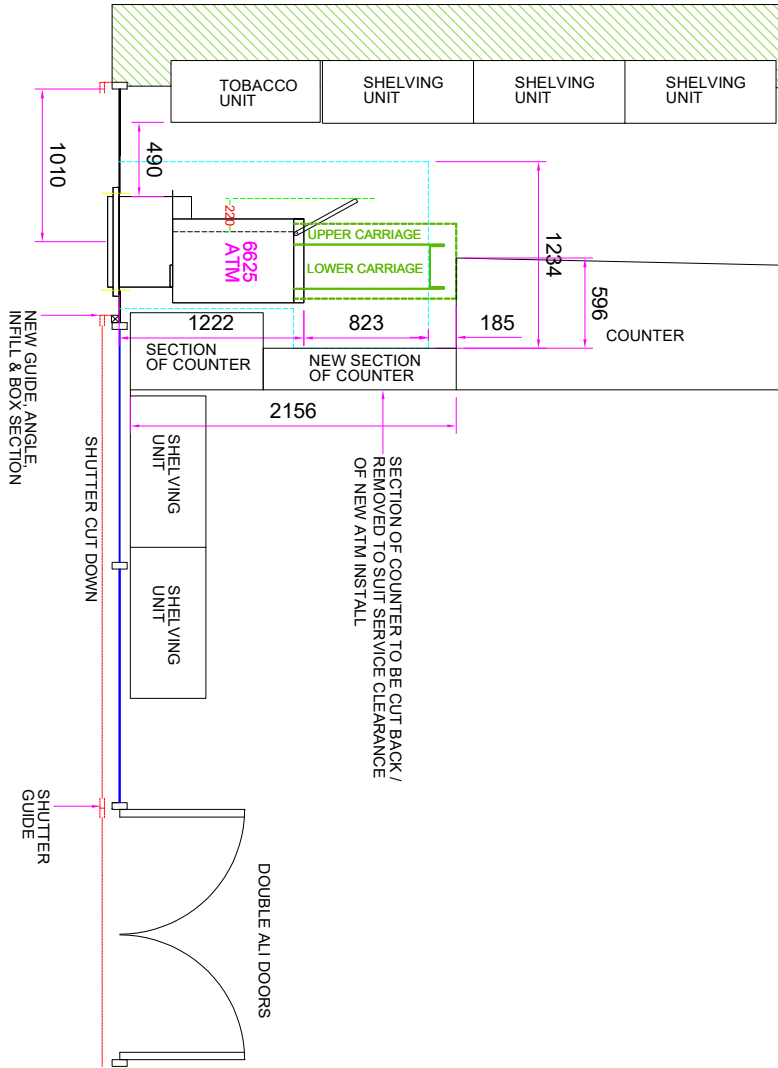


PROPOSED (PART) PLAN

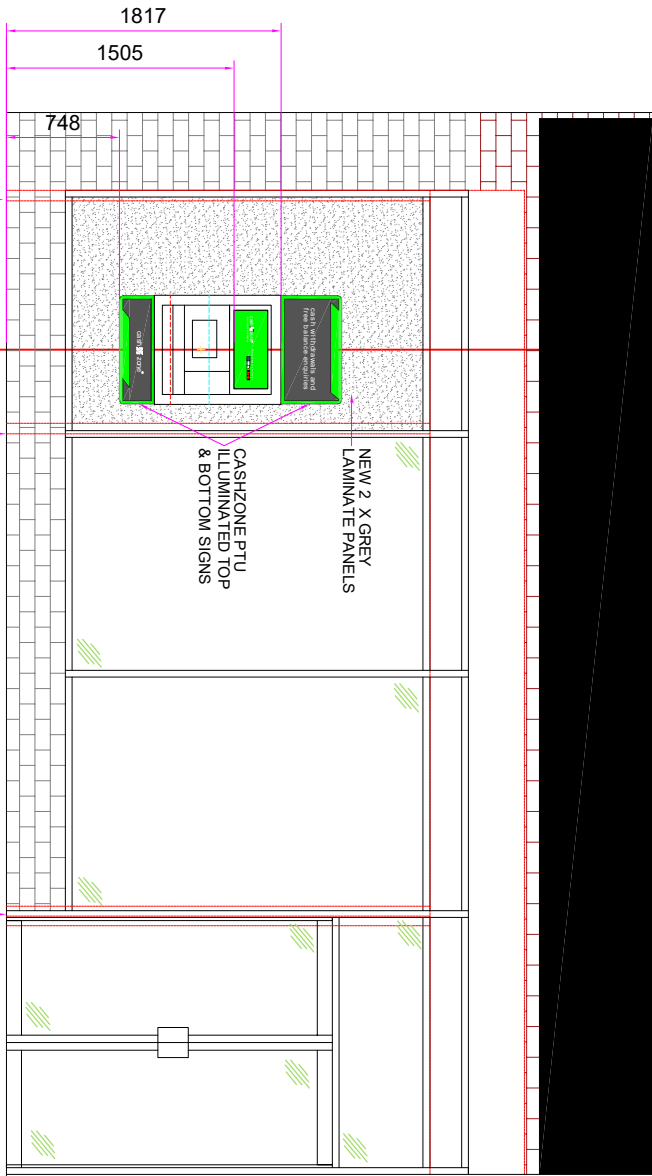

PROPOSED ELEVATION

0 1 2 3 4 5 6 7 8 9 10
Scale In Metres Scale 1:50

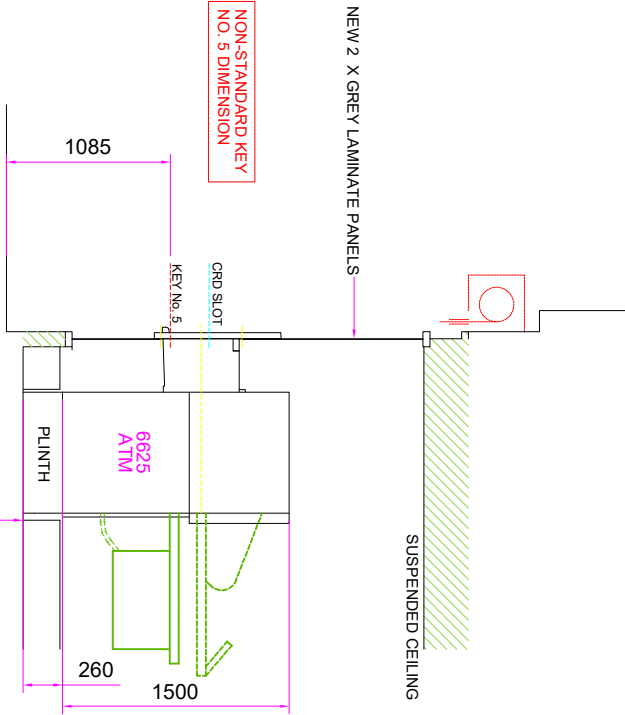

SECTION VIEW A-A

0 1 2 3 4 5 6 7 8 9 10

SITE ADDRESS SMR SUPERSTORE, 86-90 MAULDETH ROAD WEST, WITHINGTON, MANCHESTER, M20 1AB	TITLE PROPOSED AUTOMATED TELLER MACHINE (ATM) INSTALLATION FOR CASHZONE		
	DRAWN AG	DATE 25/07/2025	SCALE VARIOUS @A3
	REFRERS No. E029659	SHEET	REVISION 02
	REVISION		

DESCRIPTION	TITLE PROPOSED AUTOMATED TELLER MACHINE (ATM) INSTALLATION FOR CASHZONE		
	02	SIGNAGE CHANGED TO TOP & BOTTOM SIGNS CONFIRMED BY PLANNING TEAM	03
	01	ATM POSITIONED AS FAR TO RH/S OF PANEL AS CONFIRMED BY IMAC TEAM	02
	REVISION		

drawing approval		SIGNED:-
NAME:-	AG	
POSITION:-	AG	
DATE:-	DATE:-	



NCR ATLEOS