

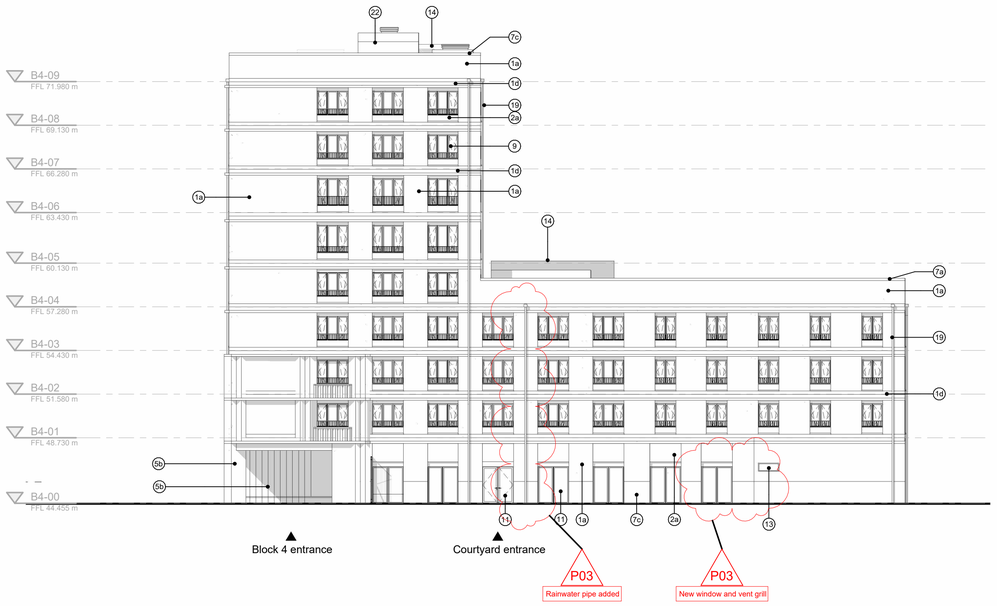



1 Proposed East Elevation
1 : 200

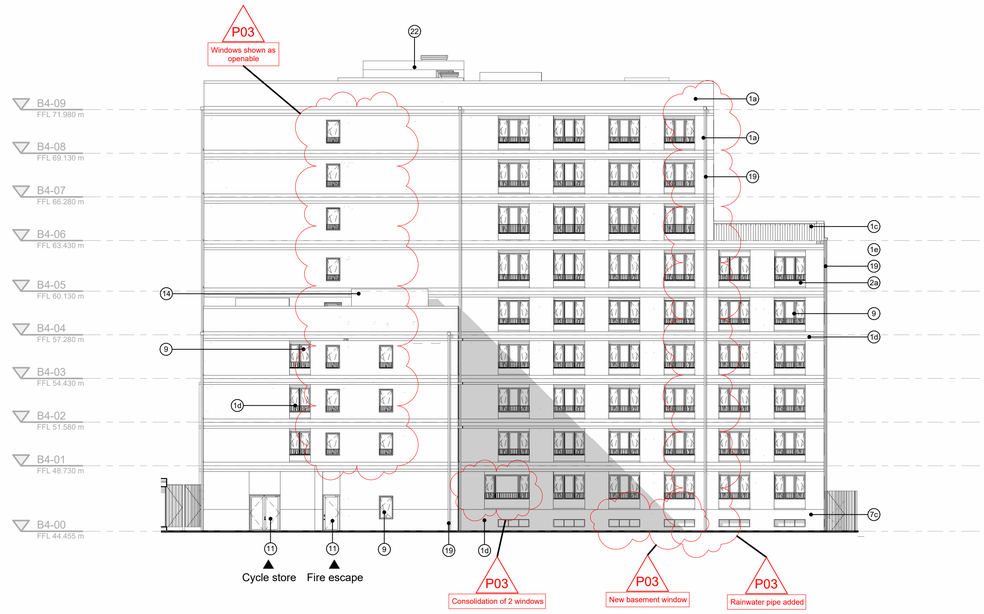

2 Proposed North Elevation
1 : 200

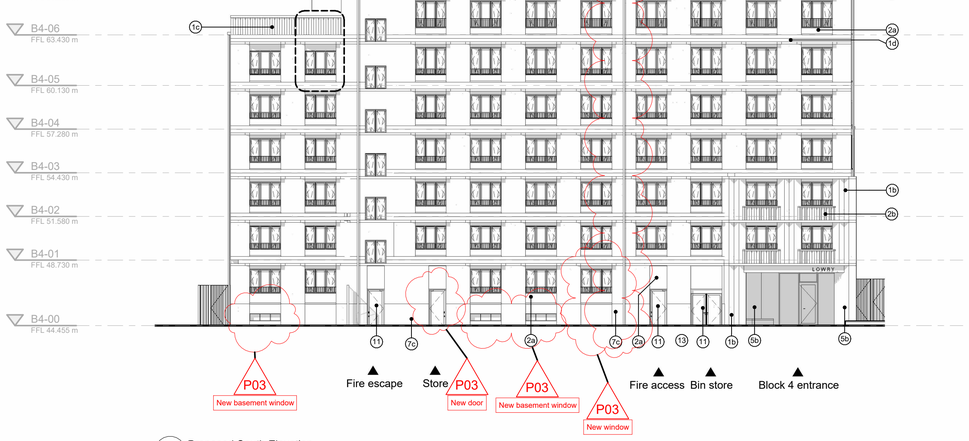

3 Proposed South Elevation
1 : 200

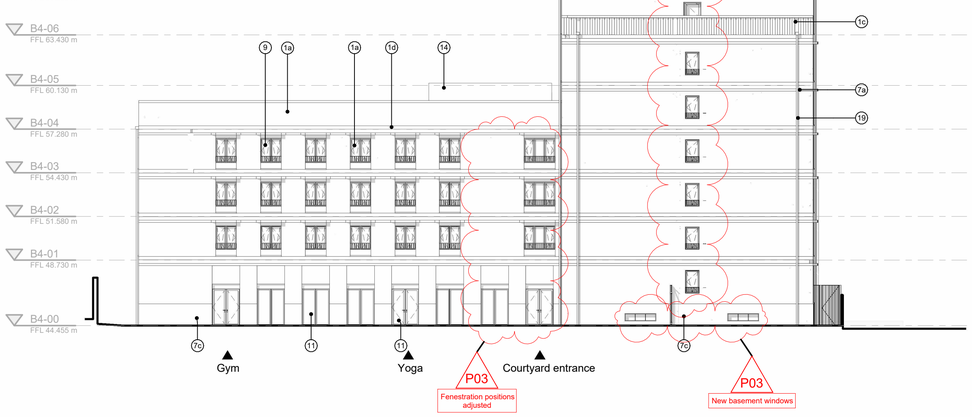

4 Proposed West Elevation
1 : 200

PROPOSED MATERIAL KEY:

1a. Brick type A (Harbourne Red Multi or similar approved) in stretcher bond
1b. Brick type A laid at 45° to create double serrated brick pier
1c. Brick type A laid at 45° to create serrated parapet
1d. Brick type A in double soldier course
2a. Brick type B (Ruby Glazed or similar approved) in stretcher bond
2b. Brick type B laid at 45° to create serrated spandrel panel
2c. Brick type B seating
3a. Brick type C (Willow Green Glazed or similar approved) in stretcher bond
3b. Brick type C laid at 45° to create serrated wall / seating
4a. Brick type D (Valley Green Glazed or similar approved) in stretcher bond
4b. Brick type D laid at 45° to create serrated wall / seating
5a. Brick type E (Atlantis Green Glazed or similar approved) in stretcher bond
5b. Brick type E laid at 45° to create serrated wall / seating
6a. Brick type F (Green glazed or similar approved) in stretcher bond
6b. Brick type F laid at 45° to create serrated wall / seating

7a. Precast pigmented concrete parapet / band / coping (colour: Cheshire Red)
7b. Precast pigmented concrete brise soleil (colour: Cheshire Red)
7c. Precast pigmented concrete panel (colour: Cheshire Red)
7d. Precast pigmented concrete canopy (colour: Cheshire Red)
7e. Precast pigmented seat top (colour: Cheshire Red)

8. Precast pigmented soffit cladding to entrances (colour: Cheshire Red)

9. PPC Aluminium composite window (RAL 3005)
10. PPC glazed automated opening vent (RAL 3005)
11. PPC metal door/window (RAL 3005)

12. PPC metal railing (RAL 3005)
13. PPC metal louvre (RAL 3005)
14. PPC metal plant screen (RAL 3005)
15. PPC metal fence (RAL 3005)
16. PPC metal entrance gate with diagonal stanchions (RAL 3005)
17. PPC metal signage (RAL 3005)
18. PPC metal illuminated signage (colour and appearance TBC)
19. PPC rainwater goods (RAL 3005)
20. PPC perforated metal panel (RAL 3005)

21. Mineral paint (colour: light red)

22. Stairs overrun (insulated render finish)
23. Lift Overrun (insulated render finish)

P03
New materials

All drawings to be read in conjunction with specifications, schedules and all other consultant information.

Do not scale from this drawing. Use written dimensions only. All dimensions to be checked on site. This drawing is based on dimensional survey information provided by others. Bell Phillips Architects cannot accept responsibility for the accuracy of this survey information.

Any errors or omissions to be reported to Bell Phillips Architects immediately, prior to work being carried out.

This drawing remains the copyright of Bell Phillips Architects.

Notes

0 2 4 10 20 m

Key Plan



Rev	Issued by	Description	Date
P03	RB	NMA Issue	24/10/25
P02	RB	Revised Block 4 Unit Mix	07/24
P01	RB	Final Planning Issue	04/24
P00	RB	Draft Planning Issue	03/24

REVISIONS

Project
0814 VICTORIA POINT
44 Hathersage Road, Manchester, M13 0FT

Title
Block 4 - Proposed Elevations

Date	Drawn by	Checked by	Scale at A1
	AW	RB	AS indicated

bell phillips
Unit 305, Metropolitan Wharf
70 Wapping Wall
London E1W 3SS
T 020 7234 9330
E info@bellphillips.com
W www.bellphillips.com

Status
PLANNING

Drawing Number	Revision
0814-BPA-ZZ-ZZ-DR-A-1213	P03