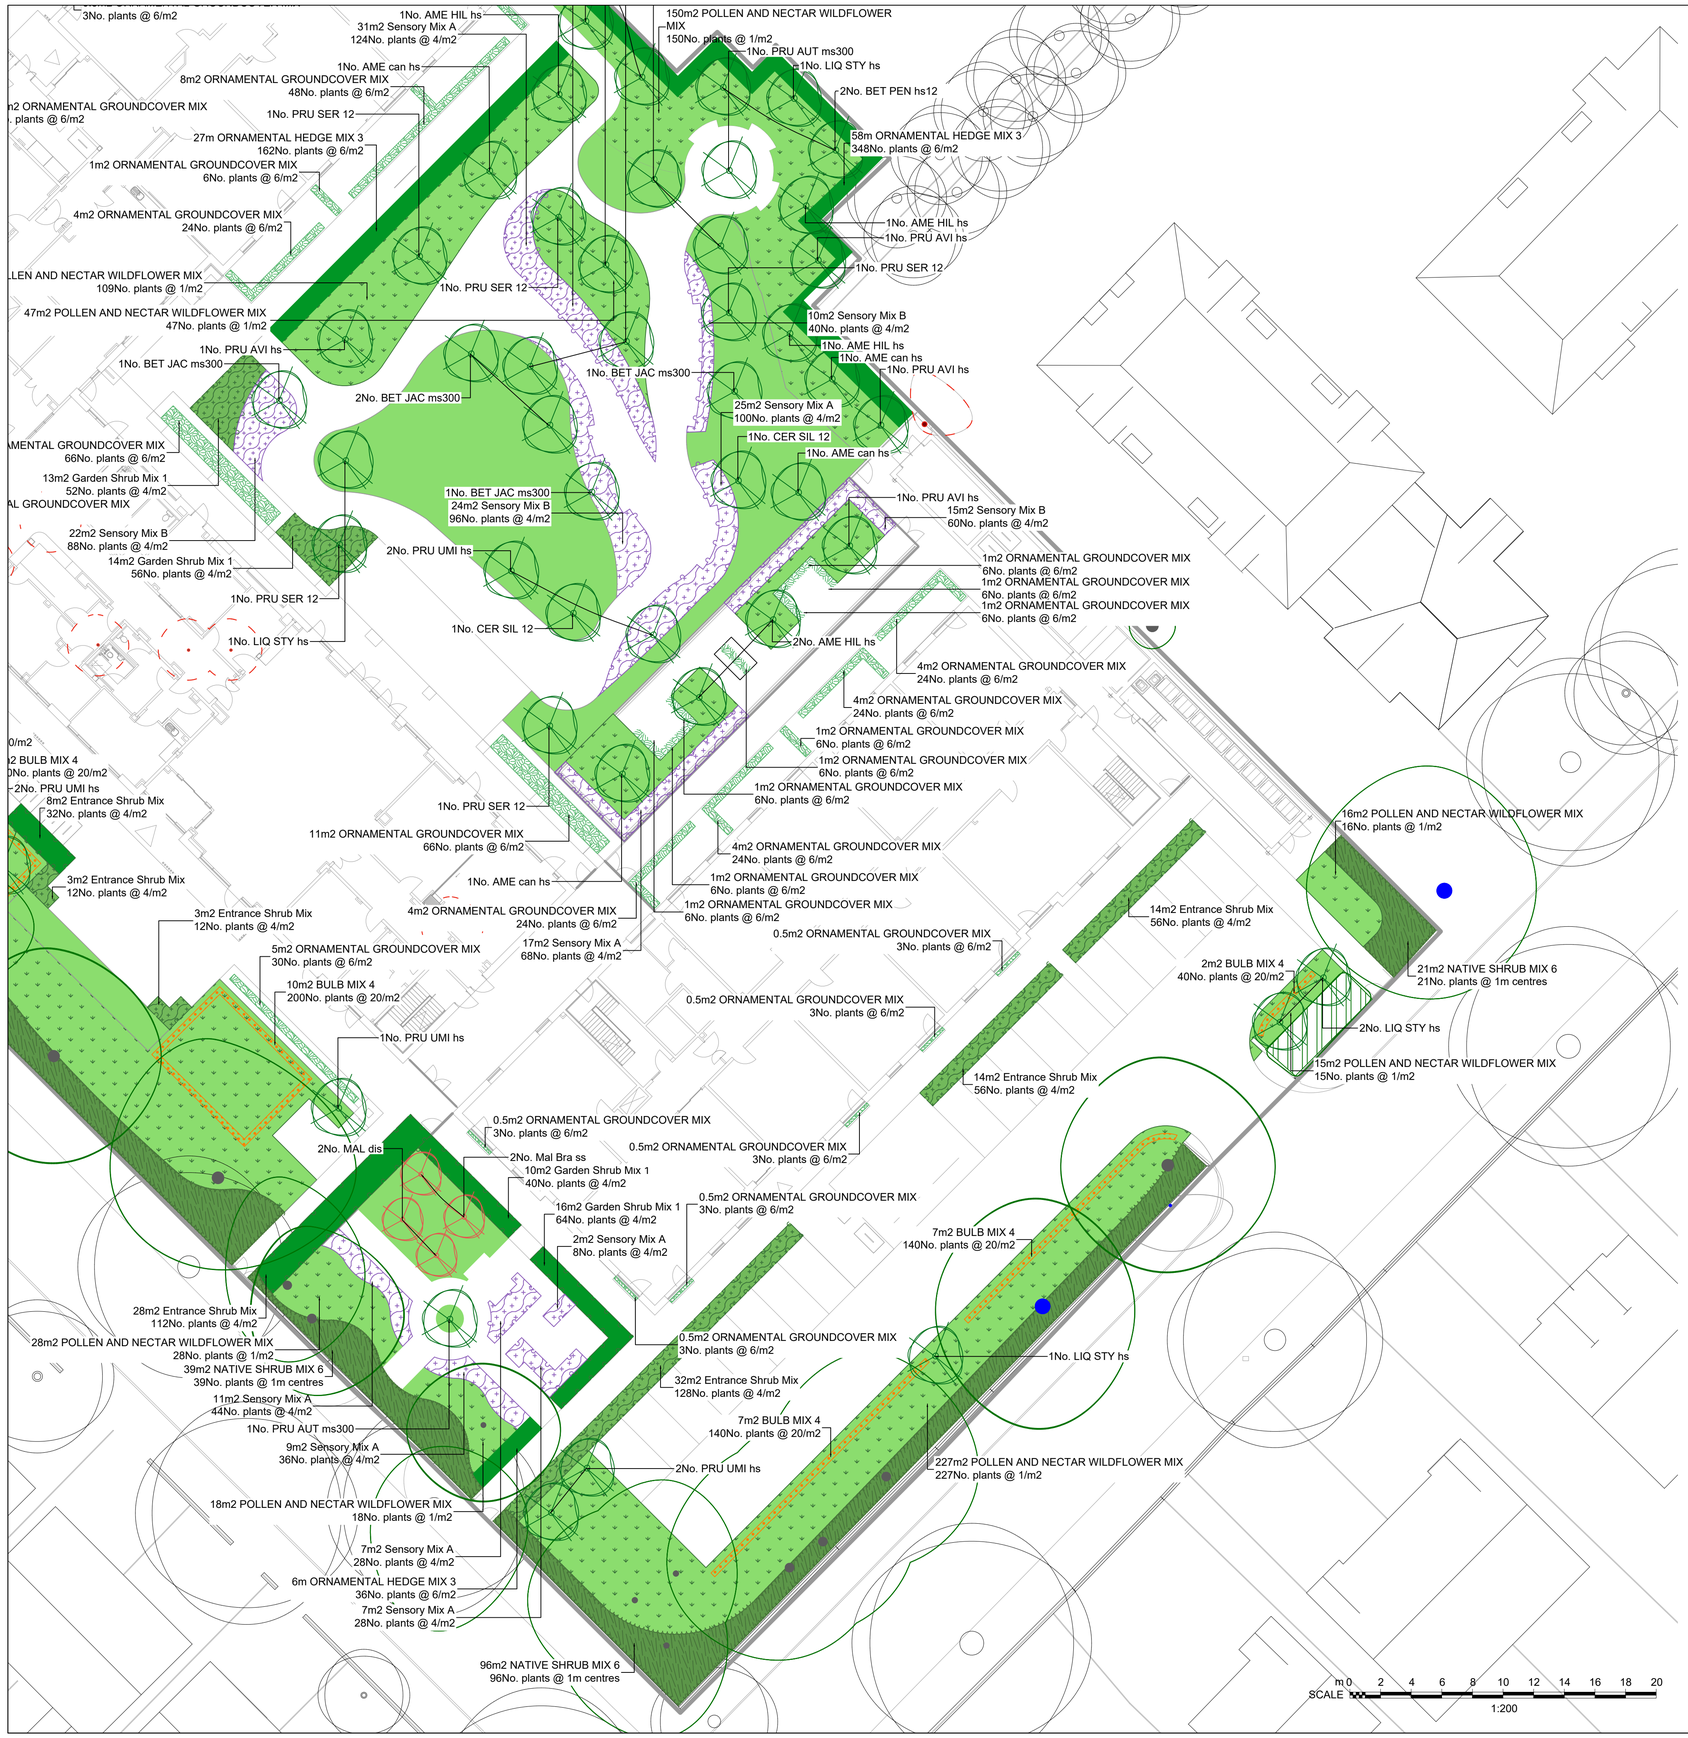

Plant Schedule

QTY	UNIT	CODE	PLANTNAME	STOCK	FORM	GIRTH/HEIGHT
Trees						
4	No.	AMEcan hs	Amelanchier canadensis	RB	STD	12-14cm
5	No.	AMEHIL hs	Amelanchier x grandiflora "Robin Hill"	RB	STD	12-14cm
5	No.	BETPEN hs12	Betula pendula	RB	STD	12-14cm
10	No.	BETJACms300	Betula utilis Jacquemontii	RB	MSTEM3	300-350cm
4	No.	CERSIL 12	Cercis siliquastrum	RB	STD	12-14cm
5	No.	LIQSTYhs	Liquidambar styraciflua	RB	STD	12-14cm
2	No.	MALdis	Malus domestica 'Discovery'	RB	STD	10-12cm
2	No.	Mal Bra ss	Malus domestica	RB	STD	10-12cm
10	No.	PRUUMI hs	Prunus 'Umineko'	RB	STD	12-14cm
4	No.	PRUAVI hs	Prunus avium	RB	STD	12-14cm
5	No.	PRUSER12	Prunus serrula	RB	STD	12-14cm
2	No.	PRUAUTms300	Prunus subhirtella "Autumnalis"	RB	MSTEM3	300-350cm

PERCENT	QTY	UNIT	PLANTNAME	STOCK	SIZE
Hedge Mixes					
29m NATIVE HEDGEROW MIX planted @5/m in a Double Staggered Row					
10%	15	No.	Acer campestre	B Trans	60-80cm
10%	15	No.	Cornus sanguinea	B Trans	60-80cm
10%	15	No.	Corylus avellana	B Trans	60-80cm
50%	73	No.	Crataegus monogyna	B Trans	125-150cm
5%	7	No.	Prunus spinosa	B Trans	60-80cm
5%	7	No.	Rosa canina	B Trans	60-80cm
91m ORNAMENTAL HEDGE MIX 3 planted @6/m2 in a Double Staggered Row					
25%	137	No.	Escallonia 'Donard Radiance'	C3L	40-60cm
25%	137	No.	Choisya ternata 'Sundance'	C3L	30-40cm
25%	137	No.	Hypericum 'Hidcote'	C3L	30-40cm
25%	137	No.	Viburnum opulus 'Compactum'	C3L	30-40cm
To be planted in species groups of approximately 10.					

PERCENT	QTY	UNIT	PLANTNAME	STOCK	SIZE
Plant Mixes					
65m2 ORNAMENTAL GROUNDCOVER MIX planted @6/m2					
20%	78	No.	Bergenia cordifolia	C1L	Full pot
20%	78	No.	Galium odoratum	C1L	Full pot
20%	78	No.	Geranium 'Johnson's Blue'	C1L	Full pot
5%	20	No.	Heuchera 'Key Lime Pie'	C1L	Full pot
20%	78	No.	Liriope muscari	C1L	Full pot
10%	39	No.	Luzula nivea	C1L	Full pot
5%	20	No.	Nepeta racemosa 'Walker's Low'	C1L	Full pot
Individual varieties to be planted in groups of approximately 3 or 5.					
300m2 NATIVE SHRUB MIX 6 planted @1m centres					
20%	60	No.	Corylus avellana	B Trans	60-80cm
20%	60	No.	Viburnum opulus	B Trans	60-80cm
15%	45	No.	Cornus sanguinea	B Trans	60-80cm
15%	45	No.	Prunus padus	B Trans	60-80cm
10%	30	No.	Crataegus monogyna	B Trans	60-80cm
10%	30	No.	Malus sylvestris	B Trans	60-80cm
10%	30	No.	Sambucus nigra	B Trans	60-80cm
Individual varieties to be planted in groups of approximately 3-7					
69m2 BULB MIX 4 planted @20/m2					
33%	455	No.	Galanthus nivalis	5-6cm	
33%	455	No.	Crocus vernus	5/+cm	
34%	469	No.	Narcissus pseudonarcissus	10-12cm	
Individual varieties to be planted in groups of approximately 7.					
1306m2 POLLEN AND NECTAR WILDFLOWER MIX planted @1/m2					
100%	1306	No.	No. Superior Pollen and Nectar Wildflower Seed Mix	Seed	
Seeded at 2g/m2 over prepared ground from Habitat Aid					
140m2 Sensory Mix A planted @4/m2					
13%	73	No.	Achillea millefolium	C2L	Full Pot
12%	67	No.	Rudbeckia fulgida sullivantii 'Goldsturm'	C2L	Full Pot
10%	56	No.	Perovskia 'Blue Spire'	C2L	20-30cm
10%	56	No.	Nepeta 'Six Hills Giant'	C2L	Full Pot
5%	28	No.	Echinops ritro	C2L	Full Pot
13%	73	No.	Stipa tennuissima	C2L	Full Pot
12%	67	No.	Molinia caerulea arundinacea 'Skyracer'	C2L	Full Pot
Individual varieties to be planted in groups of approximately 3-5.					
71m2 Sensory Mix B planted @4/m2					
10%	28	No.	Echinacea purpurea	C2L	Full Pot
15%	43	No.	Rudbeckia fulgida sullivantii 'Goldsturm'	C2L	Full Pot
20%	57	No.	Verbena bonariensis	C2L	Full Pot
20%	57	No.	Knipfofia	C2L	Full Pot
20%	57	No.	Stipa tennuissima	C2L	Full Pot
15%	43	No.	Molinia caerulea arundinacea 'Skyracer'	C2L	Full Pot
Individual varieties to be planted in groups of approximately 5.					
123m2 Entrance Shrub Mix planted @4/m2					
20%	98	No.	Hebe 'White Gem'	C3L	20-30cm
25%	123	No.	Hebe pinguifolia 'Pagei'	C3L	20-30cm
20%	98	No.	Pachysandra terminalis 'Variegata'	C3L	20-30cm
20%	98	No.	Spiraea japonica 'Little Princess'	C3L	30-40cm
15%	74	No.	Perovskia 'Blue Spire'	C3L	30-40cm
Individual varieties to be planted in groups of 5.					
15m2 Entrance Shrub Mix Shade planted @4/m2					
20%	12	No.	Skimmia japonica 'Rubella'	C3L	30-40cm
20%	12	No.	Hydrangea 'Preziosa'	C3L	30-40cm
20%	12	No.	Lonicera pileata	C3L	30-40cm
20%	12	No.	Prunus laurocerasus 'Otto Luyken'	C3L	30-40cm
20%	12	No.	Viburnum davidii	C3L	30-40cm
Individual varieties to be planted in groups of 3, 4 or 5.					
53m2 Garden Shrub Mix 1 planted @4/m2					
20%	42	No.	Hebe 'White Gem'	C3L	20-30cm
20%	42	No.	Hebe pinguifolia 'Pagei'	C3L	20-30cm
20%	42	No.	Pachysandra terminalis 'Variegata'	C3L	20-30cm
15%	32	No.	Lavandula angustifolia 'Hidcote'	C3L	30-40cm
15%	32	No.	Spiraea japonica 'Little Princess'	C3L	30-40cm
10%	21	No.	Perovskia 'Blue Spire'	C3L	30-40cm
Individual varieties to be planted in groups of 3, 4 or 5.					

Notes and Abbreviations

B	=	Bare root (bagged).
C	=	Container (or pot) grown, followed by size of the container (or pot).
FORM	=	Shape of tree as supplied by the nursery.
QTY	=	Quantity
RB	=	Rootballed (balled and wrapped).
Std	=	(clear stem) Standard.
STOCK	=	Root condition/protection method eg Bare root.
Trans	=	Transplant (or undercut seedling).

- Refer to specification for further information.
- All plants to be completely hardened off
- Substitutions to be agreed with Landscape Architect.

Do not scale this drawing (printed or electronic version).

Contractors must check all dimensions from site

This drawing is copyright and is for use on this site only. This drawing should be read in conjunction with all relevant consultants drawings and specialist subcontractors / supply chain drawings and specifications.

All works to be carried out in accordance with the latest British Standards / Codes of Practice unless specifically directed otherwise in the specification.

Responsibility for the reproduction of this drawing in paper form, or issued in electronic format, lies with the recipient to check that all information has been replicated in full and is correct when compared to the original paper or electronic image.

Graphical representations of equipment on this drawing have been co-ordinated, but are approximations only. Please refer to the specifications and / or details for actual sizes and / or specific contractor construction information.

Notes:-

Existing Tree - Removed
To be removed - refer to arboricultural drawings

Proposed Standard Tree Planting
Native and ornamental species

Proposed Fruit Tree Planting
Select standard

Existing Hedge / Vegetation
To be retained

Species Rich Native Hedge Planting
Native species mix

Proposed Ornamental Hedge Planting
Ornamental shrub

Proposed Groundcover Planting
Ornamental species mix.

Proposed Ornamental Shrub Planting
Ornamental shrub mix.
Maintained to maximum 1000mm high

Proposed Native Shrub Planting
Native shrub mix.

Proposed Sensory Mixed Planting
Herbaceous/ grass perennial & shrub mix.

Proposed Seasonal Bulb Planting
Native bulb mix.

Proposed Turf Grass
To amenity spaces and front gardens.

Proposed Wildflower Meadow
Species rich grass & wildflower seed mix.

REV.	DATE	DESCRIPTION	DRAWN	CHK'D
T05	26/03/26	TENDER UPDATE	AG	SW
T04	23/03/26	TENDER UPDATE	IG	SW
T03	27/02/26	TENDER UPDATE	IG	SW
T02	18/02/25	TENDER UPDATE	IG	SW
T01	23/01/25	FIRST TENDER ISSUE	IG	SW

U R B A N
G R E E N

A: Ground Floor, The Tower,
Deva City Office Park, Trinity Way,
Manchester M3 7BF

T: +44 (0) 161 312 3131

weareurbangreen.co.uk

Client:
GREAT PLACES HOUSING GROUP

Project:
RUSSELL ROAD EXTRA CARE

Title:
SOFT LANDSCAPE PLAN 2/2

Issue:
TENDER

Drawn:	Checked:	Approved:
RS	SW	SA
Project: UG2410	**Scale @ A1:** 1:200	**Date:** 23/01/25
Dwg No: UG_2410_LAN_SL_DRW_302		**Revision:** T05