© Buro Happold Limited or its group companies.
All Rights reserved. Buro Happold and its group companies assert (unless otherwise agreed in writing) their rights under s.77 to 89 of the Copyright, Designs and Patents Act 1988.

DO NOT SCALE THIS DRAWING.

HEALTH AND SAFETY INFORMATION

IN ADDITION TO THE HAZARDS/RISKS NORMALLY ASSOCIATED WITH THE TYPES OF WORK DETAILED ON THIS DRAWING, NOTE THE FOLLOWING


CONSTRUCTION.

MAINTENANCE/CLEANING/OPERATION.

DECOMMISSIONING/DEMOLITION.

Notes

1. ALL DIMENSIONS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.
2. DETAIL AS PER MCC DRAWING STANDARD DETAILS TR2

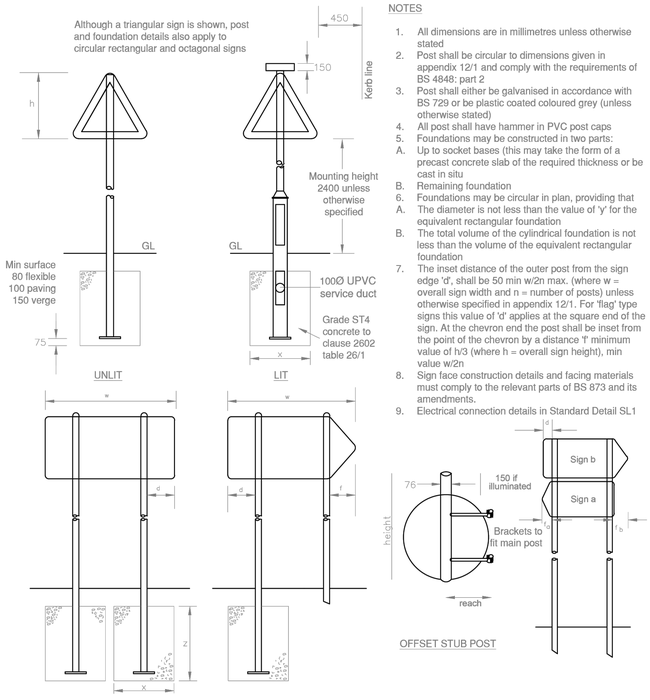

OFFSET STUB POST

NOTES

1. All dimensions are in millimetres unless otherwise stated
2. Post shall be circular to dimensions given in appendix 12/1 and comply with the requirements of BS 4848: part 2
3. Post shall either be galvanised in accordance with BS 729 or be plastic coated coloured grey (unless otherwise stated)
4. All post shall have hammer in PVC post caps
5. Foundations may be constructed in two parts:

A. Up to socket bases (this may take the form of a precast concrete slab of the required thickness or be cast in situ

B. Remaining foundation

6. Foundations may be circular in plan, providing that

A. The diameter is not less than the value of 'y' for the equivalent rectangular foundation

B. The total volume of the cylindrical foundation is not less than the volume of the equivalent rectangular foundation

7. The inset distance of the outer post from the sign edge 'd', shall be 50 min w/2n max. (where w = overall sign width and n = number of posts) unless otherwise specified in appendix 12/1. For 'flag' type signs this value of 'd' applies at the square end of the sign. At the chevron end the post shall be inset from the point of the chevron by a distance 'f' minimum value of h/3 (where h = overall sign height), min value w/2n
8. Sign face construction details and facing materials must comply to the relevant parts of BS 873 and its amendments.
9. Electrical connection details in Standard Detail SL1

Foundation Type	A	B	C	D	E	F	G	H	J	K
Width x	600	600	600	600	1000	1000	1000	1000	1000	1200
Length y	600	800	1000	1200	1200	1400	1600	1800	2000	2000
Depth z	600	600	600	600	1000	1000	1000	1000	1000	1000

TABLE 1: STANDARD FOUNDATION SIZES

Rev	Description	Date	Drn	Ch'd
A	FOR TENDER	15.11.2024	WM	CB

INFORMATION

Status of drawing

BUROHAPPOLD ENGINEERING

17 Newman Street
London
W1T 1PD
UK

Tel: +44 (0)20 7927 9700
Fax: +44 (0)870 787 4145
Email: 0042912@burohappold.com
Web: www.burohappold.com

Architect *SEW*

Project **MAYFIELD DEVELOPMENT PARTNERSHIP**

Drg Title HIGHWAY WORKS
PROPOSED HIGHWAYS DETAILS
SHEET 3

Scales@A1	AS SHOWN	Job No.	0042912
Drawn by	WM	Date	Nov-24
Checked by	CB	Rev	A

Drawing No. 0042912-BHE-XX-XX-DR-C-2852

Wsns Mehmood P:\0042912 Mayfield Park Manchester\Infrastructure\FDB - Infra\01_Sheet\0042912-BHE-XX-XX-DR-C-2852.dwg