


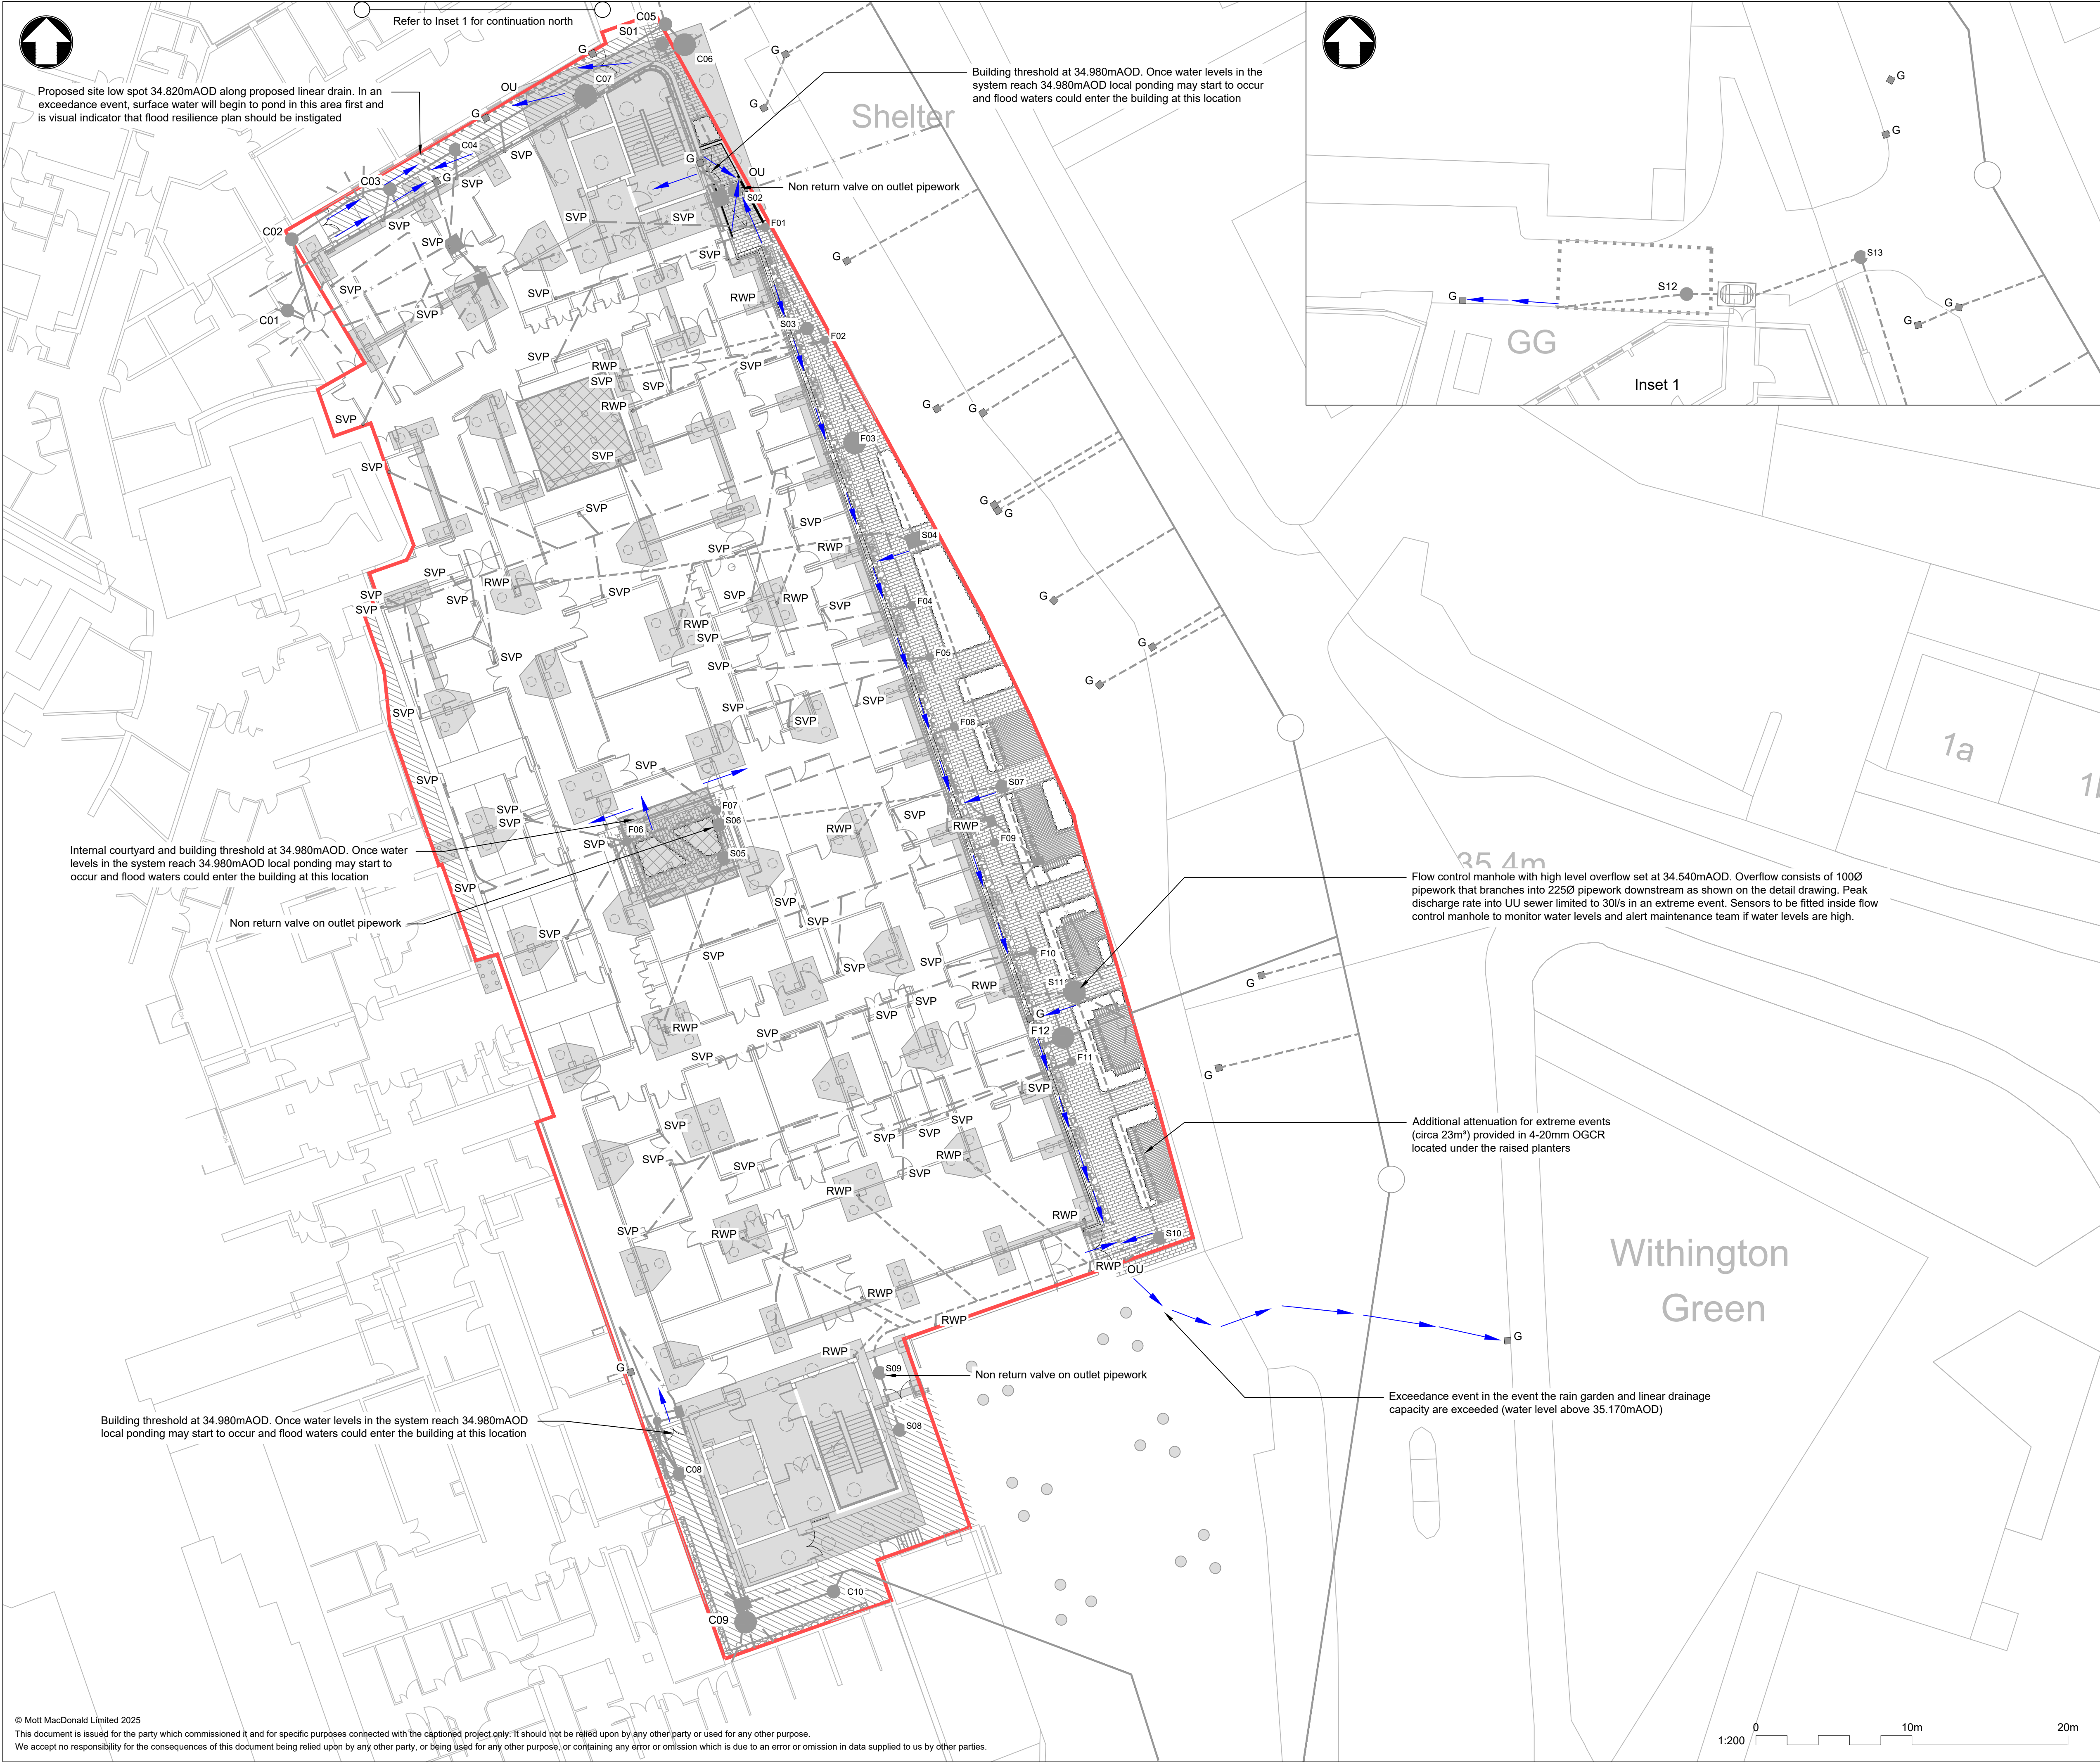

Notes

- This drawing is to be read in conjunction with all relevant drawings.
- Do not scale from this drawing.
- The proposed drainage system has been designed to attenuate rainfall for the 1 in 100yr + 45% (upper end) climate change event within the site with no surface flooding. The system also has additional attenuation (circa 23m³) within 4-20mm OGCR under the raised planters for events in excess of the 1 in 100yr + 45% climate change event. An additional high level emergency overflow is also included in the flow control manhole in the most extreme events to discharge additional surface water offsite.

Key to symbols

- Proposed red line boundary
- Exceedance flow path
- Existing surface water drain and manhole
- Existing foul drain and manhole
- Existing combined water sewer and manhole
- Existing road gully
- Proposed surface water and manhole
- Proposed foul water and manhole
- Proposed perforated pipe
- Proposed linear drain and outlet unit
- Proposed rain water pipe connection
- Proposed foul soil vent pipe connection
- Existing drain to be abandoned
- Existing manhole to be abandoned
- Existing road gully to be abandoned
- Proposed crane foundation (Crane Foundation shown indicatively. Size and exact setting out TBC. Base shown here is based on CCHWC-AJP-01-00-DR-S-01415 from Countess of Chester Hospital project
- Proposed Class 1 Interceptor

Reference drawings

CASICD-MMD-XX-XX-DR-D-100010-100015 Typical Details
CASICD-MMD-XX-XX-SH-D-000001 MH Schedule
CASICD-MMD-XX-XX-DR-C-00001 Proposed Footway General Arrangement
CASICD-HLEA-XX-XX-M3-MEP-100001-P27 MEP Model
CASICD-ITR-XX-00-SK-L-900101 & 900102 Rev P02 Landscape General Arrangement
CASICD-ITR-XX-00-DR-L-900501 & 900502 Landscape Proposed Levels Plan
CASICD-MMD-XX-FN-DR-S-000230 Foundation Zone 1 GA Plan
CASICD-MMD-XX-FN-DR-S-000231 Foundation Zone 2 GA Plan
CASICD-DAY-XX-XX-M3-A-000001_P30 Architectural Model
CASICD-ITR-XX-XX-SU-K-000015 Drainage Survey
CASICD-ITR-XX-00-SK-L-900101-P02 Landscape General Arrangement
United Utilities Adopted Sewer Records
59603-SUR-TOP-(Published)(06.01.23) Topographical Survey
59603-UG1 to UG5 Underground Services Survey

P02	19/12/2025	CC	Revised exceedance plan	AJP	AS
P01	12/12/2025	CC	Issued for IHP comment	AJP	AS
Rev	Date	Drawn	Description	Ch'k'd	App'd

Status Stamp

PRELIMINARY

M

MOTT

MACDONALD

Mott MacDonald
4th Floor, Derwent House
150 Arundell Gate
Sheffield, S1 2JY
United Kingdom
T +44 (0)114 236 1242
F +44 (0)114 272 4699
W www.mottmac.com

Client

The Christie NHS Foundation Trust

Title

The Christie Advanced Scanning & Imaging Centre Development Exceedance Plan

Designed	J Lea-Wilson	JLW	Eng. check.	A J Precious	AJP
Drawn	C Chau	CC	Coordination	C Smith	CS
Dwg. check.	J Lea-Wilson	JLW	Approved	A Simpson	AS
MMD Project Number	100110787	Scale at A1	1:200	Security	STD
Suitability Description	Suitable for Review and Comment				Suit. Code
Drawing Number	CASICD-MMD-XX-XX-DR-C-100016				Rev
					P02