



BUILDING SERVICES ENGINEERS
LIVERPOOL

ALL RIGHTS RESERVED © COPYRIGHT ABB ENGINEERING (M.S.D) LTD
& ABB ENGINEERING (E.S.D) LTD.

REVISION	ITEM REVISED	DATE
P01	PRELIMINARY ISSUE	16.05.25
C01	CONSTRUCTION ISSUE	12.06.25
C02	CONSTRUCTION ISSUE	28.08.25
C03	CONSTRUCTION ISSUE- VALVE REFERENCES ADDED	05.09.25

VENTILATION NOTES

1. DO NOT SCALE FROM THIS DRAWING. USE FIGURED DIMENSIONS ONLY UNLESS OTHERWISE STATED. ALL DIMENSIONS ARE GIVEN IN MILLIMETRES OR METRES. ALL DIMENSIONS TO BE CHECK ON SITE BY INSTALLERS PRIOR TO COMMENCEMENT OF WORKS.
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT DRAWINGS / DOCUMENTS / SCOPE OF WORKS AND SPECIFICATIONS. THIS DRAWING SHOULD ONLY BE USED FOR ITS INTENDED PURPOSE.
3. BEFORE COMMENCEMENT OF WORK ASSOCIATED WITH THIS DRAWING REFER TO THE APPROPRIATE METHOD STATEMENTS AND RISK ASSESSMENTS.
4. ALL DUCTWORK SYSTEMS TO BE INSTALLED IN ACCORDANCE WITH DW/144 SPECIFICATION FOR SHEET METAL DUCTWORK FOR LOW PRESSURE "CLASS A" SYSTEMS.
5. ALL DUCTWORK TO BE SUPPORTED IN ACCORDANCE WITH DW/144 ARRANGEMENT OF BEARERS AND HANGERS.
6. ACCESS PANELS TO BE PROVIDED ADJACENT TO ALL FIRE DAMPERS.
7. INSPECTION PANELS TO BE PROVIDED ADJACENT TO ALL VOLUME CONTROL DAMPERS.
8. ALL ACCESS/INSPECTION HATCHES ARE TO BE PROPRIETARY MANUFACTURED WITH QUICK RELEASE CATCHES AND SELF SEALING GASKETS.
9. ALL ACCESS/INSPECTION PANELS SHALL REMAIN ACCESSIBLE, THE INSULATION CONTRACTOR SHALL SUITABLY DRESS THE EDGES OF THE INSULATION TO THE EDGE OF THE ACCESS OPENING.
10. THE USE OF FLEXIBLE DUCTWORK SHALL BE LIMITED TO 500mm IN LENGTH TO MAKE FINAL CONNECTIONS ONLY.
11. DUCTWORK SHALL BE MANUFACTURED WITH GRADUAL TRANSFORMATIONS AND CHANGES OF SHADE/DIRECTION.
12. TURNING VANES SHALL BE INSTALLED IN ALL RECTANGULAR SECTION DUCTWORK AT ALL CHANGES IN DIRECTION.
13. SPLITTERS SHALL BE INCORPORATED WITHIN RECTANGULAR DUCTWORK WITH AN ASPECT RATIO OF GREATER THAN 4:1 AS DW/144
14. ALL GRILLES AND DIFFUSERS SHALL HAVE A FINISH/COLOUR TO SUIT THE ARCHITECTS REQUIREMENTS.
15. ALL FANS SHALL BE MOUNTED COMPLETE WITH ANTI-VIBRATION MOUNTINGS.
16. BALANCING AND CONTROL DAMPERS SHALL BE INCLUDED WITHIN THE DUCTWORK SECTIONS AS INDICATED UPON THE DRAWINGS AND PROVIDED WITH AN INDICATING DEVICE ON THE OUTSIDE OF THE DAMPER PROVIDING VISUAL INDICATION OF THE DAMPER POSITION.
17. ALL AIR DISTRIBUTION DUCTS PASSING THROUGH ELEMENTS OF STRUCTURE FORMING FIRE COMPARTMENTS SHALL INCORPORATE A FIRE DAMPER. THE FIRE DAMPER ARRANGEMENT INCLUDING SUITABLE HVCA INSTALLATION FRAME (IF APPLICABLE), SHALL HAVE A FIRE RESISTANCE RATING EQUAL TO THE ELEMENT WHICH IT PENETRATES WITH A MINIMUM RATING OF 1 HOUR.
18. ALL BRANCHES FROM THE MAIN DISTRIBUTION DUCTS SHALL BE BY A SHOE-BRANCH FITTING.
19. DUCTWORK TO BE THERMALLY INSULATED AS INDICATED WITHIN THE MECHANICAL SPECIFICATION.
20. VOLUME CONTROL DAMPERS TO BE PROVIDED ON ALL MAIN BRANCHES AND ALL FINAL CONNECTIONS TO GRILLES.
21. FUSIBLE LINK FIRE DAMPERS TO BE PROVIDED WHERE DUCTS PASS THROUGH CAVITY BARRIERS / FIRE COMPARTMENTATION IN COMPLIANCE WITH THE FIRE ENGINEERS REPORT.
22. DUCTWORK CONNECTIONS TO FIRE & SMOKE DAMPERS MUST BE SEALED WITH AN APPROVED DUCTWORK SEALER AND FIXED WITH LOW RESISTANCE FIXINGS SUCH AS ALUMINIUM.

LEGEND

- EF - EXTRATCT FAN
- HRU - HEAT RECOVERY UNIT
- SG - SUPPLY GRILLE
- EG - EXTRACT GRILLE
- RG - RETURNS GRILLE
- FD - FIRE DAMPER
- VAV - VARIABLE AIR VOLUME
- HB - HEATER BATTERY
- VCD - VOLUME CONTROL DAMPER
- ATT - ATTENUATOR
- TG - TRANSFER GRILLE
- DT - DOOR TRANSFER GRILLE
- SV - SMOKE VENT
- AOV - AUTOMATIC OPENING VENT

SYMBOL	DESCRIPTION
	SUPPLY DUCTWORK
	EXTRACT DUCTWORK
	FRESH AIR DUCTWORK
	EXHAUST DUCTWORK
	VOLUME CONTROL DAMPER
	FIRE DAMPER
	SUPPLY GRILLE
	EXTRACT GRILLE
	HEATER BATTERY

Ex1 Ex2 Ex3 Ex4 Ex5

ExA

ExC

ExD

FOR CONTINUATION REFER TO
DRAWING NO. 230565-ABE-ZZ-01-DR-M-1502

FOR CONTINUATION REFER TO
DRAWING NO. 230565-ABE-ZZ-01-DR-M-1502

FOR DETAILS OF PLANT DECK
PLEASE REFER TO DWG No.
230565-ABE-ZZ-RF-DR-M-1502

700x500 SUPPLY & EXTRACT
TO GENERAL AREAS &
600x300 SUPPLY & EXTRACT
TO HYDROTHERAPY

350x250 SUPPLY & EXTRACT
DROP TO BELOW TO SERVE
GENERAL AREAS

650x400 SUPPLY & EXTRACT
DROP TO BELOW TO SERVE
CHANGING AREAS


600x300 SUPPLY & EXTRACT
DROP TO BELOW TO SERVE
HYDROTHERAPY

800x400 KITCHEN SUPPLY
& EXTRACT DROP FROM ABOVE

AHU-03/4
GYM/CHANGE

AHU-01
HYDROTHERAPY

Lower Roof Plant Deck

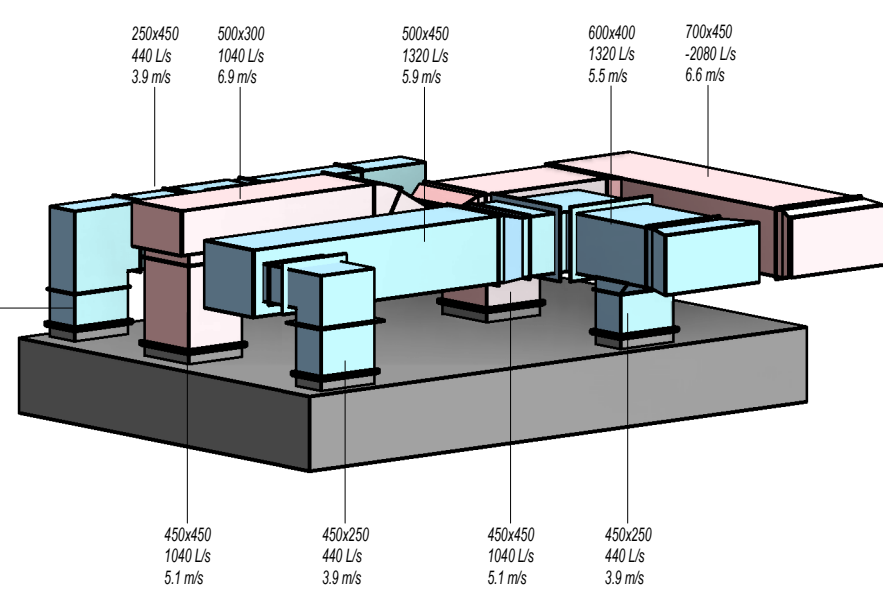

Kitchen Canopy



First Floor - Ventilation Layout

1 : 100

CONSTRUCTION

CLIENT



ARCHITECT



CONTRACT

MCWFC

TITLE

FIRST FLOOR - VENTILATION SERVICES

DRAWN

SK

CHECKED

PG

SCALE

As indicated @ A1

DATE

FEB 24

DRAWING No

230565-ABE-ZZ-01-DR-M-1501

REV

C03



Holly Terrace • 9-17 Derby Lane
Old Swan • Liverpool • L13 6QA
T: 0151 228 4661 • F: 0151 220 4206
email: info@abeng.co.uk
website: www.abeng.co.uk

