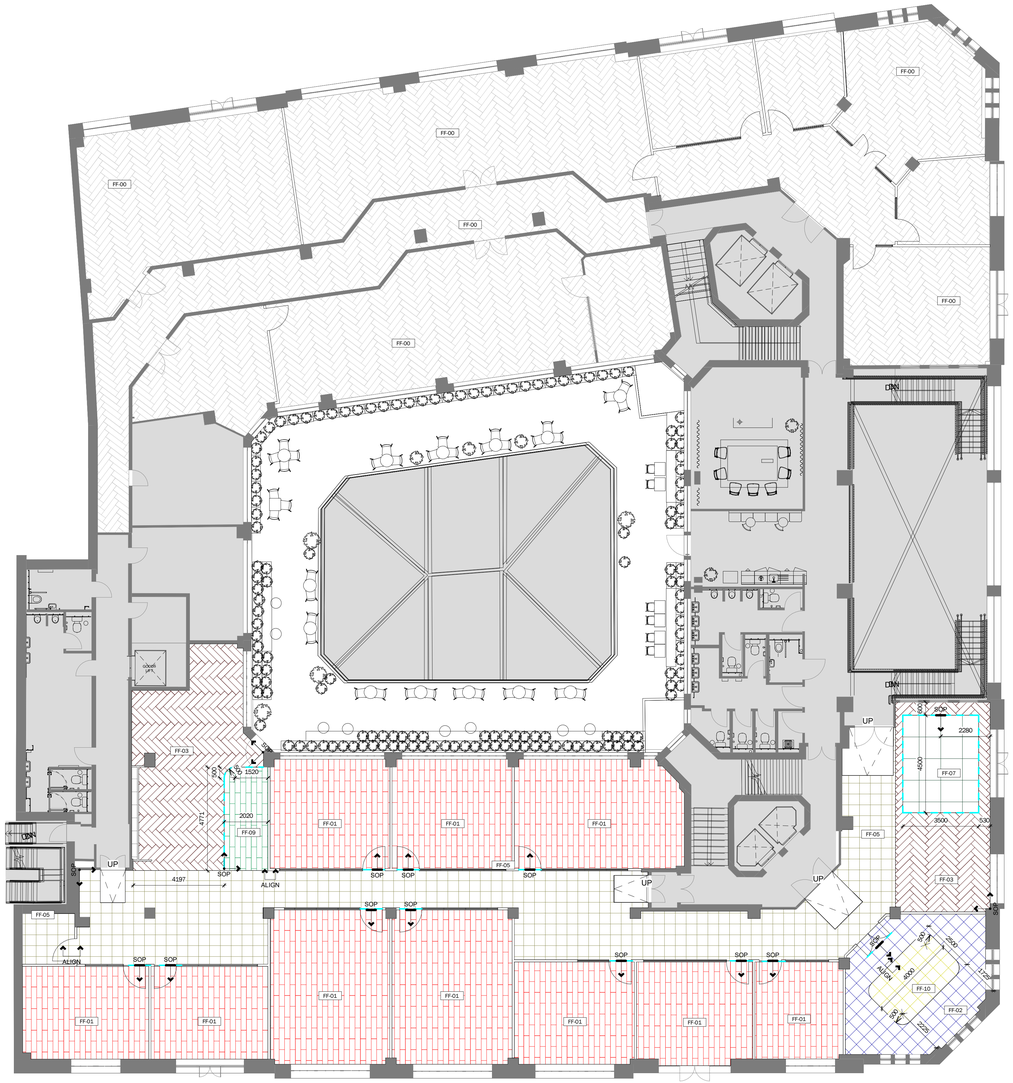


Floor Finishes Layout - 01

1 : 100

NOTE

ALL FINISHES ARE INDICATIVE PENDING CLIENT FINAL REVIEW AND SIGN OFF

31 - Floor Finish - Types Key

-	Type Mark	Image	Description	Manufacturer	Range & Colour	Lay method
	FF-00		Existing Parquet floor	Existing Floor	Wooden Parquet Floor	Existing
	FF-01		Carpet floor finish with 250x 1000x 7.6mm tile	Interface	Upon Common Ground Drybark- Desert Neutral 2529001	Ashlar Lay
	FF-02		Carpet floor finish with 500x500x 6mm tile	Interface	Composure Harmonious 4169015	Random Lay
	FF-03		Luxury Vinyl Flooring with 100x 500x 2.5mm tile	Tarkett	Inspiration Classics English Oak Classical – Parquet Ref. 24520008 OPTION: Karndean Spring Oak Parquet Code: AP01	Herringbone
	FF-04		Luxury Vinyl Flooring with 2.5mm Thickness	Karndean	Heritage Collection Landsown Code: LANS-04	Random Lay
	FF-05		Carpet floor finish with 500x500x 6.4mm tile	Shaw Contract	Interlaced Taskworx® Tile, 5T645 Oatmeal 46111	Random Lay
	FF-06		Carpet floor finish with 500x500x 5.1mm tile	Shaw Contract	Poised Ecoworx S® Tile, 5T511 Warmth 10101	Random Lay
	FF-07		Carpet floor finish with 1000x1000x 7.7mm tile	Interface	TBC Pine 7191002	Random Lay
	FF-08		Carpet floor finish with 250x 1000x 4.5mm tile	Interface	Lasting Impressions Collection Heirloom- Merino Wool A03603	Ashlar Lay
	FF-09		Carpet floor finish with 250x 1000x 8.6mm tile	Interface	Dressed Lines Collection Angular Times- Olive 1906008	Ashlar Lay
	FF-10		Carpet floor finish with 500x500x 8.7mm tile	Interface	TBC	Random Lay

Symbols Key

Out of scope
FF-00 Floor finish tag
Floor finish direction
SOP Floor start set out point
SOP Floor set out point
SOP Carpet tile / Ceramic tile in enclosed room to be centered to door opening
Centre line
ALIGN Align edges
SSS Transition Trim

Drawings are the sole property of Interaction, and may not be used, transferred, or disclosed to a third party without the express permission of Interaction. Do not scale from this drawing. Contractor to verify all dimensions, levels, and components on-site. Any discrepancies shall be addressed in writing to Interaction prior to the commencement of the work, otherwise the Contractor shall bear full responsibility for any associated cost. This drawing is to be read in conjunction with all other documentation. Building parameters taken from as built drawings provided. Check survey undertaken only, subject to statutory approval. All dimensions shown are in millimetres unless otherwise shown.

0 1 2 3 4 5 6 7 8

Metres

N

W E

S

31 - Floor Finish Notes

1. Drawing to be printed in colour
2. All floor boxes to match floor finish on which mounted.
3. New and existing floor levels to be adjusted to suit floor finish build ups. All floor finishes to be level unless otherwise stated.
4. Angle trim required between all changes in floor finishes unless otherwise stated.
5. All floor finish transitions which meet in a doorway should transition centred to doorway threshold.
6. All thicknesses shown in type schedule refers to the product itself and does not refer to substrate or backing.
7. Additional pedestals may be required in some areas. To be confirmed by sub contractor.
8. Expansion/ movement joint final locations to be determined on site and should be considered in conjunction with the relevant British standard codes of practice. Final locations to be confirmed by sub contractor.

REV	DESCRIPTION	DATE
P01	LDC Issue	11/12/2025
P00	Issued for comment	05/12/2025

Project: Block-Sunlight House

Address: Little Quay St, Manchester M3 3HP

interaction
The Quarter, 3-4 Edgar Mews, Bath, BA1 2FX
01225 465 600 | info@interaction.uk.com
interaction.uk.com

Drawing Title: Floor Finishes Layout - 01

Level 01

File Name: BLK-INT-SH-01-DR-I-31-101

Project Number	Level	Drawing Number
B2473	01	31-101

Drawing Status	Revision
For Information	P01

Drawing Scale @ A0	Drawn by	Checked by	Date
1 : 100		GD	12/05/25