
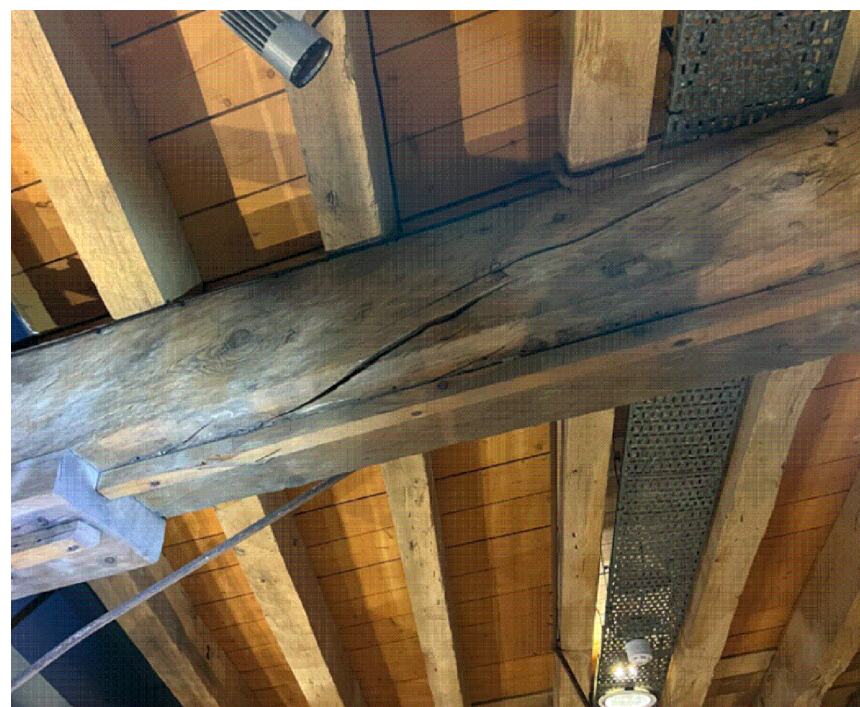


1. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH ALL RELEVANT ARCHITECTS, ENGINEERS AND SPECIALIST DRAWINGS AND SPECIFICATIONS
2. DO NOT SCALE FROM THIS DRAWING IN EITHER PAPER OR DIGITAL FORM. USE WRITTEN DIMENSIONS ONLY.

1. THE CONTRACTOR IS RESPONSIBLE FOR THE DESIGN AND INSTALLATION OF TEMPORARY WORKS. THEIR PROPOSALS MUST BE SUBMITTED TO THE STRUCTURAL ENGINEER SUFFICIENTLY IN ADVANCE OF THE WORKS STARTING TO PERMIT COMMENT. UNDER NO CIRCUMSTANCES SHOULD ANY STRUCTURAL ALTERATIONS BE CARRIED OUT PRIOR TO THE STRUCTURAL ENGINEER COMMENTING ON THE CONTRACTORS TEMPORARY WORKS PROPOSALS.
2. REPAIR DESIGNS SHOWN INDICATE PRESCRIPTIVE METHODS AND MATERIALS TO BE USED.
3. ROTAFIX RESWOOD TIMBER ENGINEERING SYSTEM OR SIMILAR & APPROVED TO BE USED FOR ALL RESIN/ADHESIVE BASED REPAIRS.
4. BOLTS TO BE GRADE 8.8
5. STEEL PLATES TO BE S355
5. REFER ALSO TO CONSBEE STRUCTURAL SPECIFICATION.



C1	25.05.23	CONSTRUCTION ISSUE	KDE	SW
T2	13.03.23	TENDER ISSUE	KDE	SW
T1	10.02.23	TENDER ISSUE	KDE	HM
Rev	Date	Description	Drawn	Check

conisbee | Consulting Structural Engineers
Consulting Civil Engineers

London • Cambridge • Norwich

1-5 Offord St London N1 1DH
Telephone 020 7700 6666
www.conisbee.co.uk

Drawing Status	
CONSTRUCTION	
Project	
SIM - 1830 WAREHOUSE ESSENTIAL WORKS & REPAIRS	
Title	
TYPICAL STRUCTURAL REPAIRS ROOF DETAILS SHEET 1	
Drawing No	
220627-CO-XX-ZZ-DR-S-4101	
Revision	
C1	
Date	FEB 2023
Scale	1:10 @ A1
Drawn	KDE
Engineer	HM
Project No	220627