

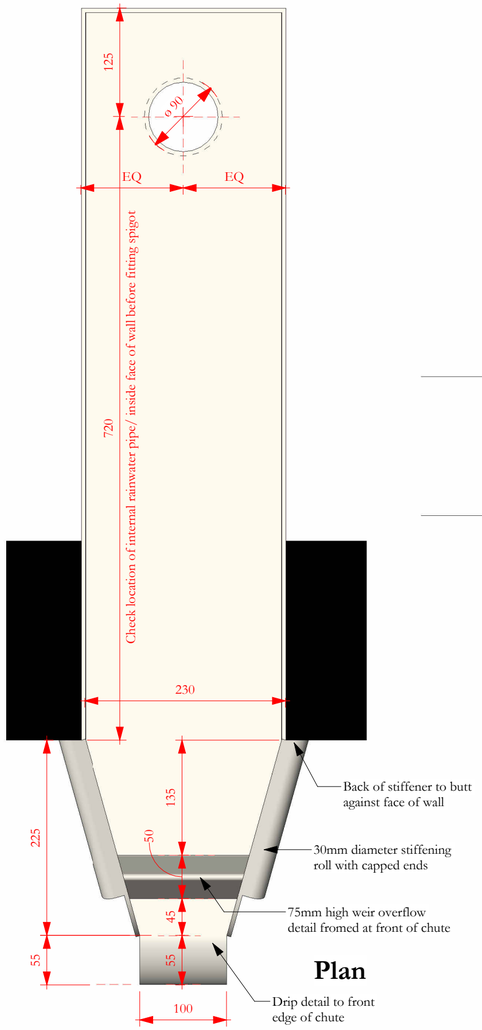


Plan

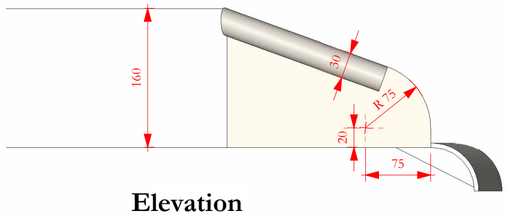


Elevation parallel with tapered side

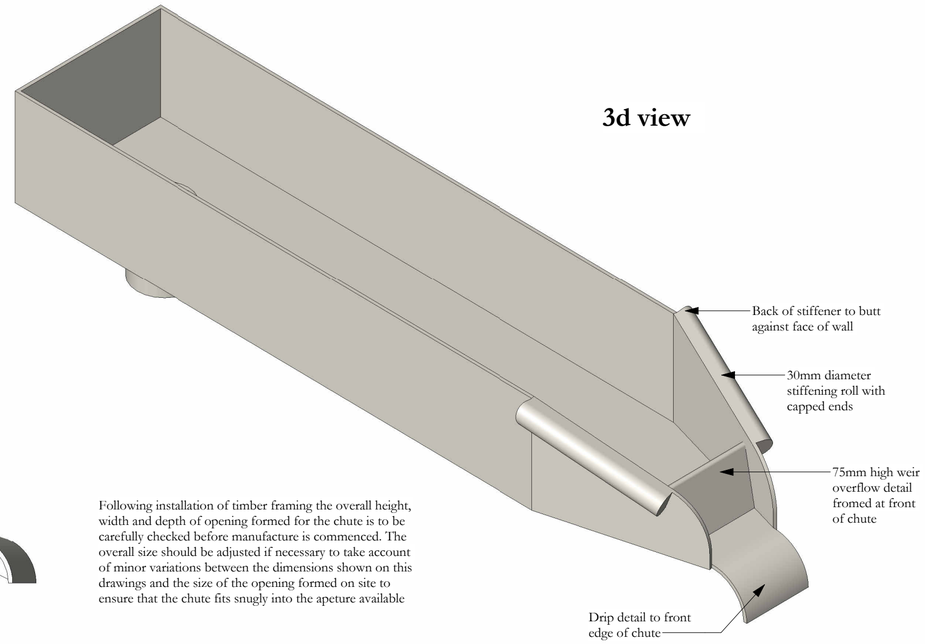


3d view

Following installation of timber framing the overall height, width and depth of opening formed for the chute is to be carefully checked before manufacture is commenced. The overall size should be adjusted if necessary to take account of minor variations between the dimensions shown on this drawings and the size of the opening formed on site to ensure that the chute fits snugly into the apeture available


Lead chute to be fabricated from code 8 lead sheet. The main body of the chute is to be formed from one sheet of lead with folded and bossed details to front and side and welded joints to concealed corners on the rear face

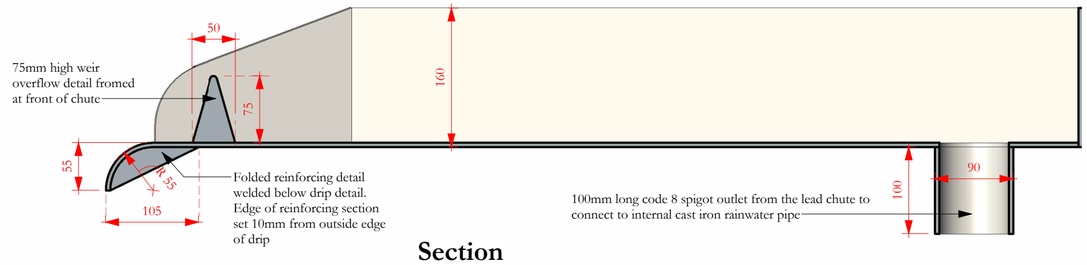

Section

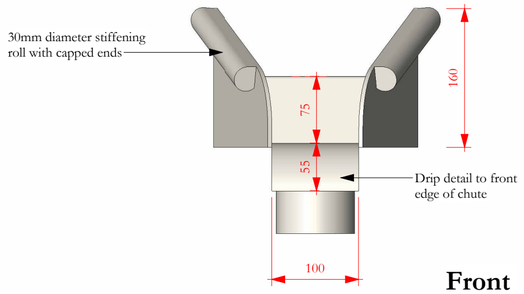

Front Elevation

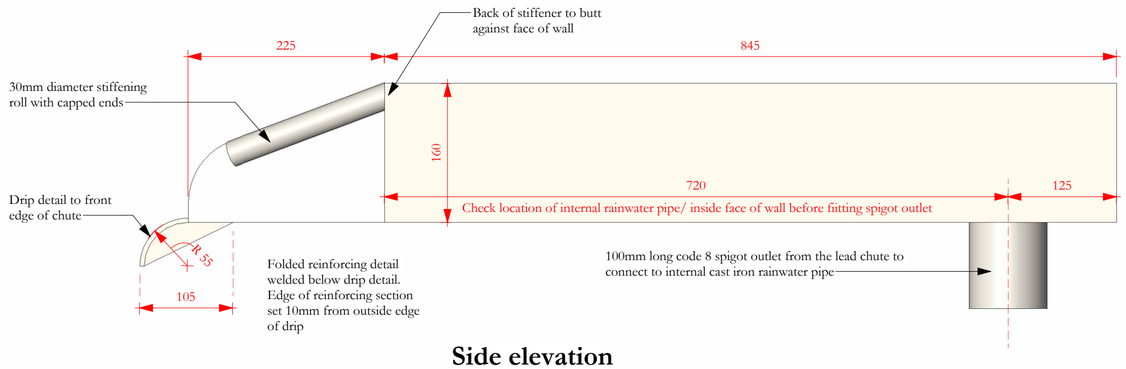

Side elevation

SCALE BAR
1 to 5



Scale Bars to be used as guidance only - refer to sheet size below

1:100	mm	1000	3000	5000	7000			
1:200	mm	5000	8000	10000	12000			
1:500	M	5	15	25	35			
1:1250	M	10	30	50	70	90		

Notes:
Drawings are based on survey data and may not accurately represent what is physically present.
Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.
All dimensions are in millimeters unless noted otherwise.
Purcell shall be notified in writing of any discrepancies.

ISSUE	DATE	APPROVED	DRAWN	DESCRIPTION
	13/05/2024	JC	GR	First issue

OUR TOWN HALL PROJECT

PURCELL

Project Office, Room 308, Town Hall, MANCHESTER M60 2L1
+44 (0) 7970 097 432
www.purcelluk.com

PROJECT STATUS	RIBA stage 5
CLIENT	Manchester City Council
PROJECT	Our Town Hall
DRAWING TITLE	Lead chute for rainwater pipe RWP 105a roof NRp01
SIZE & SCALE	A2: 1 : 5
DRAWING STATUS	S4 Construction
JOB NUMBER	236959
DRAWING NO.	OTH-PUR-TH-RF-DWG-A-7479
REV	-

© PURCELL 2019. PURCELL ® IS THE TRADING NAME OF PURCELL ARCHITECTURE LTD.