

AS PROPOSED FENCING SECTION

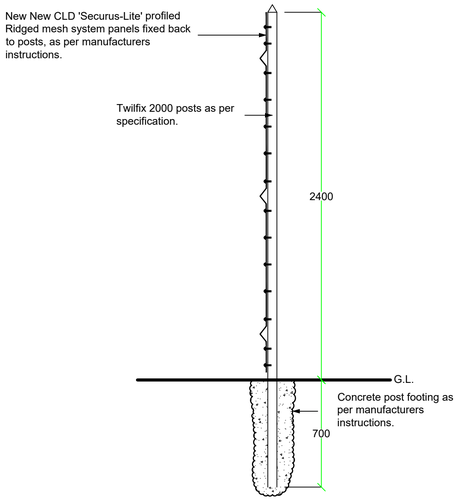


AS PROPOSED GATE A

Gates: G1

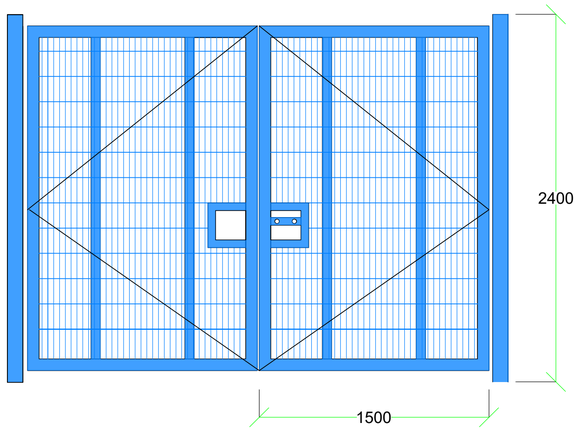


AS PROPOSED GATE B

Gates: G2, G3, G4, G6

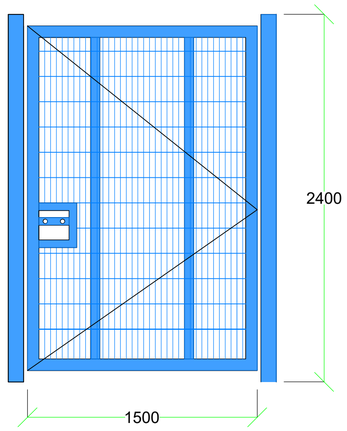

AS PROPOSED GATE C

Gates: G5

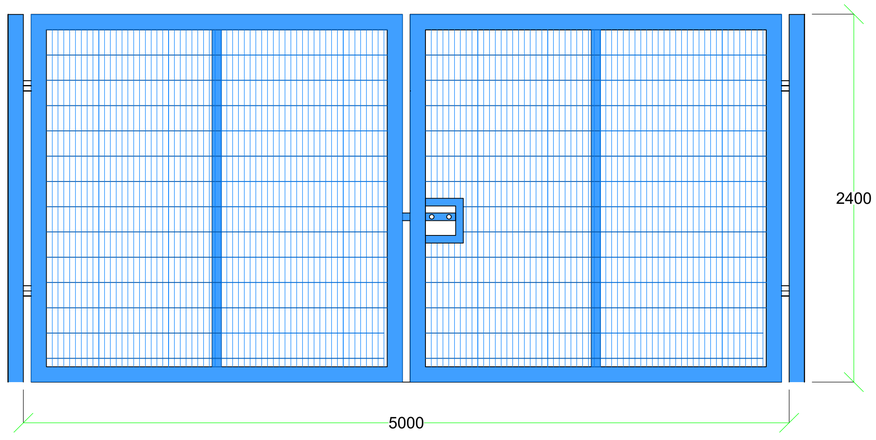

NEW FENCING - SPECIFICATION

Main Contractor to allow to install new CLD 'Securus Lite' fencing of 2330mm (H) x 2929mm (W) panels with welded mesh of 5mm dia. Posts to be rectangle hollow section with anti-tamper connectors, galvanized.
Post dimensions subject to height of fence and to be confirmed by contractor, set at maximum 2940mm centres with over length set in suitable concrete bedding as per manufacturer's instructions.
Fencing and posts to be powder-coated colour RAL 5015 SKY BLUE
See appendix C for specification Note: Panels may be cut to length using a hacksaw or angle grinder, but care must be taken to ensure ends are kept the same length and square to provide a neat finish. Any cut ends must be painted with zinc rich paint with suitable touch up paint if panels are coated. No sharp / unsafe or uneven panels will be accepted.

Note: Contractors to verify colour on site before placing orders to closely match existing fence colours.

Note: Panels may be cut to length using a hacksaw or angle grinder, but care must be taken to ensure ends are kept the same length and square to provide a neat finish. Any cut ends must be painted with zinc rich paint with suitable touch up paint if panels are coated. No sharp / unsafe or uneven panels will be accepted.

GATES
Refer to proposed drawings
Gates to be manufactured to suit the CLD Secures Lite system and to match panel style, height and finish.
Single and double leaf swing gates to be fabricated from galvanised steel frames with welded rigid mesh infill panels.
Allow for:
Fully adjustable hinges
Locking arrangements appropriate to gate size and location
Ground sockets / drop bolts for double leaf gates
All necessary brackets, fittings and fixings in accordance with CLD Fencing Systems specifications

NOTE: Posts should be positioned appropriately in relation to existing vegetation and trees that are to remain. The spacing between posts may need to be adjusted to accommodate trees and their roots.

ASSOCIATED WORKS

Main contractor to allow for the following associated works:
Tree Works: Existing trees / hedge to have overhanging branches neatly trimmed to accommodate the installation of a new 2.4m high fence
Waste Removal: Contractor to refer to drawing 002 and allow for the removal of all rubble and garden waste from the marked area and cart away from site, leaving the area clear and ready for works.
Storage Shed: Contractor to refer to drawing 002 and allow for the dismantle and remove existing garden shed within nursery play area. All waste materials to be carted away and disposed of off site.

Note:
Contractor is to verify all dimensions and levels on site prior to site works commencement. Under no circumstances are any dimensions or levels to be scaled from this drawing number for the purpose of manufacturing components. Contractor to report any discrepancies to the Designer.

REVISION	DESCRIPTION	DATE
--	TENDER	APRIL 26

SCALE		SIGNATURE	DATE
1:50	DRAWN	MC	APRIL 26
ORIGINAL SIZE A1	CHECKED	MB	APRIL 26
	APPROVED	MB	APRIL 26

This drawing is copyright and may not be reproduced or made use of unless expressly agreed by M Bradbury Consulting Ltd

CLIENT

The Board of Governors
St James Primary School
Cromwell Range
Manchester
M14 6HW

PROJECT

Safeguarding Works

Bradbury CONSULTING CHARTERED SURVEYORS
59 Wilmslow Road, Handforth, Cheshire, SK9 3EN
WEB: www.bradbury-consulting.co.uk TEL: 01625 522 209

TITLE

Fencing Specification

JOB NUMBER

2025.088

DRAWING NUMBER

2025.088.004