


PENNINGTON STREET
LEVENSHULME

AMENITYTREE
ENVIRONMENTAL PLANNING CONSULTANTS

KEY

- SITE BOUNDARY
- INTERNAL FOOTPATHS & PATIOS
NATURAL PCC PAVIOURS 600x600mm
- FRONTAGE FOOTPATHS
NATURAL PCC PAVIOURS 600x600mm
- DRIVES
POROUS BITUMEN MACDAM
- ESTATE ROAD
TARMACADAM
- BOUNDARY WALL TREATMENT (1)
EXISTING RAILWAY WALL
SEE DK-A-DWG 1351-106 FOR DETAILS
- BOUNDARY WALL TREATMENT (2)
1.8m HIGH BRICKWORK WALL
SEE DK-A-DWG 1351-106 FOR DETAILS
- BOUNDARY WALL TREATMENT (3)
450mm HIGH BRICKWORK WALL
SEE DK-A-DWG 1351-106 FOR DETAILS
- BOUNDARY WALL TREATMENT (4)
450mm HIGH TIMBER FENCE
SEE DK-A-DWG 1351-106 FOR DETAILS
- BIN STORE
TO ARCHITECT'S DETAILS
- BIKE STORE
TO ARCHITECT'S DETAILS
- EASEMENT AREA
AS PER DK-A SITE PLAN



0 6 12
m

R.04	08.04.26	Amended to suit DK-1351-106F-Proposed Site Plan	AC
R.03	25.05.25	Minor amendments	AC
R.02	23.09.25	Boundary updated	AC
R.01	15.09.25	First Issue	AP
REV.NO.	DD.MM.YY	DESCRIPTION OF REVISION	INITIALS

PREPARED BY

AMENITY TREE


STATUS

FOR COMMENT

TITLE

HARDWORKS & BOUNDARY TREATMENTS

DWG.NO		REV.NO	
AT.25.12095.100		R.04	
SCALE	DRAWN	APPROVED	DATE
1:100 @ A0	AC	SD	08.04.26

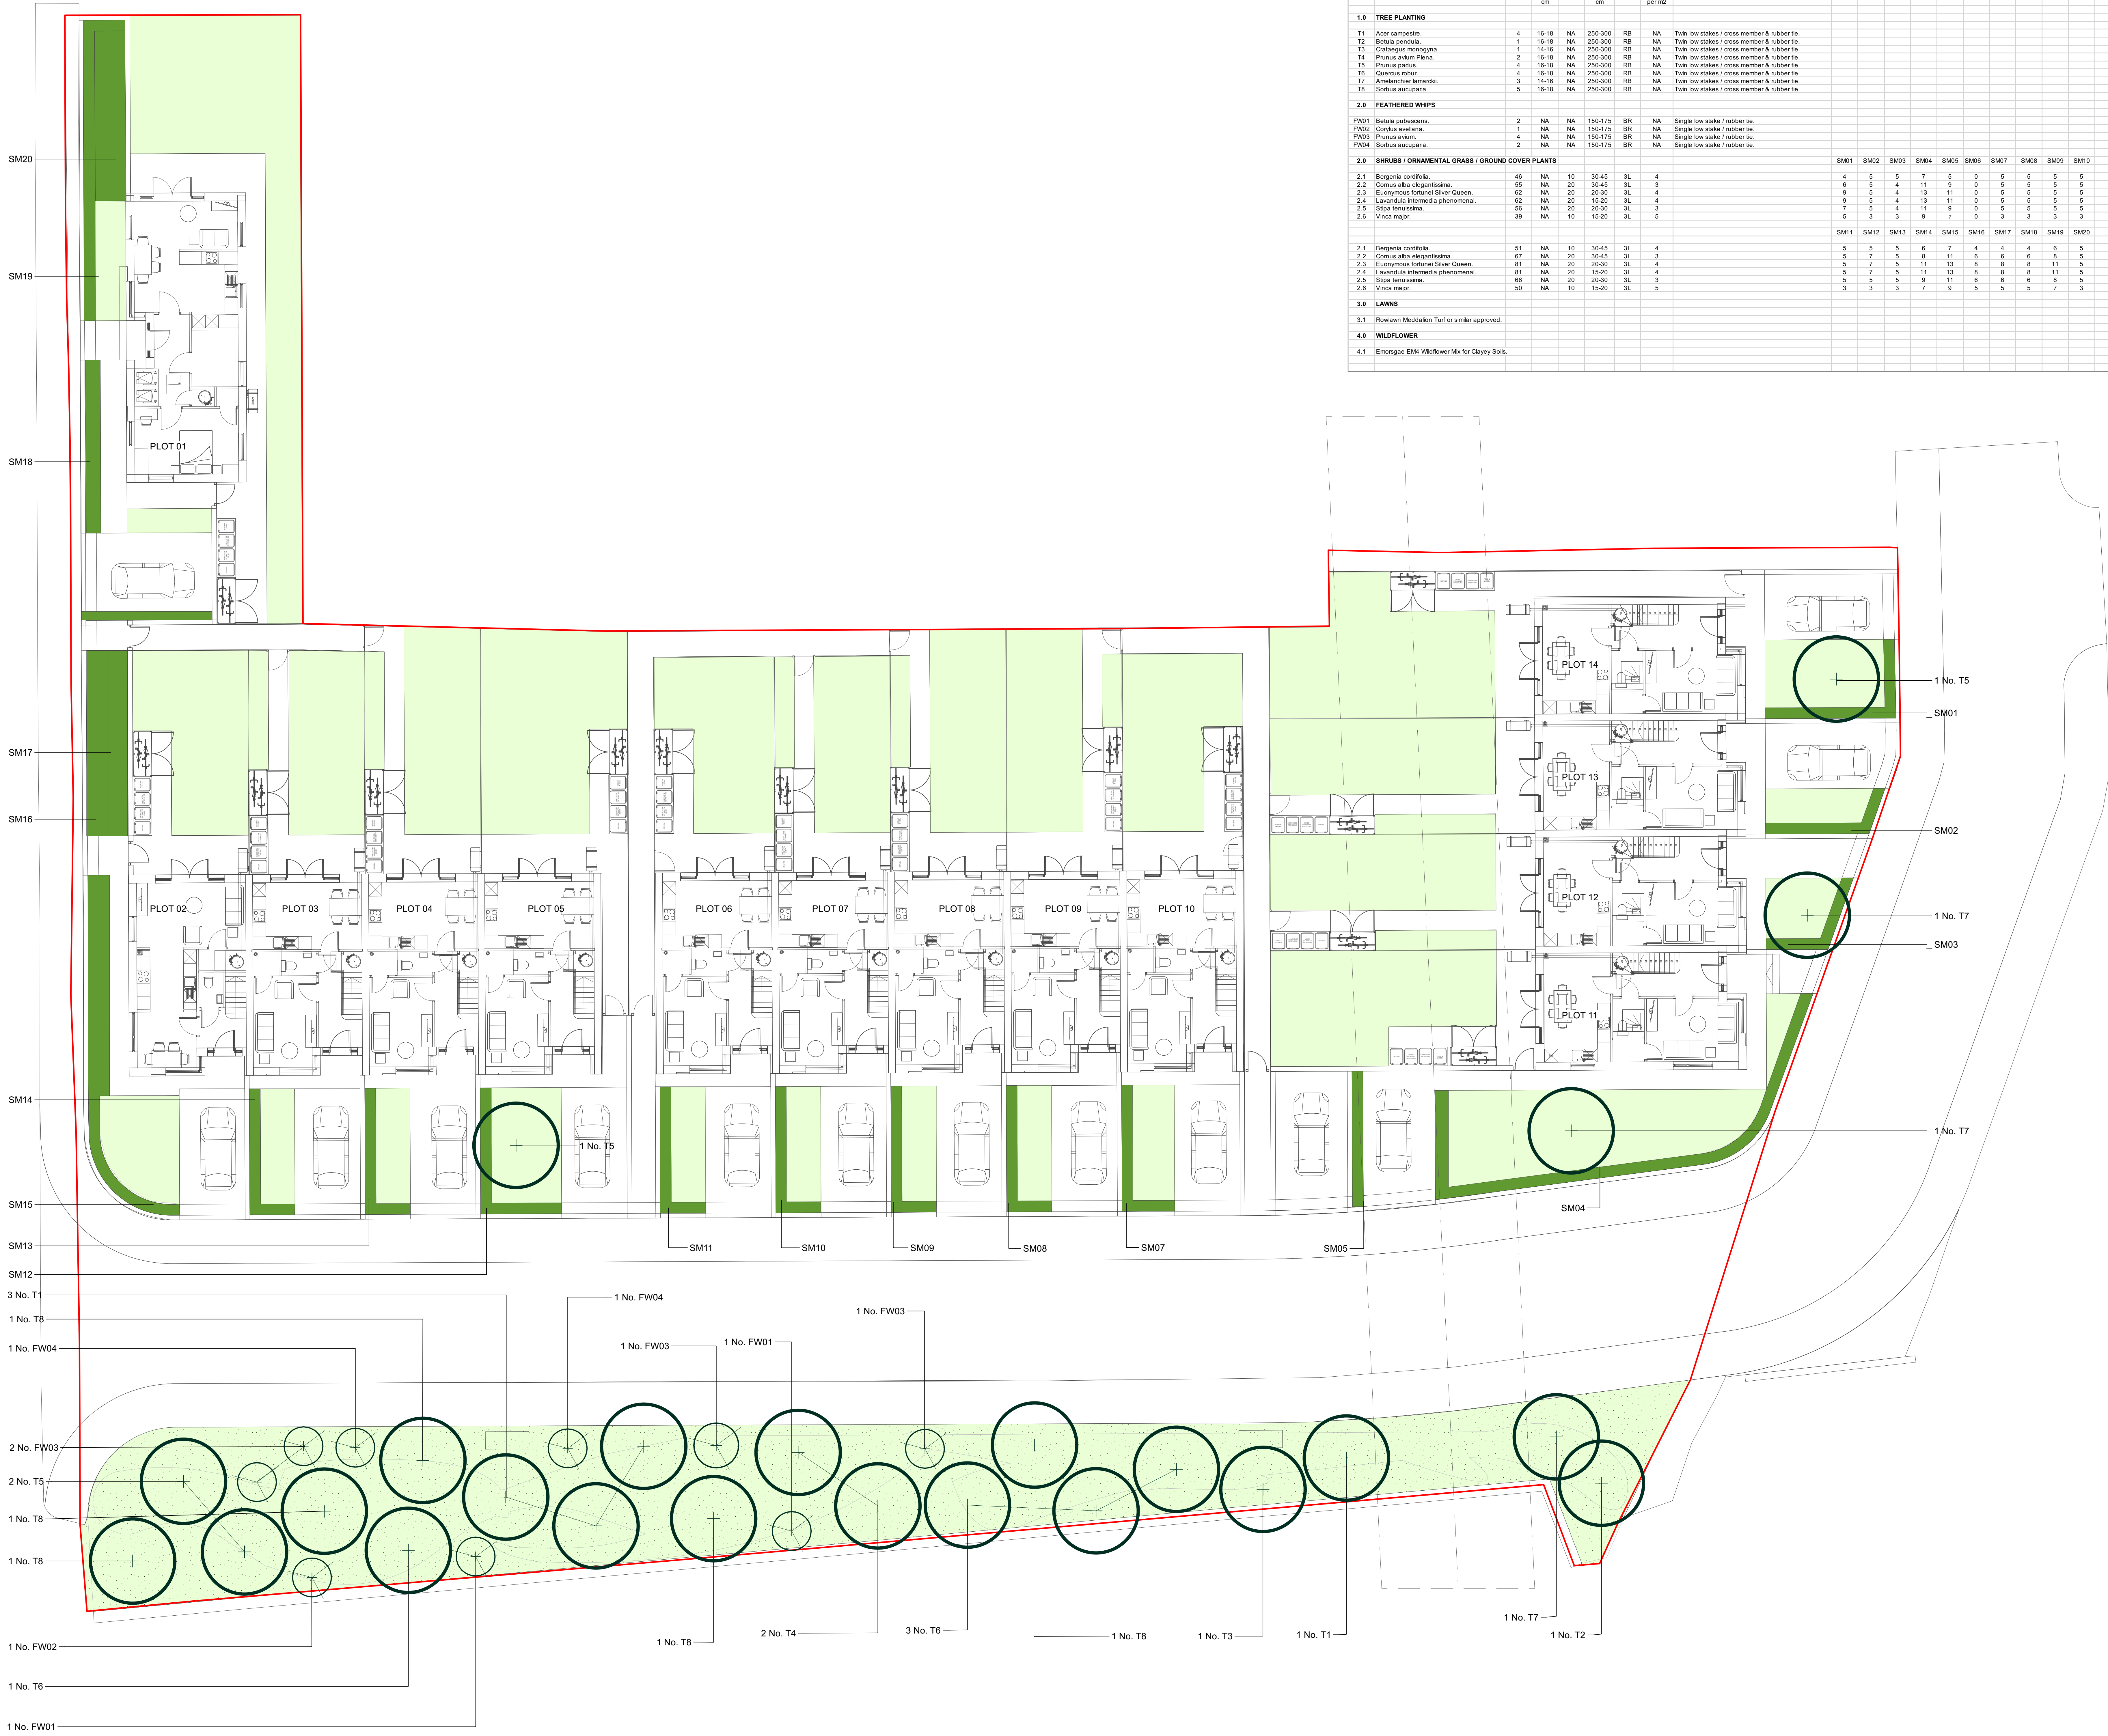

12754_Plant Schedule_v2

REF.	TREE PLANTING	NO.	GIRTH cm	%	HEIGHT cm	TYPE	DENSITY per m2	NOTES	SM01	SM02	SM03	SM04	SM05	SM06	SM07	SM08	SM09	SM10
1.0 TREE PLANTING																		
T1	Acer campestre	4	16-18	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
T2	Betula pendula	1	16-18	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
T3	Cotoneaster horizontalis	1	14-16	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
T4	Prunus avium Plena	2	16-18	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
T5	Prunus padus	4	16-18	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
T6	Quercus robur	4	16-18	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
T7	Ametanther lamarckii	3	14-16	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
T8	Sorbus aucuparia	5	16-18	NA	250-300	RB	NA	Twin low stakes / cross member & rubber tie										
2.0 FEATHERED WHIPS																		
FW01	Betula pubescens	2	NA	NA	150-175	BR	NA	Single low stake / rubber tie										
FW02	Corylus avellana	1	NA	NA	150-175	BR	NA	Single low stake / rubber tie										
FW03	Prunus avium	4	NA	NA	150-175	BR	NA	Single low stake / rubber tie										
FW04	Sorbus aucuparia	2	NA	NA	150-175	BR	NA	Single low stake / rubber tie										
3.0 SHRUBS / ORNAMENTAL GRASS / GROUND COVER PLANTS																		
2.1	Bergenia cordifolia	46	NA	10	30-45	3L	4		4	5	5	7	5	0	5	5	5	5
2.2	Cornus alba elegantissima	55	NA	20	30-45	3L	3		6	5	4	11	9	0	5	5	5	5
2.3	Eucryphia fortunei Silver Queen	62	NA	20	20-30	3L	4		9	5	4	13	11	0	5	5	5	5
2.4	Lavandula stoechas phenomenal	62	NA	20	15-20	3L	4		9	5	4	13	11	0	5	5	5	5
2.5	Stipa tenuissima	56	NA	20	20-30	3L	3		7	5	4	11	9	0	5	5	5	5
2.6	Vicia major	39	NA	10	15-20	3L	5		5	3	3	9	7	0	3	3	3	3
2.1	Bergenia cordifolia	51	NA	10	30-45	3L	4		5	5	5	6	7	4	4	4	6	5
2.2	Cornus alba elegantissima	67	NA	20	30-45	3L	3		5	7	5	8	11	6	6	6	8	5
2.3	Eucryphia fortunei Silver Queen	81	NA	20	20-30	3L	4		5	7	5	11	13	8	8	8	11	5
2.4	Lavandula stoechas phenomenal	81	NA	20	15-20	3L	4		5	7	5	11	13	8	8	8	11	5
2.5	Stipa tenuissima	66	NA	20	20-30	3L	3		5	5	5	9	11	6	6	6	8	5
2.6	Vicia major	50	NA	10	15-20	3L	5		3	3	3	7	9	5	5	5	7	3
3.0 LAWNS																		
L1	Rowlaw Meddalon Turf or similar approved.																	
4.0 WILDFLOWER																		
4.1	Emergase EM4 Wildflower Mix for Clayey Soils																	

PENNINGTON STREET
LEVENSHULME


AMENITYTREE
ENVIRONMENTAL PLANNING CONSULTANTS

KEY

- TREE PLANTING
SEE PLANTING SCHEDULE FOR DETAILS
- FEATHERED WHIPS
SEE PLANTING SCHEDULE FOR DETAILS
- SHRUB / ORNAMENTAL GRASSES
SEE PLANTING SCHEDULE FOR DETAILS
- AMENITY LAWNS
SEE PLANTING SCHEDULE FOR DETAILS
- WILDFLOWER AREAS
SEE PLANTING SCHEDULE FOR DETAILS
- EASEMENT AREA
AS PER DK-A SITE PLAN

PLANTING NOTES

- 01 - All planting shall be in accordance with BS.4428. 1989 S7.
- 02 - Trees shall conform to BS.3596-1. 1992.
- 03 - Tree pits shall be 1200x1200x750mm.
- 04 - Multi stem pits shall be 1000x1000x600mm.
- 05 - Backfill material 70% certified sandy loam / 30% Approved tree compost (by volume).
- 06 - No peat products permitted.
- 07 - Staking as indicated in plant schedules.
- 08 - Install GreenTech Mono watering systems to trees.
- 09 - Shrub / Hedge planting - 400mm depth of free draining topsoil to BS.3882.
- 10 - Lawns - 150 mm depth of free draining topsoil to BS.3882.
- 11 - Wildflower - Onto clean unimproved free draining subsoil to BS.8601. Or approved Low nutrient soil.

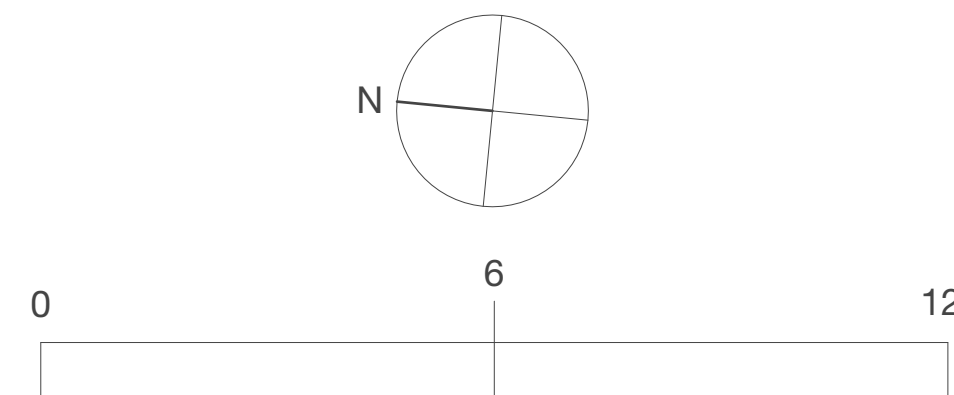

R.04	08.04.26	Amended to suit DK-1351-100F-Proposed Site Plan	AC
R.03	25.05.25	Minor amendments	AC
R.02	23.09.25	Boundary updated	AC
R.01	15.09.25	First Issue	AP
REV.NO.	DD.MM.YY	DESCRIPTION OF REVISION	INITIALS

PREPARED BY

AMENITY TREE

STATUS

FOR COMMENT

TITLE

SOFTWARES & PLANTING

DWG.NO

AT.25.12095.101

REV.NO

R.04

SCALE

1:100 @ A0

DRAWN

AC

APPROVED

SD

DATE

08.04.26