
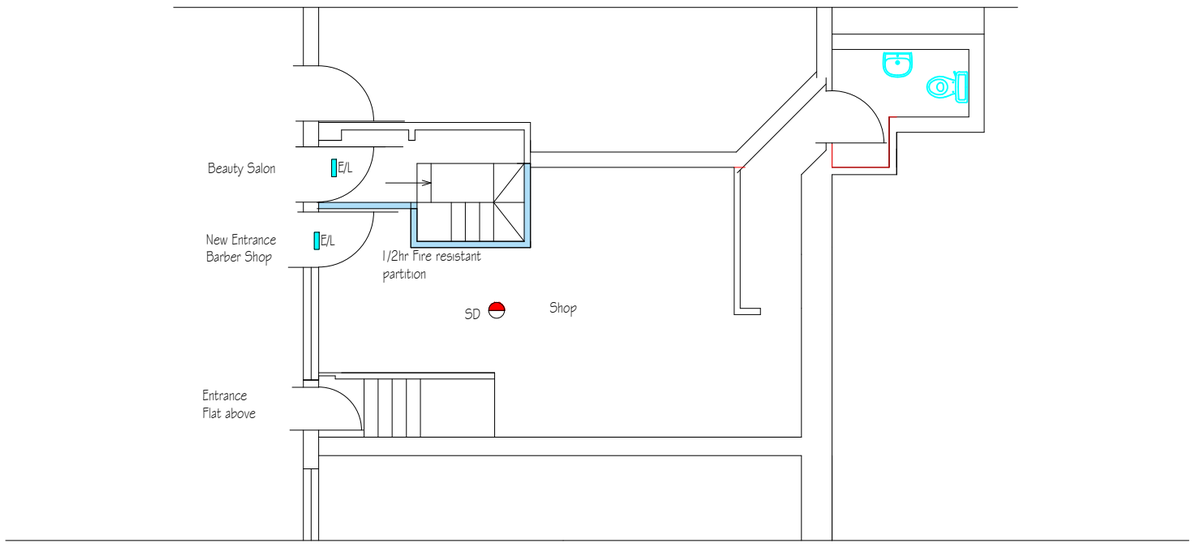


Ground Floor Plan

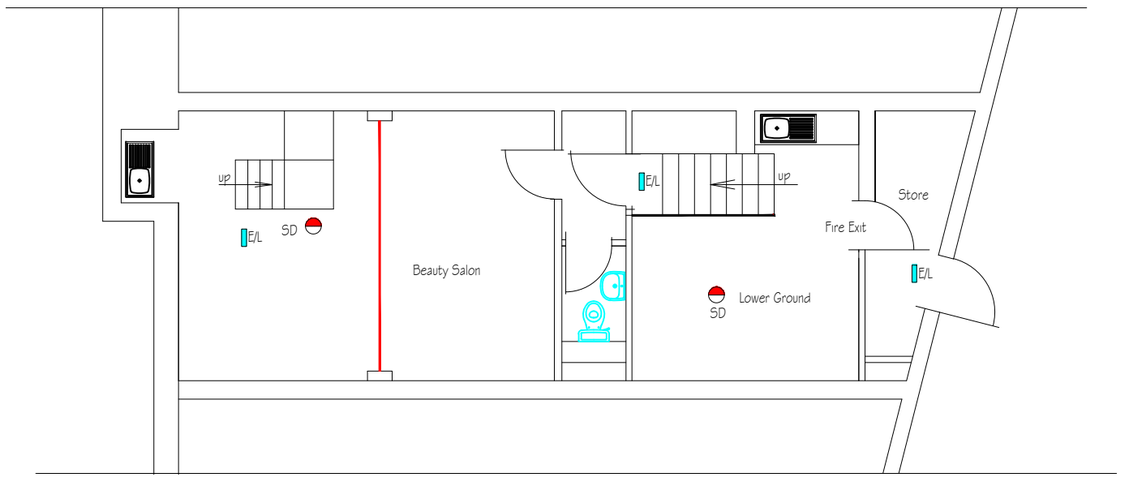

KEY

SD - Smoke detector
HD - Heat detector
EL - Emergency light
FD - ½ hour fire door

Basement Plan

The builder must check the site and the approved drawings before commencing the works and must take any working measurements as necessary.Any discrepancy in the drawing must be reported to the client .

Escape route in the basement to be constructed with timber partition using studs 75x50mm studs @400mm c/c include 18mm ply wood boards with 12mm fire line plaster board and skim finished.

New ½hr fire door & Fire door frame to be installed to the basement .

New fire line plaster and skim finish to be provided above the opening over the existing stair leading to the 1st floor.

New Smoke detector to be provided to above the Ground floor and basement . New smoke detector to be linked into the existing fire detection system.

All of the Electrical works to be in compliance with the Building Regulations Electrician confirming that electrical installation work meets BS 7671 safety standards.

New Fire detection / Alarm system to be in accordance with the recommendations of BS 5839-6:2004 to at least a Grade A Category A LD 2 standard with detectors sited in accordance with the recommendations of BS 5839 for category L2 system.

The Electrician must install a new consumer unit or fuse box for the installation of a complete new circuit – for example a ring or lighting circuit, or a new circuit for a shower or immersion heater Alterations to existing circuits – such as adding an extra power point or lighting point , including a new sub meter to the ground floor unit.

		REVISION	initial
no.	date	description	
A .	5.8.26	Planning	

HSH
Engineering Design Services Ltd
428 Cheetham Hill Road Cheetham Manchester
M8 9LE. UK 01617956385,07940197333

project title	Proposed subdivision of the ground floor to use as a barbers shop.
client	Mrs Sahenaz Zeria
dwg. title	Proposed Ground & Basement Plan

dwg.no.	sheet no.	scale.	job no.
04A		1:100.	

428 Cheetham Hill Roaad
Cheetham Manchester M8 9LE

drawn by.	checked by.	approved by.	date
TZ		-	Sept 09