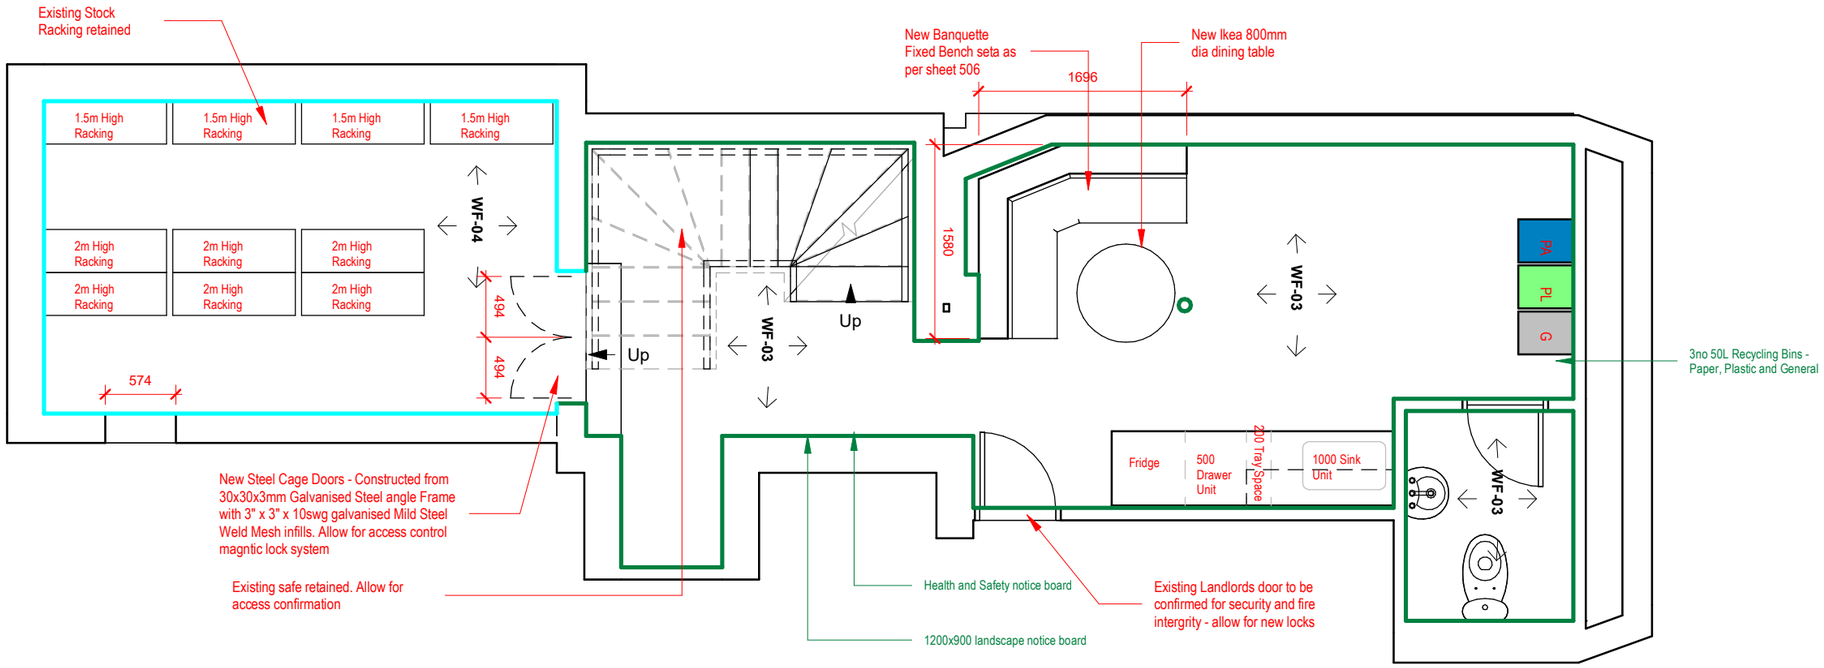


Code	Description	Key
WF-01	Wipe Clean Durable Paint Finish to Match F&B Loa's White - Eggshell	
WF-02	Feature Wall Panelling	
WF-03	Wipe Clean Durable Paint Finish to Match Bright White - Eggshell	
WF-04	Wall Finish to remain as existing	

Partitions Key

NEW PARTITIONS TO CONSIST OF 1NO. LAYERS OF 15MM KNAUF IMPACT PLASTERBOARD ON 12MM PLYWOOD FIXED TO **BOTH FACES** OF 70MM I STUD FIXED WITH BASE AND HEAD TRACK TO STRUCTURAL FLOOR AND SOFFIT, MAXIMUM 450MM CENTRES BOTH VERTICALLY AND HORIZONTALLY. PLASTERBOARD TO BE SCREW FIXED AT MAX. 200MM CENTRES WITH JOINTS STAGGERED, INSTALLED AS PER MANUFACTURERS WRITTEN INSTRUCTION AND SPECIFICATION. TAPER EDGE PLASTERBOARD, SCREWFIXED, WITH ALL JOINTS TAPED, FILLED AND FINISHED SMOOTH READY FOR DECORATION; THE SYSTEM TO BE INSTALLED PLUMB, TRUE AND SECURELY FIXED WITH PERIMETER ACOUSTIC SEALANT AND ADDITIONAL STUDS PROVIDED AT OPENINGS OR WHERE REQUIRED FOR SUPPORT.

NEW PARTITIONS TO CONSIST OF 1NO. LAYERS OF 15MM KNAUF IMPACT PLASTERBOARD ON 12MM PLYWOOD FIXED TO **THE SHOP SIDE FACE** OF 70MM I STUD FIXED WITH BASE AND HEAD TRACK TO STRUCTURAL FLOOR AND SOFFIT, MAXIMUM 450MM CENTRES BOTH VERTICALLY AND HORIZONTALLY. PLASTERBOARD TO BE SCREW FIXED AT MAX. 200MM CENTRES WITH JOINTS STAGGERED, INSTALLED AS PER MANUFACTURERS WRITTEN INSTRUCTION AND SPECIFICATION. TAPER EDGE PLASTERBOARD, SCREWFIXED, WITH ALL JOINTS TAPED, FILLED AND FINISHED SMOOTH READY FOR DECORATION; THE SYSTEM TO BE INSTALLED PLUMB, TRUE AND SECURELY FIXED WITH PERIMETER ACOUSTIC SEALANT AND ADDITIONAL STUDS PROVIDED AT OPENINGS OR WHERE REQUIRED FOR SUPPORT.

No.	Description	Date