


(62) Room 01-039 North Section 1

1 : 50

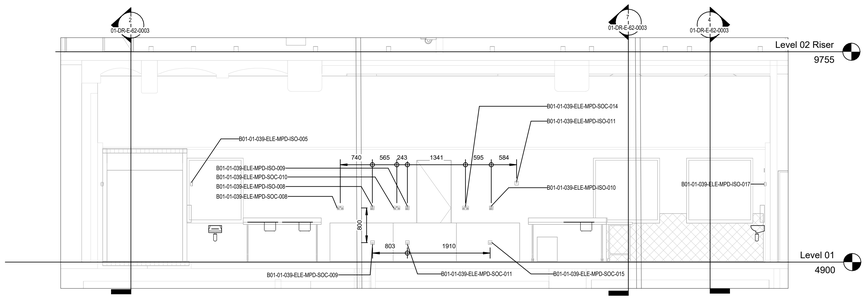

(62) Room 01-039 East Section 1

1 : 50

HK-N-60-General Notes


1. THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT PROJECT DRAWINGS AND INFORMATION FROM THE WHOLE PROJECT TEAM AS AVAILABLE ON ACONEX. THIS IS INCLUSIVE OF, BUT NOT LIMITED TO, ALL AVAILABLE 3D REVIT MODEL INFORMATION FROM HULLEY & KIRKWOOD, TAYLOR DESIGN, PURCELL, RAMBOLL AND ARUP.
2. ALL ELECTRICAL INSTALLATION WORKS SHALL BE INSTALLED IN ACCORDANCE WITH BS 7671 INCLUDING ALL AMENDMENTS.
3. CONTRACTORS SHALL INCLUDE FOR DISJOINTED WORKS INVOLVED WITH THE PROJECT IN REGARDS TO THE CO-ORDINATION WITH ALL OTHER TRADES.
4. THE ELECTRICAL INSTALLATION SHALL BE IN ACCORDANCE WITH THE CONTRACTORS PROGRAMME OF WORKS AND PHASING STRATEGY.
5. FINAL POSITIONS OF ALL EQUIPMENT SHALL BE AS PER THE SETTING OUT IN ACCORDANCE WITH THE ARCHITECTURAL INFORMATION.
6. THE CONTRACTOR SHALL UNDERTAKE ALL WORKS IN ACCORDANCE WITH THE ARUP PROJECT SPECIFICATION(S). IF NOT PROVIDED AT THE TIME OF TENDER, THE CONTRACTOR SHALL REQUEST SAID DOCUMENT(S) AND ENSURE THEIR TENDER COMPLIES FULLY WITH THE OUTLINED REQUIREMENTS.

HK-N-62-General Notes

1. THE CONTRACTOR SHALL ENSURE HIGH INTEGRITY EARTHING IS PROVIDED VIA DUAL EARTH CONNECTIONS AT THE DISTRIBUTION BOARDS.
2. UNDER NO CIRCUMSTANCES SHALL SERVICES BE INSTALLED ONTO ORIGINAL FABRIC WALLS WITHIN THE INTERNAL STRUCTURE.
3. ALL FLOOR MOUNTED CLEANER SOCKET OUTLETS SHALL BE INSTALLED WITHIN A FLOOR GROMMET COMPLETE WITH LID.
4. ALL DISTRIBUTION BOARDS ARE TO BE SUPPLIED AS PART OF THE BASE BUILD. CONTRACTORS SHALL REFER TO ARUP SMALL POWER DRAWINGS FOR LOCATIONS OF DISTRIBUTION BOARDS.


LEGEND

- 13A TWIN SWITCHED SOCKET OUTLET
  'IP' DENOTES IP66 RATED
- 13A SWITCHED FUSED CONNECTION OUTLET UNLESS STATED OTHERWISE
  'HD' DENOTES HAND DRYER.
  'DP' DENOTES DOUBLE POLE UNFUSED ISOLATOR
- 13A SWITCHED SINGLE SOCKET
  'CL' DENOTES CLEANERS SOCKET
- 13A SWITCHED 4 SINGLE SOCKET METALCLAD SUSPENDED SERVICE UNIT AS MANUFACTURED BY OLSON
- 13A UNSWITCHED SINGLE SOCKET OUTLET
- 1No COMMANDO SOCKET 32A SP&N
- FB — FLOOR BOX - 2No TWIN SWITCHED SOCKETS
- ROTARY ISOLATOR (SIZED AS INDICATED)
- SINGLE RJ45 OUTLET
- DOUBLE RJ45 OUTLET

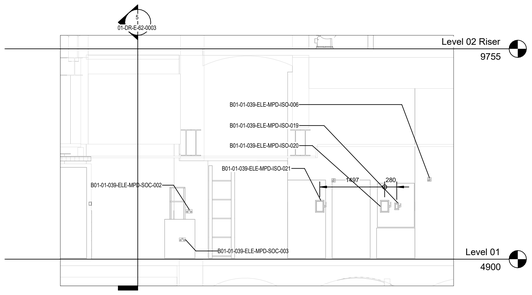


(62) Room 01-039 North Section 2

1 : 50

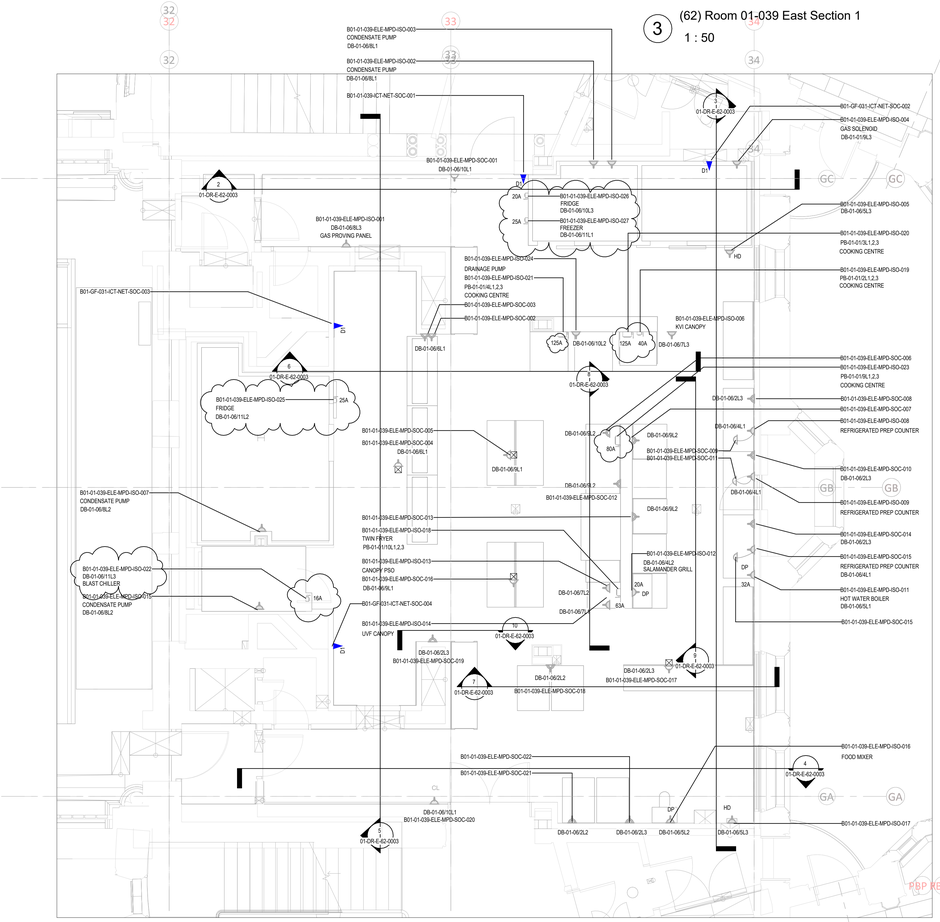


(62) Room 01-039

1 : 50

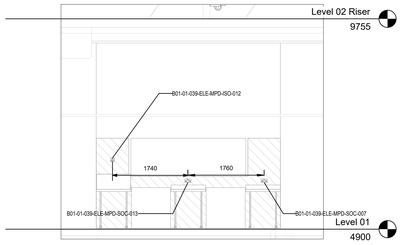


(62) Room 01-039 West Section 2

1 : 50

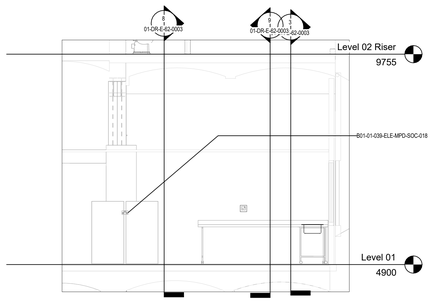

(62) Room 01-039 North Section 3

1 : 50




(62) Room 01-039 West Section 3

1 : 50


04/06/2024	DB SCHEDULE UPDATE	C02	S Main
07/11/2023	ISSUED FOR CONSTRUCTION	C01	S Main
02/08/2021	UPDATED IN LINE WITH CLASH REPORTS & COMMENTS	P03	J Staley
20/04/2021	ISSUED FOR TENDER	P02	J Staley
29/10/2020	ISSUED FOR WORK STAGE 5	P01	J Staley
Date	Revision Description	Rev.	By

Revision Description

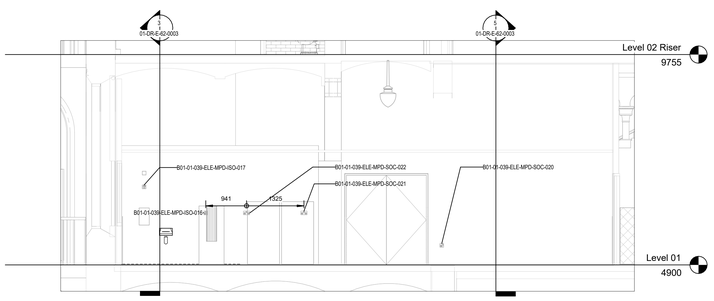


(62) Room 01-039 South Section

1 : 50

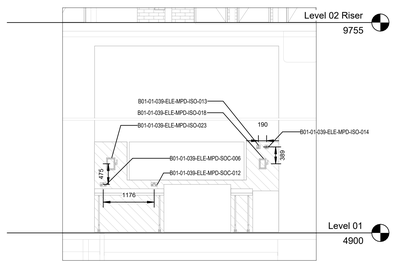

(62) Room 01-039 East Section 2

1 : 50

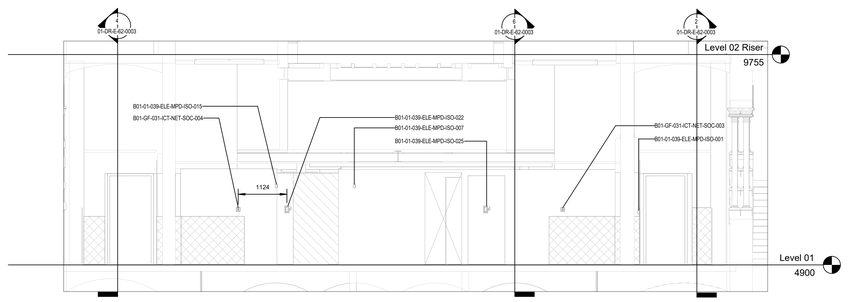

(62) Room 01-039 West Section 1

1 : 50

Manchester Office

2 Commercial Street
Castlefield
Manchester
M15 4RQ

T: 0161 832 2030
E: hk.manchester@hulley.co.uk

hulley & kirkwood consulting engineers

...Making Buildings Work

Project:
Manchester Town Hall Catering Works

Drawing Title:
SMALL POWER & DATA LAYOUT LEVEL 01 Sheet 3 of 3

Drawing Number:
OTH-HAK-TH-01-DWG-V-6203

Revision:	C02	**Rev Date:**	04/06/2024
Scale:	1 : 50		
Drawn By:	J Staley	**Checked By:**	D Farrimond
		Approved By:	D Farrimond
Arch Rev:	-		
Struct Rev:	-		

Issue Status:
CONSTRUCTION

A0