




1 (63) Room 01-039
1 : 50

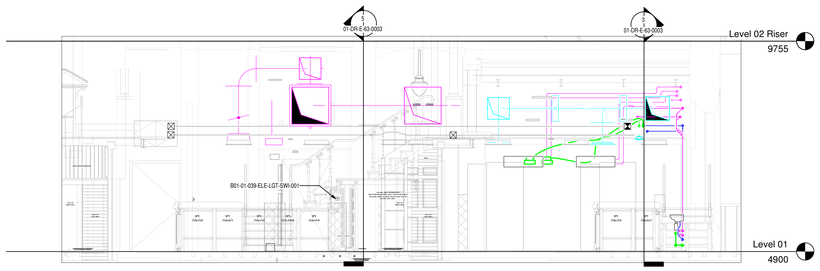


2 Room 01-039 North Section
1 : 50

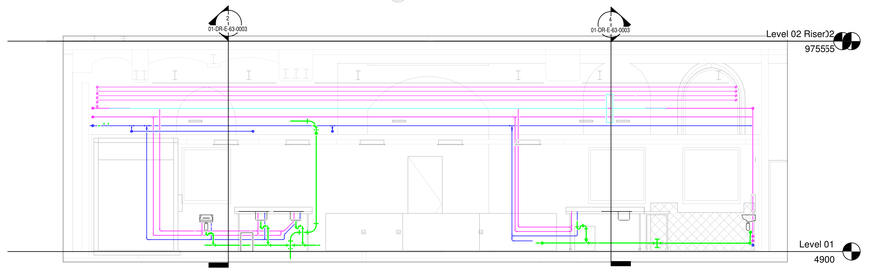

3 (63) Room 01-039 East Section
1 : 50

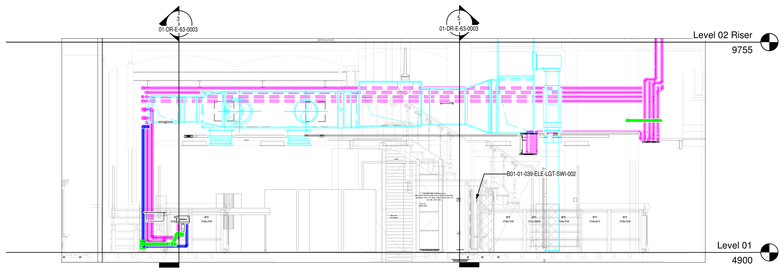

4 (63) Room 01-039 South Section
1 : 50

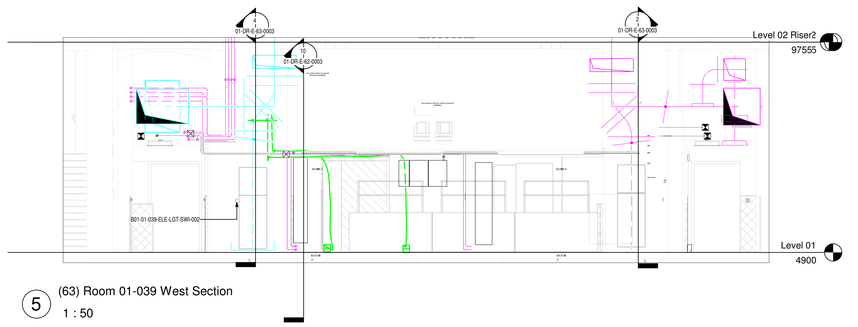

5 (63) Room 01-039 West Section
1 : 50

HK-N-60-General Notes

1 THIS DRAWING SHALL BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT PROJECT DRAWINGS AND INFORMATION FROM THE WHOLE PROJECT TEAM AS AVAILABLE ON ACONEX. THIS IS INCLUSIVE OF, BUT NOT LIMITED TO, ALL AVAILABLE 3D REVIT MODEL INFORMATION FROM HULLEY & KIRKWOOD, TAYLOR DESIGN, PURCELL, RAMBOLL AND ARUP.
2 ALL ELECTRICAL INSTALLATION WORKS SHALL BE INSTALLED IN ACCORDANCE WITH BS 7671 INCLUDING ALL AMENDMENTS.
3 CONTRACTORS SHALL INCLUDE FOR DISJOINTED WORKS INVOLVED WITH THE PROJECT IN REGARDS TO THE CO-ORDINATION WITH ALL OTHER TRADES.
4 THE ELECTRICAL INSTALLATION SHALL BE IN ACCORDANCE WITH THE CONTRACTORS PROGRAMME OF WORKS AND PHASING STRATEGY.
5 FINAL POSITIONS OF ALL EQUIPMENT SHALL BE AS PER THE SETTING OUT IN ACCORDANCE WITH THE ARCHITECTURAL INFORMATION.
6 THE CONTRACTOR SHALL UNDERTAKE ALL WORKS IN ACCORDANCE WITH THE ARUP PROJECT SPECIFICATION(S). IF NOT PROVIDED AT THE TIME OF TENDER, THE CONTRACTOR SHALL REQUEST SAID DOCUMENT(S) AND ENSURE THEIR TENDER COMPLIES FULLY WITH THE OUTLINED REQUIREMENTS.

HK-N-63-General Notes

1 SUFFIX 'E' ON DRAWING DENOTES THAT THE FITTING IS COMPLETE WITH 3 HOUR DURATION INTEGRAL BATTERY PACK, INVERTER AND LED INDICATOR TO MEET THE REQUIREMENTS OF BS 5266
2 FOR EMERGENCY EXIT SINAGE REFER TO ARUP LIGHTING DRAWINGS
3 ALL LUMINAIRES UTILISED SHALL BE SUITABLE FOR CATERING AREAS.
4 ALL ASSOCIATED EMERGENCY LIGHTING SHALL BE PROVIDED BY OTHERS AS AGREED WITH THE CLIENT TEAM.

LEGEND

A — WHITECROFT LIGHTING - ACL INDUSTRY
CEILING MOUNTED 1262mm LINEAR LED LUMINAIRE 25.4W, 3970lm, 4000K IP66.
MANUFACTURERS REFERENCE: ACH34K

B1 — WHITECROFT LIGHTING - HYGIENE LED
600 x 600 MODULAR RECESSED LED LUMINAIRE, 38W, 4101lm, 4000K IP54.
MANUFACTURERS REFERENCE: HYLKH34K

B2 — WHITECROFT LIGHTING - HYGIENE LED
600 x 600 MODULAR RECESSED LED LUMINAIRE, 29W, 3350lm, 4000K IP54.
MANUFACTURERS REFERENCE: HYLKH34K

1 WAY LIGHT SWITCH
(GANGED AS INDICATED)

2 WAY GANG LIGHT SWITCH
(GANGED AS INDICATED)

PASSIVE INFA-RED PRESENCE DETECTOR

Date	Revision Description	Rev.	By
03/09/2025	LIGHTING CHANGED TO SUIT CEILING GRID	C02	RV
07/11/2023	ISSUED FOR CONSTRUCTION	C01	S Miah
02/08/2021	UPDATED IN LINE WITH CLASH REPORTS & COMMENTS	P03	J Staley
20/04/2021	ISSUED FOR TENDER	P02	J Staley
29/10/2020	ISSUED FOR WORK STAGE 5	P01	J Staley

Revision Description

hulley & kirkwood consulting engineers

Manchester Office
2 Commercial Street
Castlefield
Manchester
M15 4RQ

T: 0161 832 2030
E: hk.manchester@hulley.co.uk

...Making Buildings Work

Project:
Manchester Town Hall Catering Works

Drawing Title:
LIGHTING LAYOUT LEVEL 01 Sheet 3 of 3

Drawing Number:
OTH-HAK-TH-01-DWG-V-6303

Revision:	C02	**Rev Date:**	03/09/2025
Scale:	1 : 50		
Drawn By:	J Staley	**Checked By:**	D Farrimond
		Approved By:	D Farrimond
Arch Rev:	-		
Struct Rev:	-		

Issue Status:
CONSTRUCTION

A0