SIGNS EXPRESS®
MANCHESTER

ARTWORK PROOF

Client Notice: Whilst we have taken every care and consideration to produce your artwork, it is the customers final responsibility to please check all the elements before retuning an email APPROVAL to proceed. Please check through each artwork page carefully including spelling, all the sizes and dimensions applied and any colours that have been utilised. Please note Signs Express cannot guarantee 100% accurate colours when printing unless Pantone references are supplied.

Signs Express Manchester cannot be held responsible for any artwork errors once the job has been approved to proceed to our production department for manufacturing.

This drawing is the property of Signs Express and can only be used with our consent. Any unauthorised use of these designs will result in a £90 + VAT artwork charge.
Whilst every effort is made to match your corporate colour scheme, if you are in any doubt about the colour matching please request to view our colour samples.

Artwork prepared by: Signs Express (Manchester), Unit 43 Stretford Motorway Estate, Barton Dock Rd, Trafford Park, Manchester M32 0ZH www.signsexpress.co.uk

ARTWORK PROOF

Client: Kings Church
File Name: DOOR SIGNS1331 450mm 90mm 1331
Date: 24.08.2026

Job No: 1331
Designer: Hannah Gallagher
Version: 01


PROJECTING SIGN:
To supply 2 off Double sided flat cut 2.5mm aluminium projecting sign 800mm x 800mm coated one std RALcolour, To have fabricated mild steel projecting 'U' channel arm with an opal makrolon baffle illuminated feature (LEDsare to be cool white) and wall plate, with a folded shroud to suit all coated one std RALcolour:

PLEASE NOTE
- Aluminiumpanel is to be welded to an aluminium channel for mounting to the projecting arm
- The wash of illumination provided by the LEDswill only cover approx 100mm

RAL5003 Sapphire

RAL5018 Turquoise



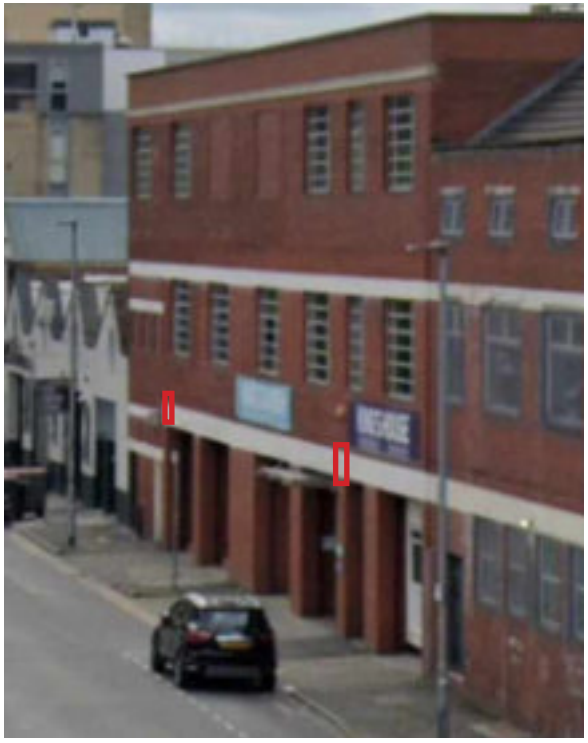

Please note SignsExpresscannot guarantee 100% accurate colours when printing unless Pantone references are supplied.
Printed colours will not match what is on screen exactly, please raise any queries you have regarding colours.

INSTALLATIONAPPROVAL (Each page to be signed/dated by client on site after installation is complete)

Name:	Signature:	Date:

Style of Sign		
Projecting Sign		
Quantity	2	

Substrate	Thickness	Colour
☐ Bubble Board		
☐ Foamex		
☐ Dibond		
☐ Acrylic		
☐ T/Glass		
✓ Other	2.5mm Alu	

Fixings	
✓	DBL Sided Tape

Solid Cut Colours	

Printer Materials	

Lamination	

Profile Cut
☐ Yes ☐ No

Vinyl applied to:
☐ Front ☐ Reverse


Notes

SIGNS EXPRESS MANCHESTER

ARTWORK PROOF

Client:	Kings Church	**Job No:**	1331
File Name:	DOOR SIGNS1331 450mm 90mm 1331	**Designer:**	Hannah Gallagher
Date:	24.08.2026	**Version:**	01


SIGNS EXPRESS MANCHESTER

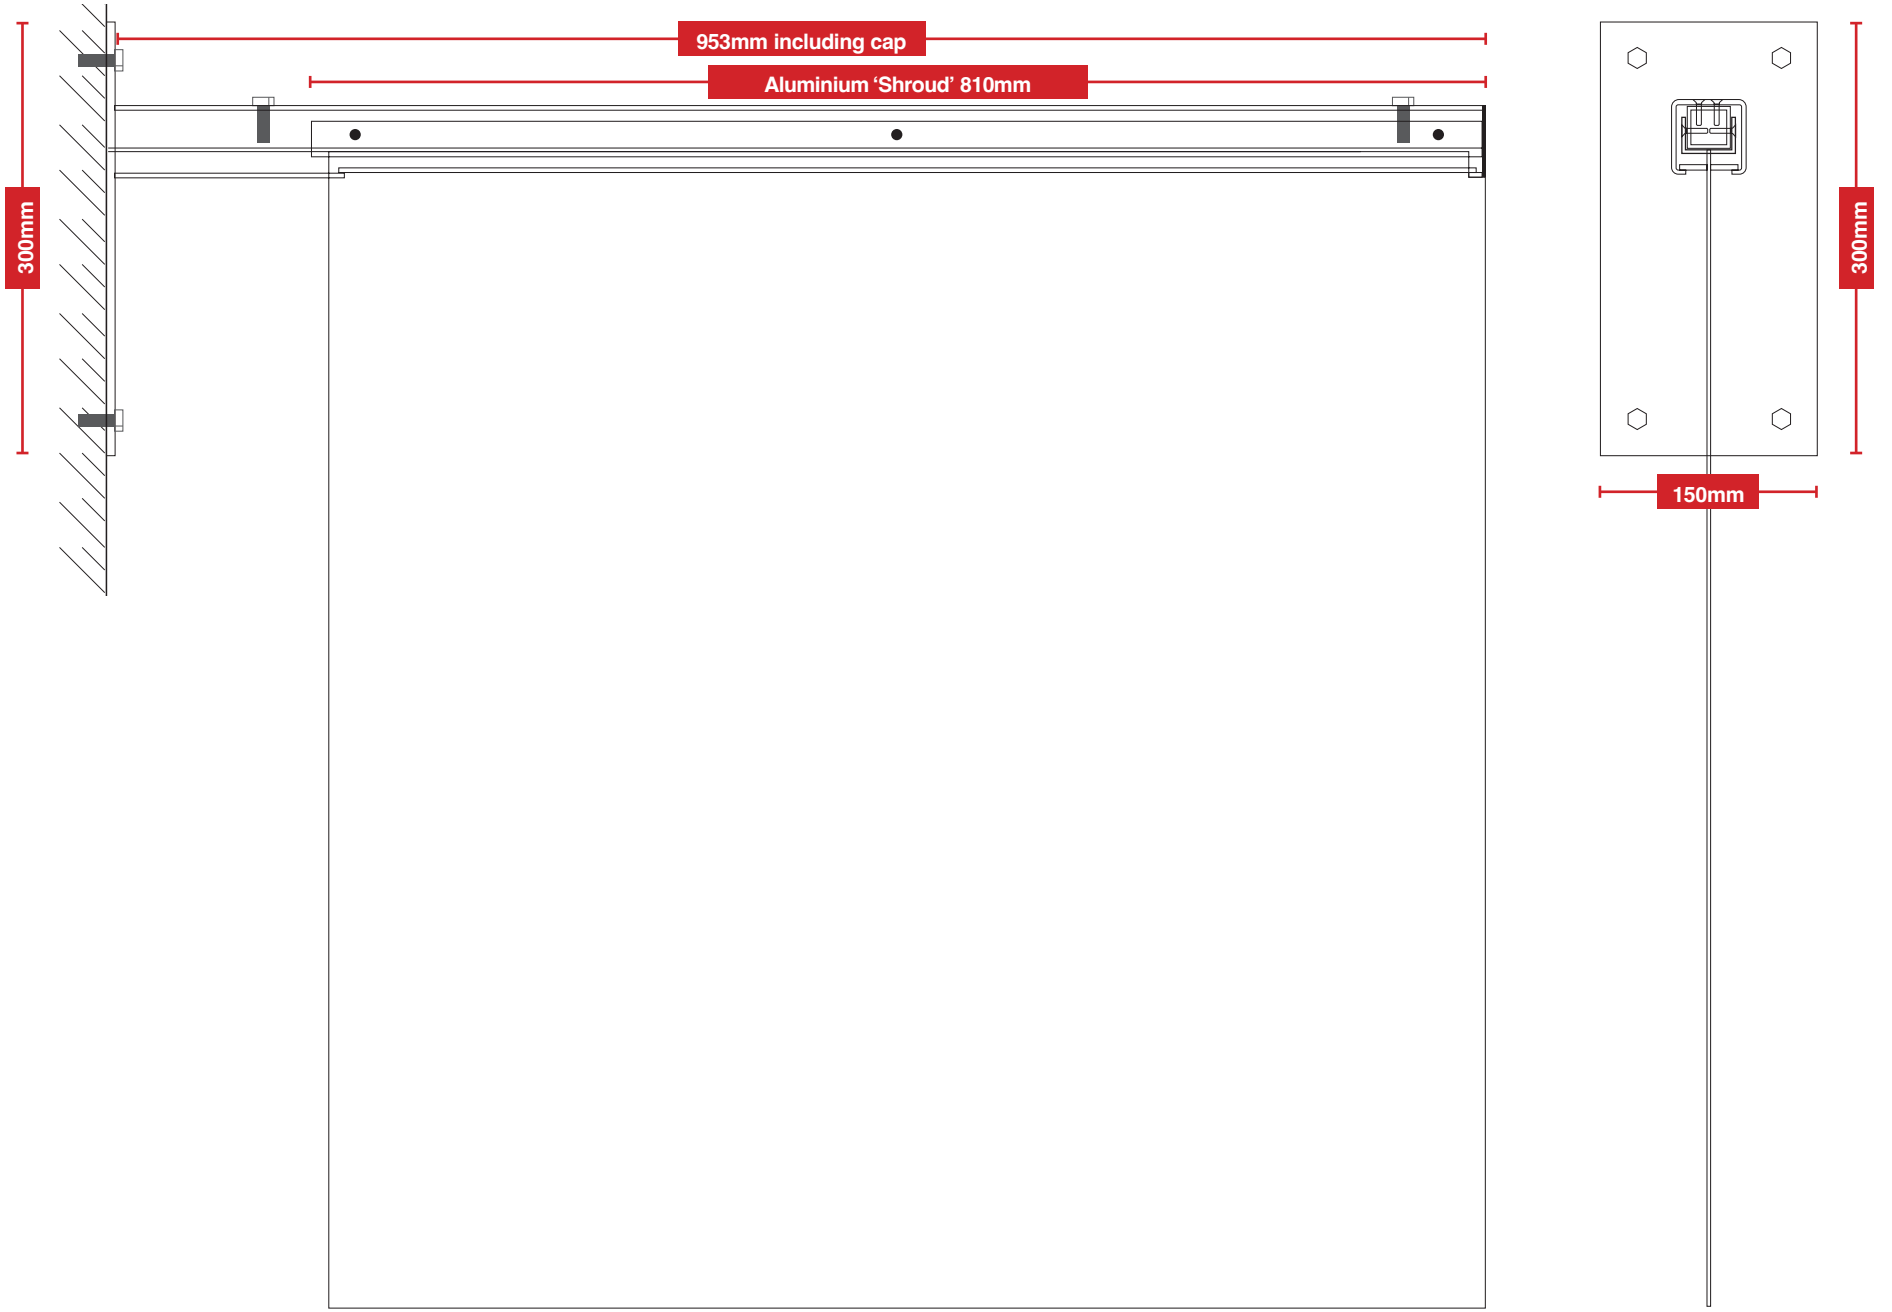

ARTWORK PROOF

Client:	Kings Church
File Name:	DOOR SIGNS1331 450mm 90mm 1331
Date:	24.08.2026
Job No:	1331
Designer:	Hannah Gallagher
Version:	01

SIGNS EXPRESS MANCHESTER

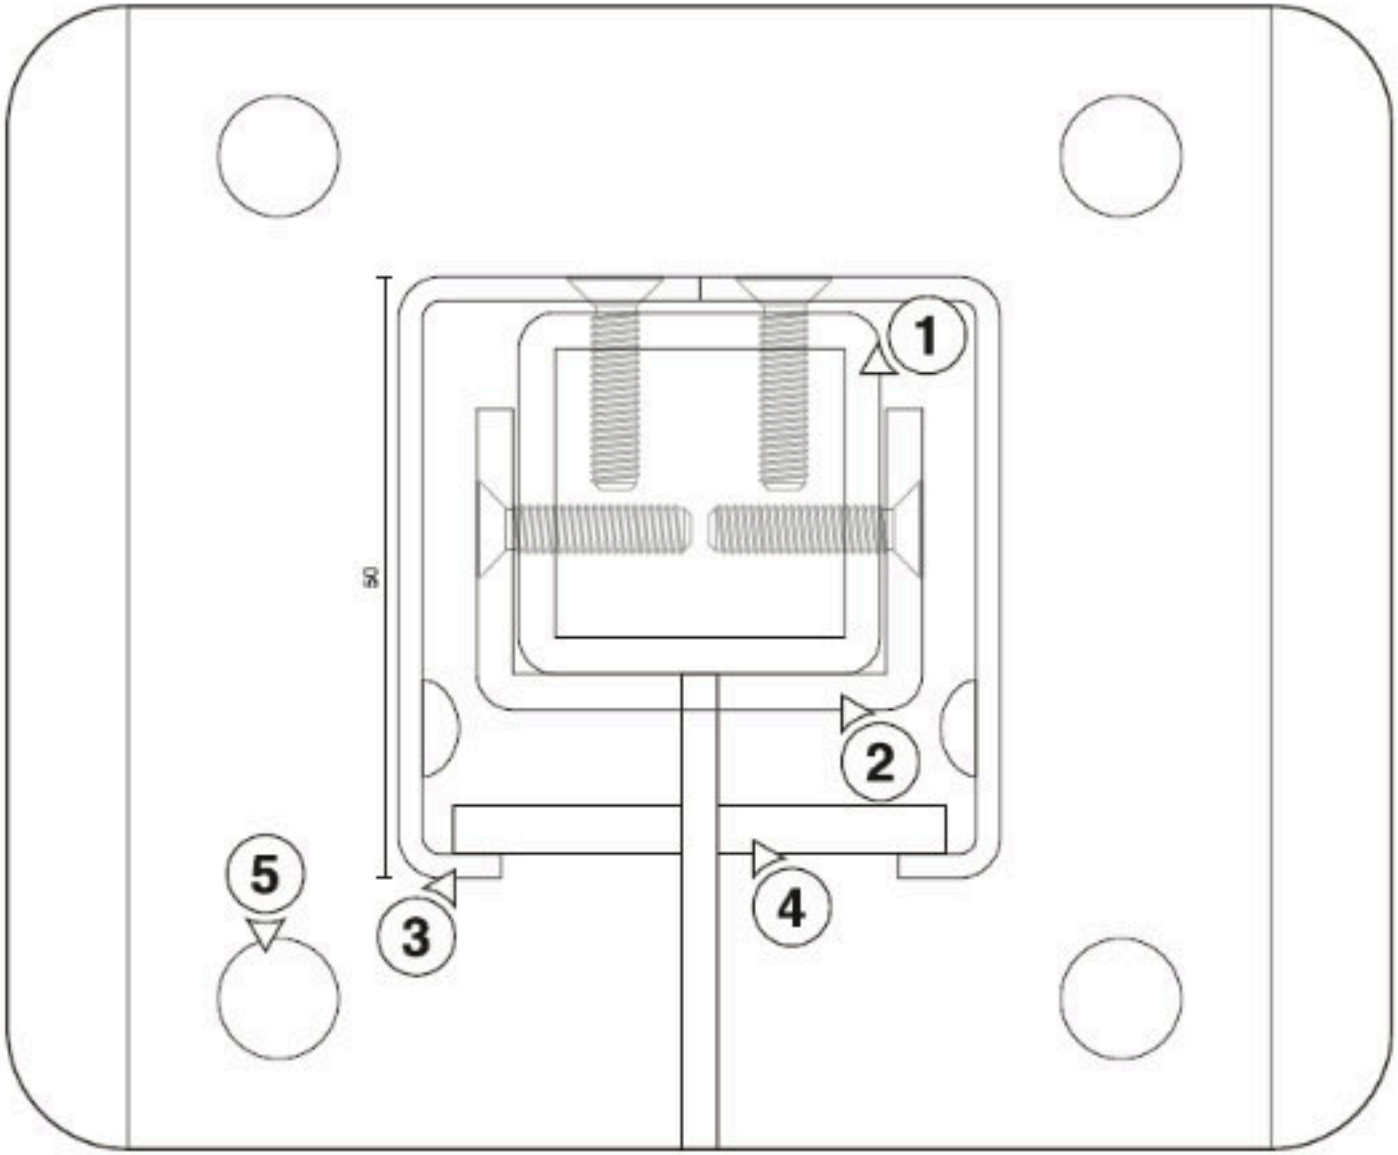

(1) 30mm x 30mm x 3mm SHS mild steel projection arm

(2) Folded 3mm Aluminium channel 460mm x 37mm x 25mm fixed to the Mild steel box section and this channel will have the flat cut 3mm Aluminium panel welded to it

(3) 2mm aluminium 'shroud' fixed in the top return into the arm. This has cutouts in the bottom return to allow for (4)


(4) 4mm Opal makrolon diffuser panels mounted inside of folded trim


(5) 6mm mild steel wall plate with 4x10mmØ holes for M8 fixings

ARTWORK PROOF

Client:	Kings Church
File Name:	DOOR SIGNS1331 450mm 90mm 1331
Date:	24.08.2026
Job No:	1331
Designer:	Hannah Gallagher
Version:	01

SIGNS EXPRESS MANCHESTER

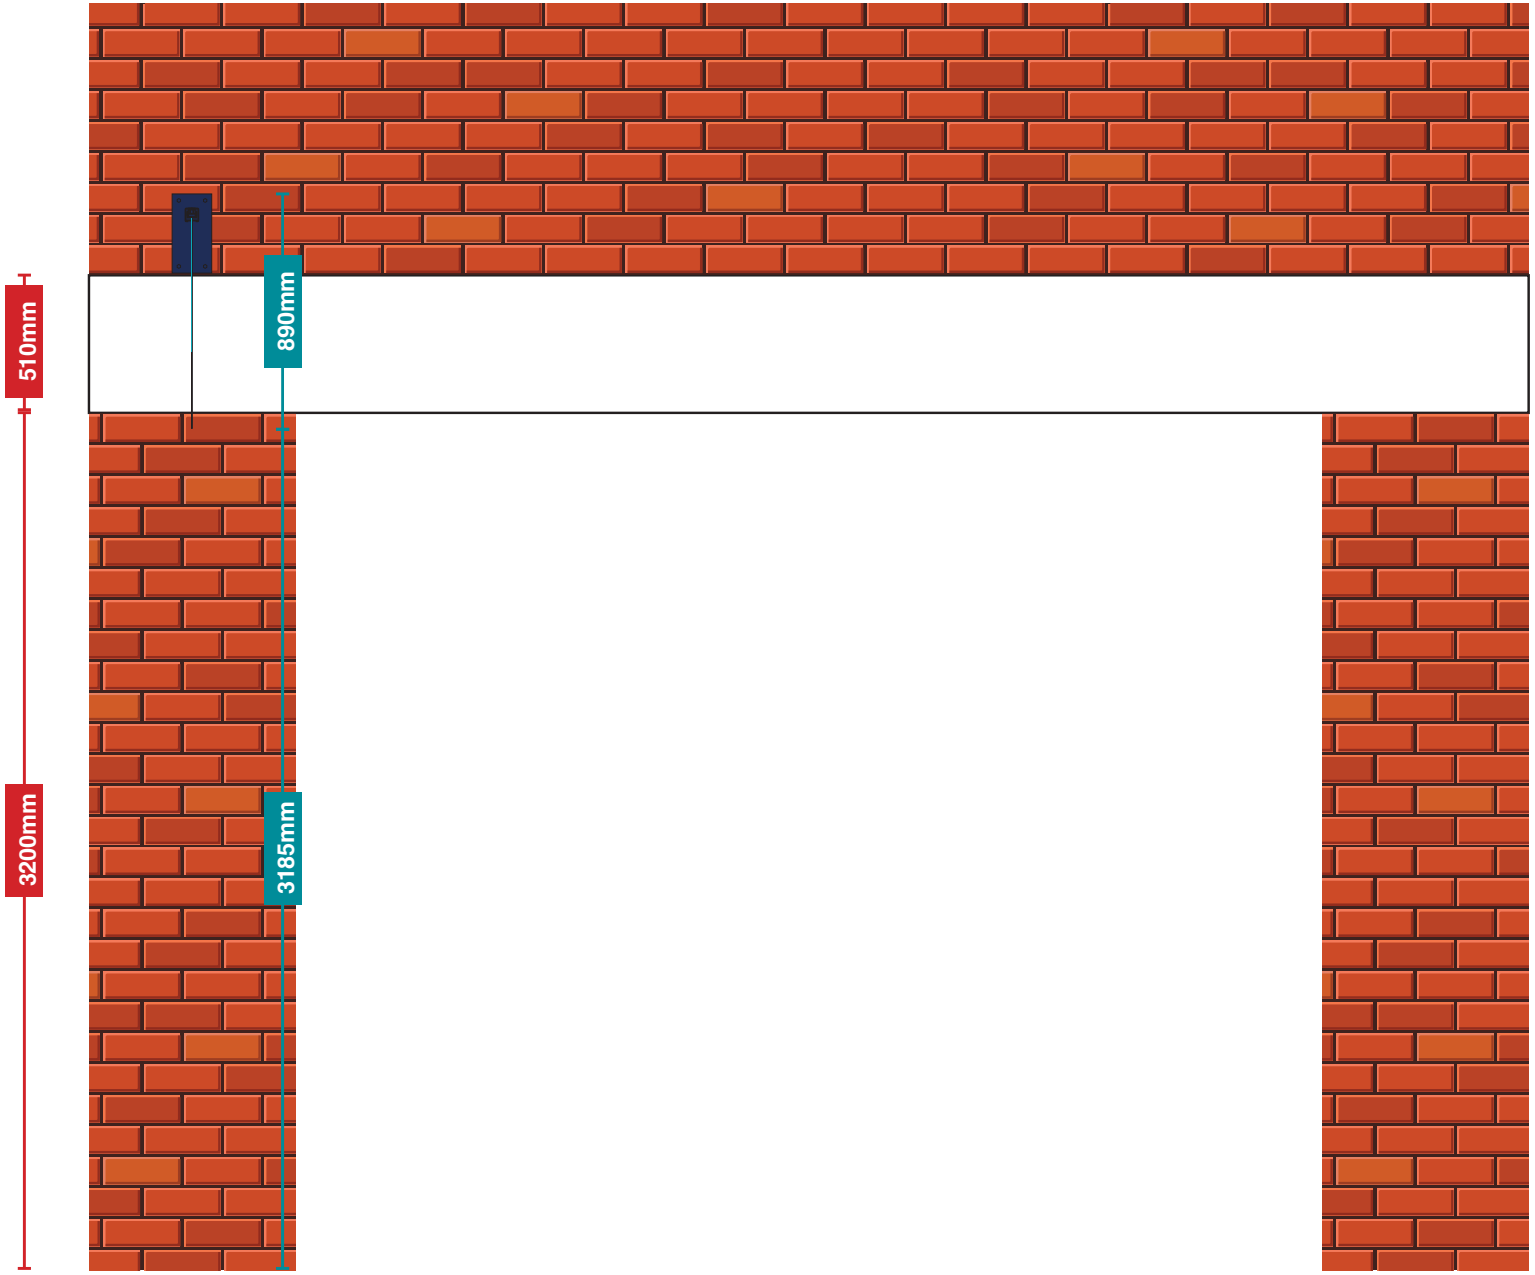

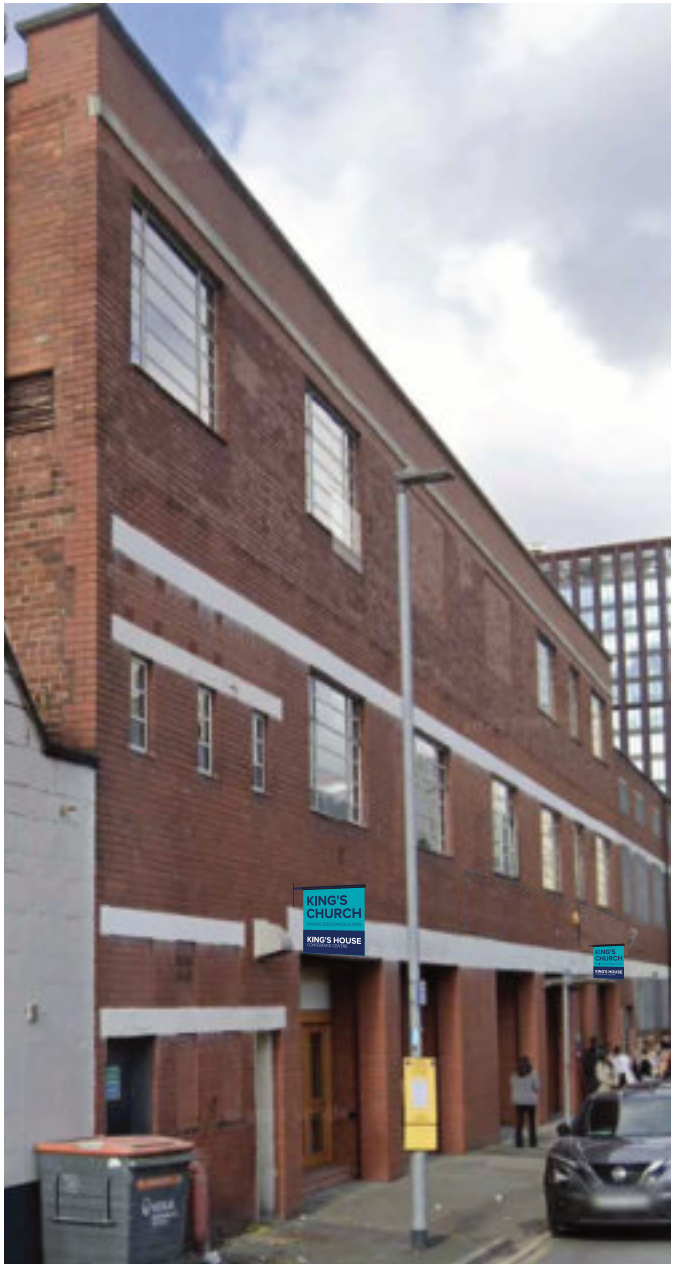

ARTWORK PROOF

Client:	Kings Church	**Job No:**	1331
File Name:	DOOR SIGNS1331 450mm 90mm 1331	**Designer:**	Hannah Gallagher
Date:	24.08.2026	**Version:**	01

SIGNS EXPRESS MANCHESTER

FRONT FACING LOCATIONS



ARTWORK PROOF

Client: Kings Church
File Name: DOOR SIGNS1331 450mm 90mm 1331
Date: 24.08.2026

Job No: 1331
Designer: Hannah Gallagher
Version: 01

SIGN REMOVAL



VINYL SIGNS:
2 Vinyl signs will be taken off the building and replaced by these new signs. This will be undertaken by the facilities manager of King's Church.