Kestrel 75 Window
Viewed Externally - 2no Required
NOT PAS 24 / SBD
U Value: 1.5W/m2K

Cill Carrier & 126mm Projecting Cill Pressing
Equal Leg Outer Frame
Open Out Window Sash - Internally Beaded - Square Bead

Standard Friction Stays
Cavity Fit Restrictor - 100mm Maximum Opening
Satin Chrome Espag Locking Handle


Black TTF400 Slimline Trickle Vent To Sash Head (4069EA)

Colour is Ral 9005 Matt - Jet Black


Glazing: (G1)
4mm Toughened (External)
20mm Black Thermal Spacer Bar, 90% Argon Filled Cavity
4mm Soft Coat 1.0 Toughened (Internal)

Required For Supply & Install:


Manufacture Size: 1485mm x 1035mm
Structural Opening Size: 1500mm x 1050mm

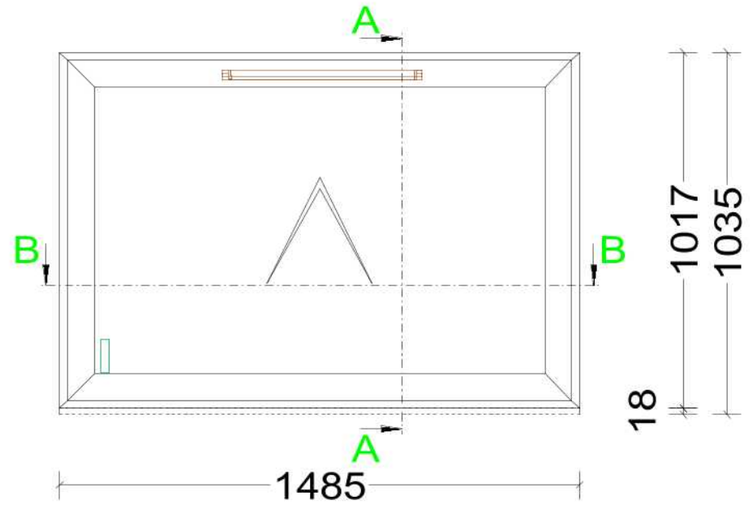

B-B

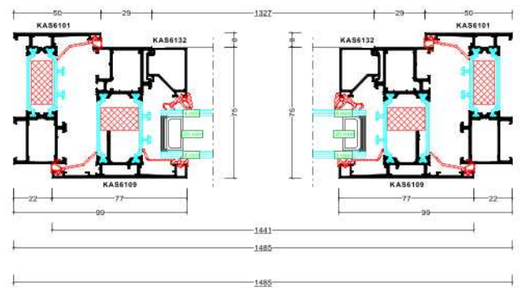

A-A

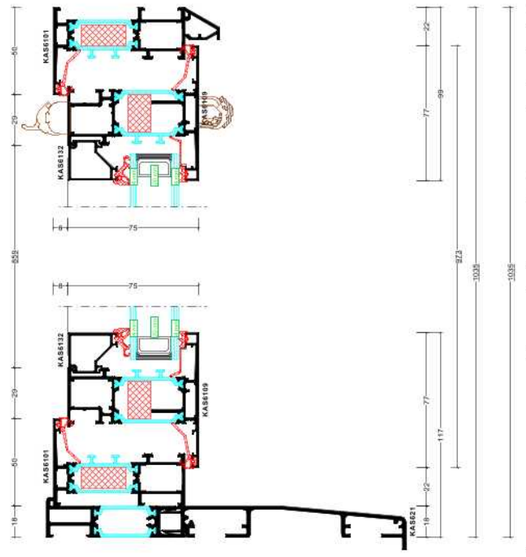

CBSolutions

Halifax Approach
Eastfield Park New Cut
Lissett
YO25 8PT

Tel: 01262 469130
Email: info@cbsol.co.uk

APPROVAL STATUS :-
[X] STATUS A' DRAWING/DESIGN APPROVED WITH NO FURTHER COMMENTS PROCEED WITH PROCESSING & MANUFACTURE
[ ] STATUS B' DRAWING/DESIGN APPROVED SUBJECT TO COMMENTS AMEND TO COMMENTS, PROCEED WITH MANUFACTURE
[ ] STATUS C' DRAWING/DESIGN NOT APPROVED AMEND TO COMMENTS, RE-SUBMIT FOR APPROVAL

AMENDMENTS

REV	DATE	AMENDMENTS	INTL
P02	02-03-2026	Amended Cill	CIP

STATUS: Construction — A1

CLIENT: Premier Modular Limited

PROJECT TITLE: YIF Manchester OMYOP

DRAWING TITLE: WT2 - W0-03 & 04

Visions & Values
C : OMMITMENT
B : ELIEVE
S : USTAINABILITY
O : PPORTUNITY
L : EARNING

www.cbsol.co.uk

DRAWN BY: Chris Page

DATE: 16-03-2026

CONTRACT NUMBER: SO0029995

DRAWING NUMBER: 29995-CIP-002 — REV.: C01

Scale: 1:3.5

PLEASE NOTE STANDARD LEAD TIME IS 6-8 WEEKS FROM FINAL APPROVAL OF DRAWINGS (STANDARD PRODUCTS)

PLEASE NOTE UNTIL WE RECEIVE FINAL APPROVAL OF DRAWINGS WE ARE UNABLE TO PROCURE ANY MATERIALS

THIS DRAWING IS COPYRIGHT OF CB SOLUTIONS & MUST NOT BE COPIED OR REPRODUCED WITHOUT WRITTEN PERMISSION