

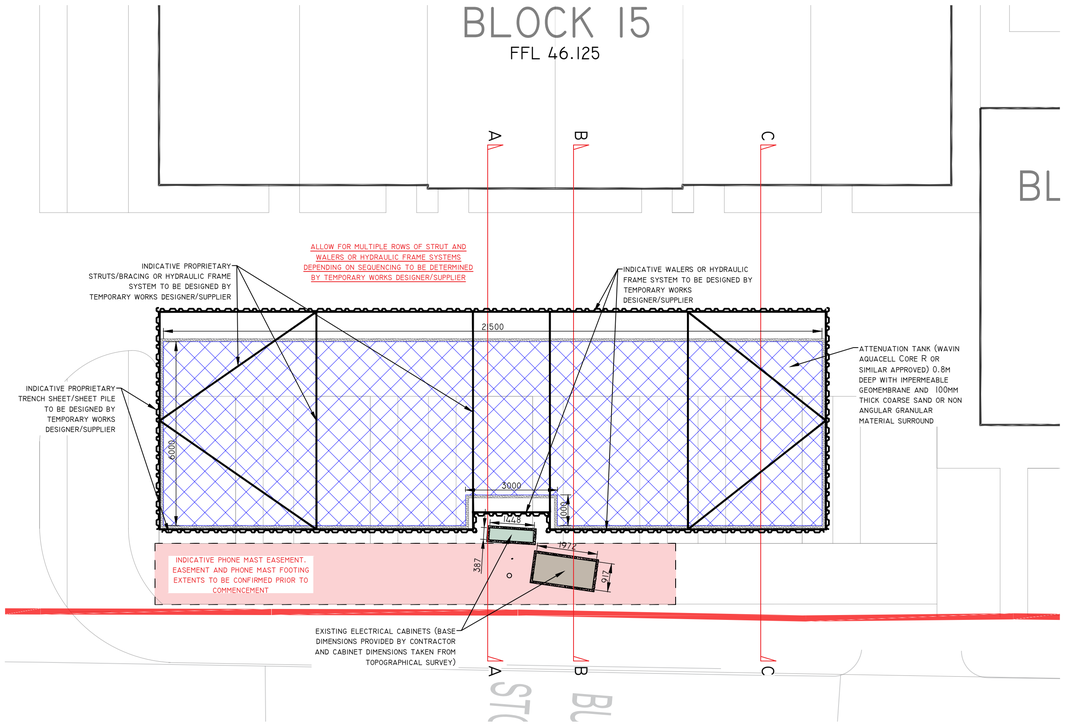



PARTIAL PLAN SHOWING PROPOSED ATTENUATION TANK AND EXISTING ELECTRICAL CABINETS
1:100 @ A1
1:200 @ A3

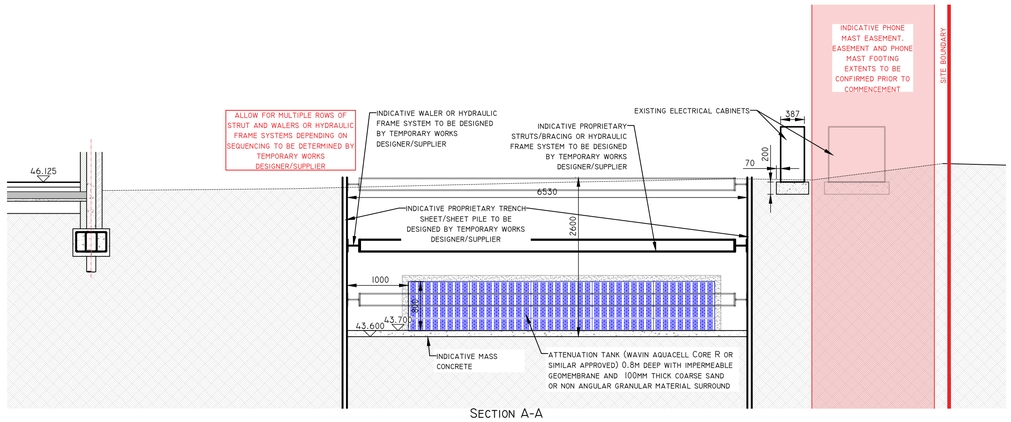

SECTION A-A
1:50 @ A1
1:100 @ A3

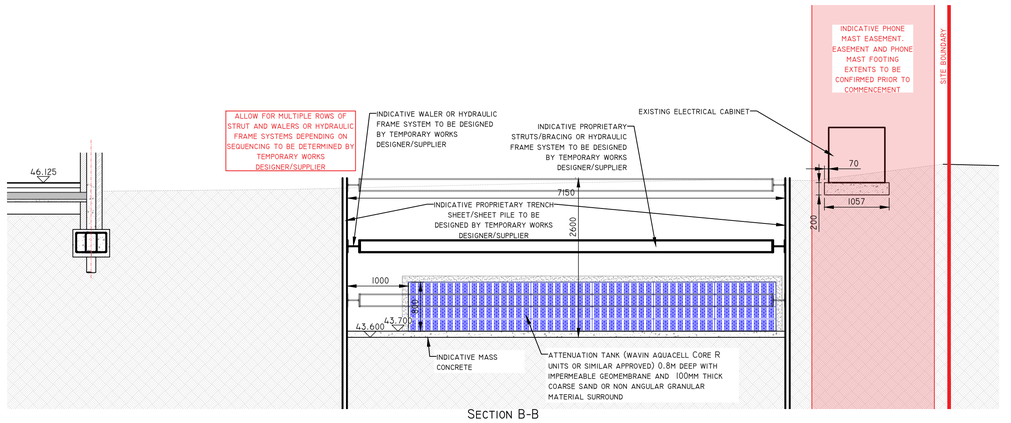

SECTION B-B
1:50 @ A1
1:100 @ A3

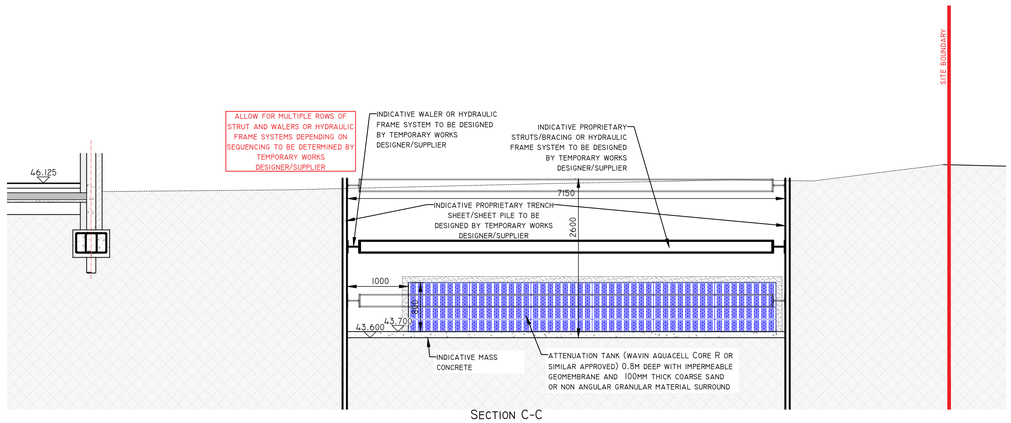

SECTION C-C
1:50 @ A1
1:100 @ A3

ALLOWANCE TO BE MADE FOR DEWATERING DURING EXCAVATIONS

DESIGN TO BE BASED ON THE TRIAL HOLES AND LOGS CARRIED OUT BY BOTH EARTH ENVIRONMENTAL AND GEOTECHNICAL AND E3P. ALLOW FOR MADE GROUND UP TO 1.8M BELOW GROUND LEVEL FOLLOWED BY LAYERS OF ORGANIC CLAY AND PEAT (POND MATERIAL). STIFF GRAVELLY CLAY NOTED FROM 3.2M BGL.

NOTES:

1. THIS DRAWING IS COPYRIGHT AND THE PROPERTY OF BELL MUNRO CONSULTING LTD. THE DRAWING MUST NOT BE REPRODUCED IN PART OR IN WHOLE WITHOUT PRIOR WRITTEN AUTHORITY.
2. THIS DRAWING MUST NOT BE SCALED BY EITHER CONTRACTORS OR OTHER CONSULTANTS ANY DIMENSIONAL OR SETTING - OUT DISCREPANCIES ARE TO BE REPORTED TO BELL MUNRO CONSULTING PRIOR TO CONSTRUCTION / FABRICATION COMMENCING.
3. THIS DRAWING MUST BE READ IN CONJUNCTION WITH THE RELEVANT BMC SPECIFICATIONS TOGETHER WITH THE APPROPRIATE ARCHITECTS AND SERVICES CONSULTANTS DRAWINGS AND SPECIFICATIONS.
4. MASS CONCRETE TO BE GRADE C20/25 WITH A MINIMUM CEMENT CONTENT OF 240KG/M^3 AND A MAXIMUM WATER / CEMENT RATIO OF 0.65
5. REINFORCED CONCRETE TO BE GRADE RC30/37 WITH A MINIMUM CEMENT CONTENT OF 300KG/M^3 AND MAX WATER/CEMENT RATIO OF 0.6
6. ALLOWANCE TO BE MADE FOR HAND DUG EXCAVATIONS IN VICINITY OF EXISTING DRAINAGE AND FOR ALL TEMPORARY SUPPORT AND PROTECTION OF EXISTING SERVICES AS NECESSARY
7. ALL CONCRETE TO BE IN ACCORDANCE WITH NATIONAL STRUCTURAL CONCRETE SPECIFICATION FOR BUILDING CONSTRUCTION.
8. ALL FOUNDATIONS TO BE IN ACCORDANCE WITH BS8004, FOUNDATIONS AND BS8110, STRUCTURAL USE OF CONCRETE.
9. FORMATIONS WHICH ARE TO BE LEFT EXPOSED OVERNIGHT PRIOR TO CONCRETING SHALL RECEIVE GRADE ST3 BLINDING TO BS5328 PART 2 1991.
10. MESH TO BE SUPPLIED WITH FLYING END TO TWO SIDES AND NESTED ON SITE TO AVOID CONGESTION.
11. LAPS TO MESH TO BE MINIMUM 45 TIMES BAR DIAMETER.
12. MESH / REINFORCEMENT TO BE FROM CARES REGISTERED SOURCE.
13. ALL CONCRETE TO BE IN ACCORDANCE WITH NATIONAL STRUCTURAL CONCRETE SPECIFICATION FOR BUILDING CONSTRUCTION.
14. HI-VIS REBAR PROTECTORS TO BE PLACED ON ENDS OF EXPOSED BARS AND ALL OPERATIVES TO WEAR EYE PROTECTORS (GOGGLES) TO AVOID INJURY.
15. MAX AGGREGATE SIZE 20MM

PRELIMINARY

REV	COMMENTS	DATE	BY
-	INITIAL ISSUE	31/07/26	CR

BMC

BELL MUNRO CONSULTING LTD

CONSULTING CIVIL & STRUCTURAL ENGINEERS
TURING HOUSE
5 ARCHWAY
MANCHESTER
M15 5RL
TEL: 0161 2098032
FAX: 0161 2098033
EMAIL: CONSULTING@BELLMUNRO.CO.UK
WWW.BELLMUNRO.CO.UK

CLIENT: VIEWS LTD.

PROJECT: FORMER BURNAGE CRICKET CLUB

TITLE: ELECTRICAL CABINET & ATTENUATION TANK TEMPORARY WORKS STRATEGY

DRAWN BY:	CHECKED BY:	SCALE:	DATE:
CR	SJB	1:50	07/26

DRAWING NUMBER: J9093/TW01

REVISION: -