Containment

	150mm x 55mm Basket
	100mm x 55mm Basket

Fire Wall

	60 Minute Fire Wall

Heights

Dis WC Hand Dryer - 900mm AFFL to underside of HD

Std WC Hand Dryer - 1150mm AFFL to underside of HD


AC Isolators - 800mm from underside of unit to underside of Isolator

Sockets & Spurs - 450mm AFFL to underside / 1000mm in Kitchens above worktops to underside

High Level Spurs - 2200mm AFFL to underside

External lighting - 2700mm from underside of building to underside of light

Photocell - 2700mm from underside of building to underside of PC

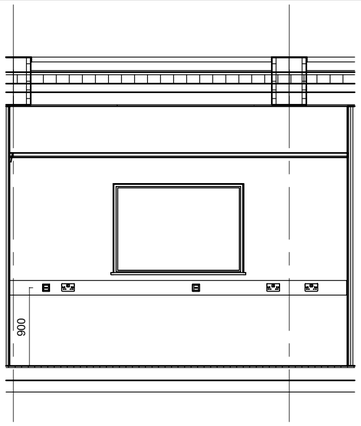

Small Power Abbreviations

C	Cleaners
CE	Cooker Extract
CU	Condenser Unit
DF	Down Flow
DIS	Disabled Alarm
EF	Extract Fan
FAP	Fire Alarm Panel
HD	Hand Dryer
IAP	Intruder Alarm Panel
MVHR	Mechanical Ventilation with Heat Recovery
PH	Panel Heater
WH	Water Heater
WL	Worktop Level - 1000mm AFFL
HL	High Level - 2200mm AFFL
CL	Ceiling Level

Security Schedule

Description	Image
External Sounder	
Door Contacts	
Intruder Alarm Panel	IAP
PIR Detector	
Key Pad	
Camera Dome	

Lighting Box & Controls

CR	Click Ceiling Rose c/w End Box & EMM	5
V4-S2 LCM	Lighting Control & Kit - V4-S2	3
V4-S LCM	Lighting Control & Kit - V4-S	2
V4-8 LCM	Lighting Control & Kit - V4-8	2
	SLW360N - PIR light controller	13

Small Power Schedule

Description	Image
Distribution Board	
Cooker Socket	CS
Cooker Switch – Neon Light	
Extract Fan Isolator	
Fused Connection Unit – Key Switched	
Fused Connection Unit – Switched	
Isolator – Single Phase	
Socket Outlet – Single – Switched	
Socket Outlet – Twin – Switched	2

Data Schedule

Description	Image
Single Data	
Twin Data	2

Fire Schedule

Description	Image
Fire Alarm Panel	FAP
Heat Detector With Sounder Beacon Base	HC
Manual Call Point	
Smoke Detector	SO
Smoke Detector With Beacon Base	SO
Smoke Detector With Sounder Beacon Base	SO

Accessibility Schedule

Description	Image
External Sounder Toilet Alarm	
Reset Switch	R
Toilet Assist Panel	
Toilet Assist Pull Cord	

9	Condensor locations amended, Kitchen amended to suit on site alterations	17/09/2026
8	Lighting amended in coordination with Lux level requirments	28/08/2026
7	Extraction added to Cleaners Store	19/08/2026
6	Solar PV details added	12/08/2026
5	PIR's identified	16/06/2026
4	DNO position added	28/05/2026
3	Cleaners socket moved in Bay 2	25/03/2026
2	CCTV added	24/03/2026
1	First Issue	24/03/2026

WARNER
ELECTRICAL CONTRACTORS LTD
Unit 15, The Trade Yard, Barmston Road, Beverley, East Yorkshire, HU17 0LA

THIS DRAWING AND DESIGN IS THE SOLE PROPERTY OF WARNER ELECTRICAL CONTRACTORS LTD AND MUST NOT BE COPIED, LOANED OR COMMUNICATED, IN WHOLE OR PART TO ANY THIRD PARTY WITHOUT CONSENT FROM THE COMPANY.

Client: Premier Modular

Project: YIF Scheme OMYOP

Title: Electrical Layout

Scale (at A2)	Drawn	Date:	Checked
1: 50	AJS	24.03.2026	

Drawing No.: WEC-5917-1001

Rev: 9