

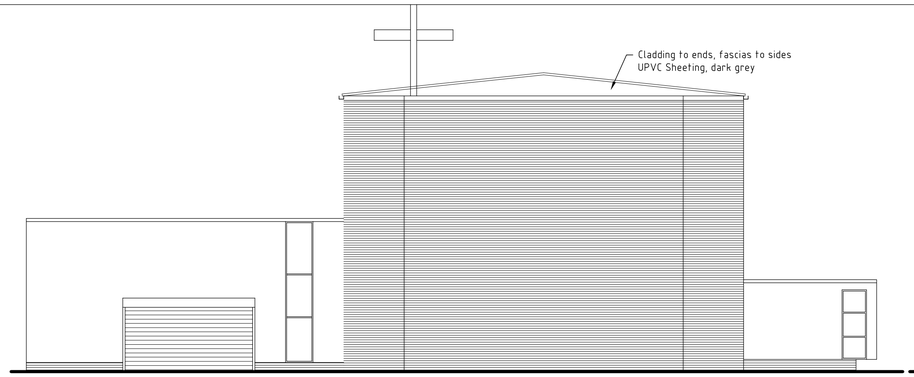



EAST (REAR) ELEVATION BUILDING ONLY

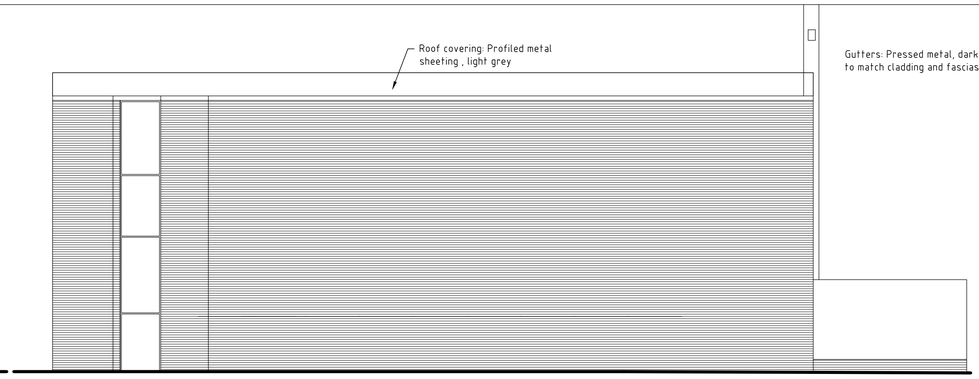


NORTH (MILKY BUTTON PARK) ELEVATION BUILDING ONLY

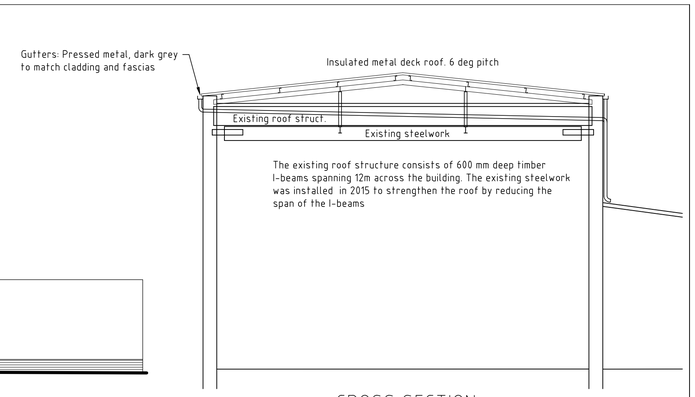

CROSS SECTION

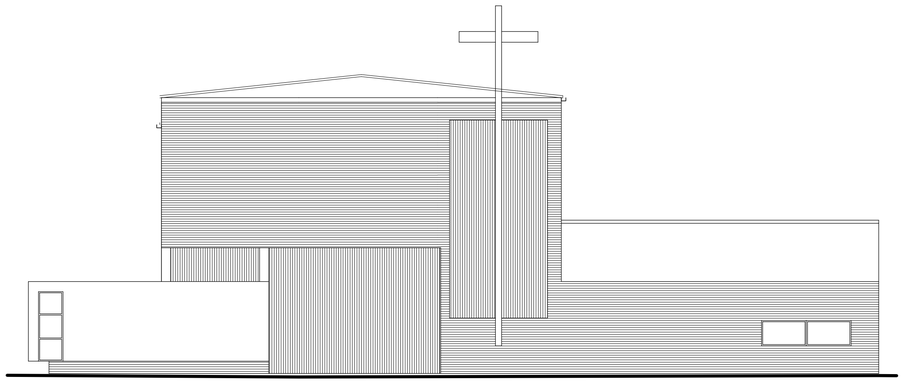


WEST (GREENBROW ROAD) ELEVATION BUILDING ONLY

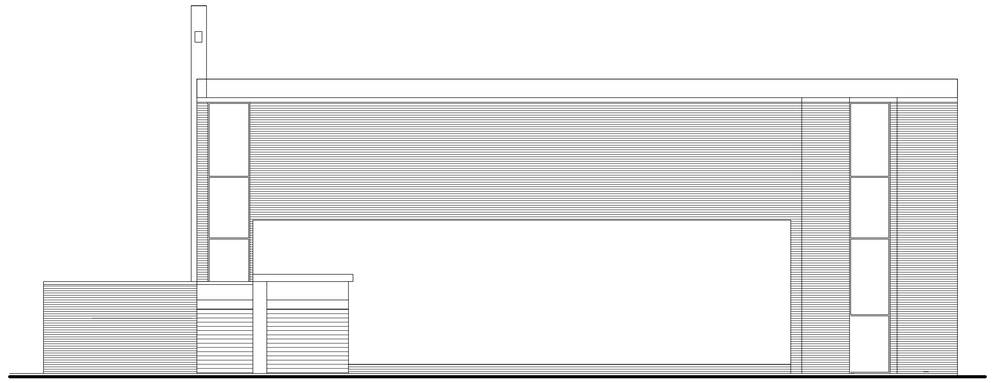


SOUTH (CHALFORD ROAD) ELEVATION BUILDING ONLY

NOTES

1. Existing roof covering and structure to be retained
2. Cut holes in existing roof covering and structure to take 90 x 90 SHS. Fix SHS members and waterproof round holes. Disturbance of existing timber ceiling to be kept to a minimum. Ceiling will be made good by others
3. Build masonry at both ends of roof, fix steelwork and wall plates round perimiter, all above existing roof
4. Fix roof sheeting, cladding, fascias, gutters and downspouts
5. All hot-rolled steel to be mechanically cleaned and primed with 1 coat of zinc chromate primer or equivalent after fabrication
6. All cold-rolled steel to be fixed in accordance with the manufacturer's instructions
7. ALL HOT-ROLLED STEEL TO BE S355 GRADE. ALL BOLTS TO BE GRADE 8.8
8. Fabrication details to be provided later

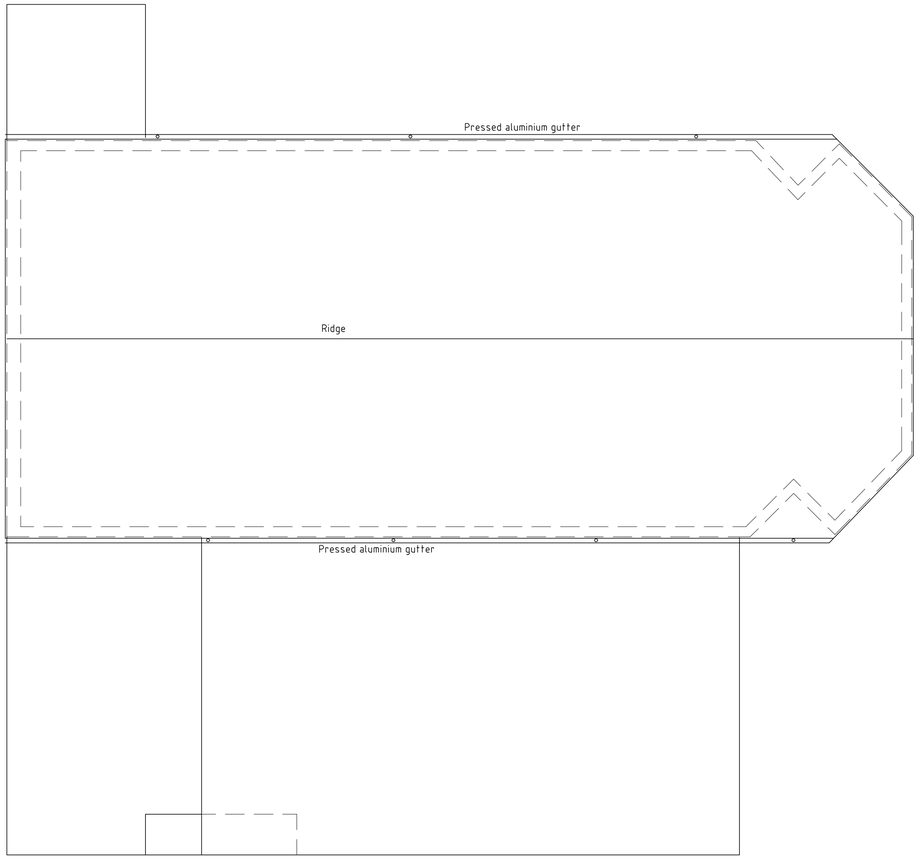

ROOF PLAN

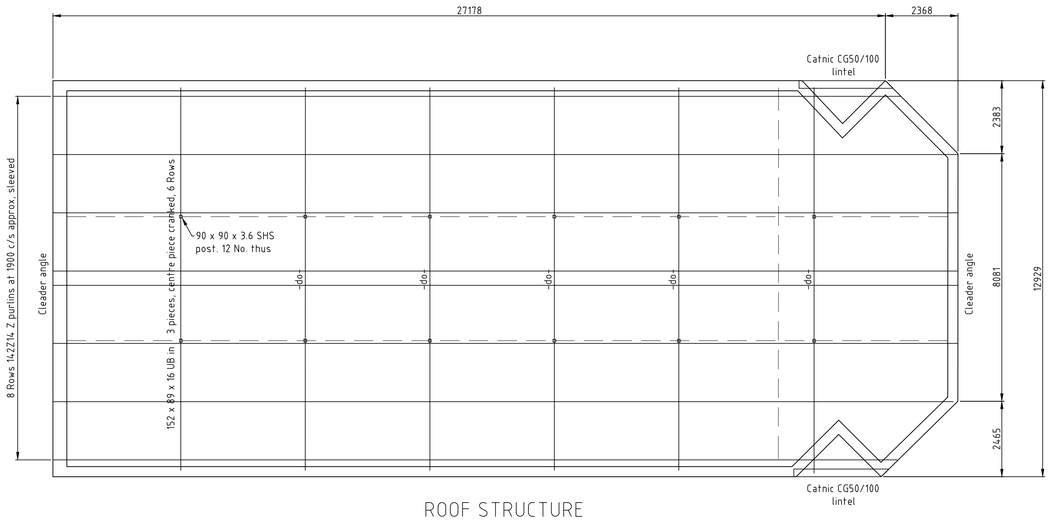

ROOF STRUCTURE

rev	date		by	chkd

status

client
AMC CHURCH OF RESTORATION

project
AMC CHURCH OF RESTORATION
CHALFORD ROAD ,
MANCHESTER M23 2SG

title
PROPOSED RE-ROOFING OF MAIN HALL.
PLANS AND ELEVATIONS AS PROPOSED

scales 1:100 at A1

drawn	checked	approved	date
PNH			JUNE 2023

contract no.	drawing no.	revision
22018	31	

Peter N Hewitt Associates Ltd
Consulting Engineers
3 Wadebridge Avenue, Baguley
Manchester M23 9LS
Tel. 0161-905 2555. Mobile 07946 642 414
E-mail: phewitt1@btconnect.com