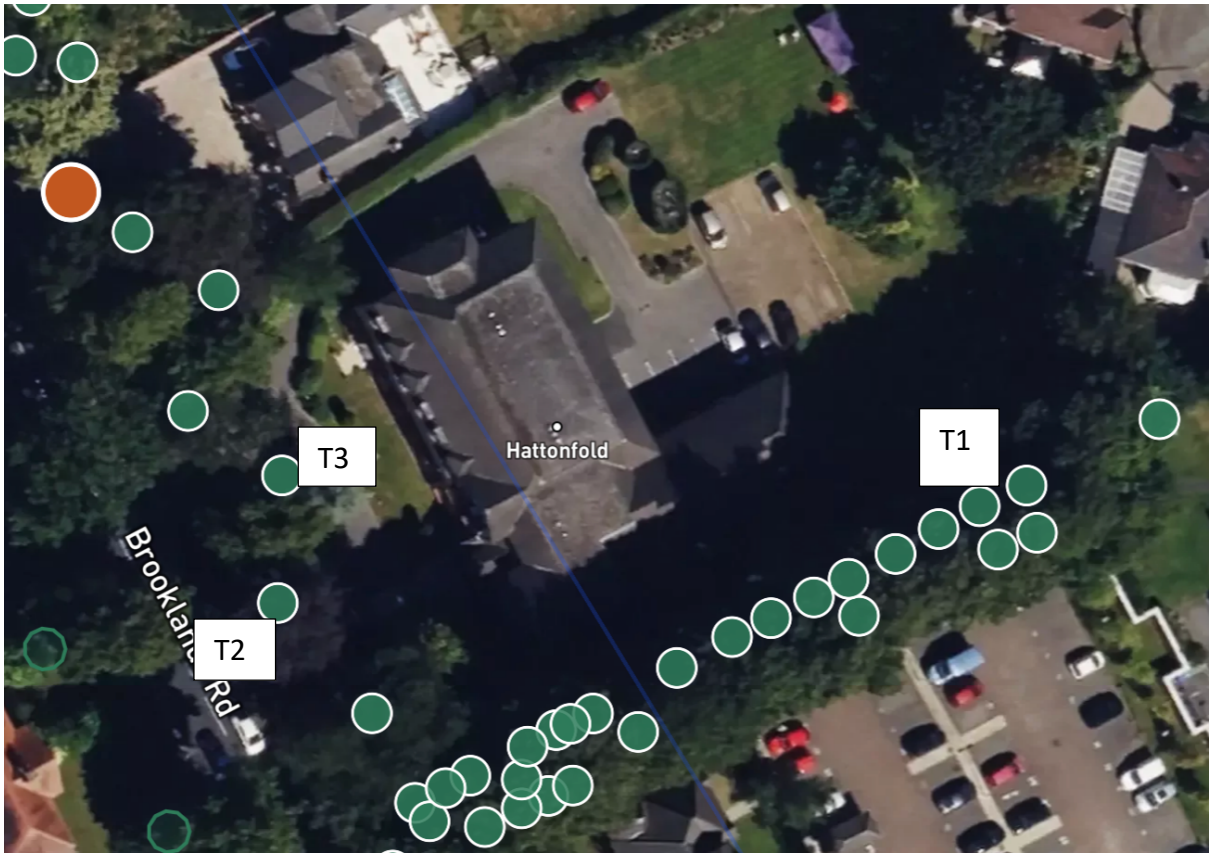


Hattonfold, Brooklands Road, M33 3PJ

T1 Norway Maple – Fell to low stump to prevent risk of further failure

- Topped in the past with large regrowth

- Recent first-order branch failure. The failure appears to have been initiated below the point at which the branch was previously topped, which appears significantly decayed

- Displacing adjacent wall

T2 Beech – Crown lift over highway to give at least 5.5m over road and 3m over pavement

T3 Lime – Remove epicormic growth from main stem