

GRAPHIC LAYOUT SCALE 1:50


100mm bleed to all artwork for "BANNER" finish
10mm bleed to all other artwork
- All copy converted to outlines
- All images embedded
- CMYK colour Mode
- 120dpi @ 100% minimum
- Supply as .pdf / .ai / .eps - INCLUDE CROP MARKS


Sq Mtr TOTAL - BANNER -
Sq Mtr TOTAL - SAV -



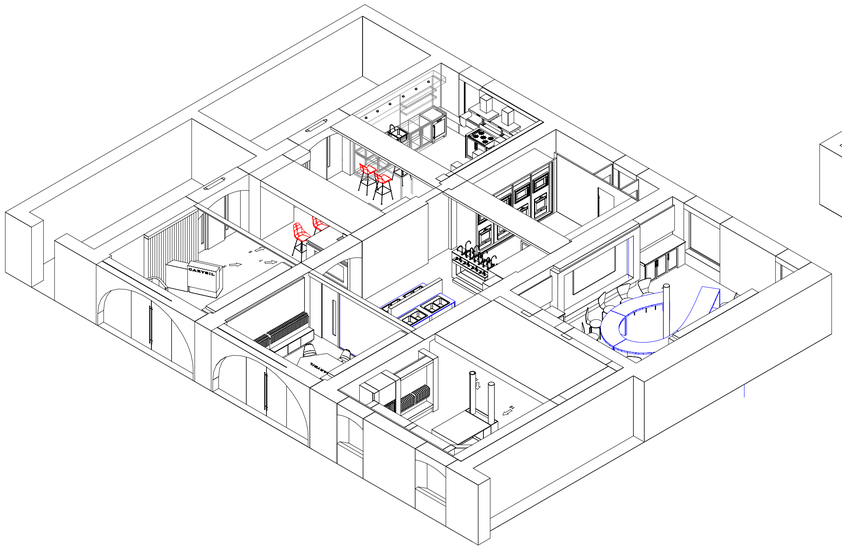

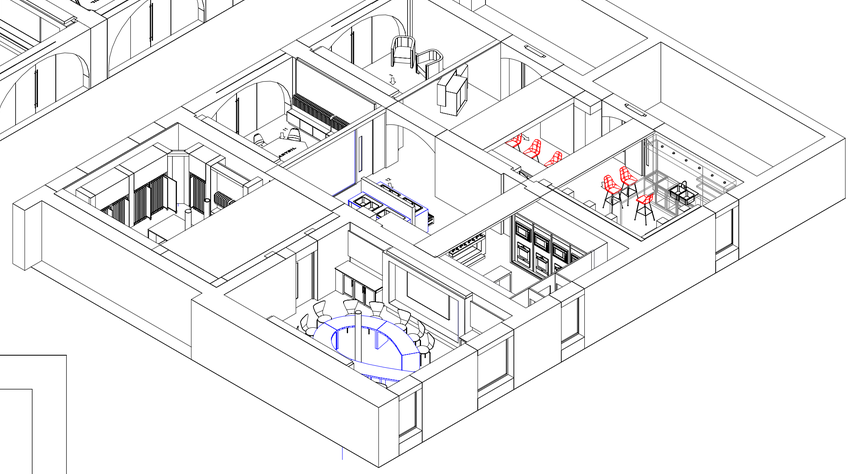

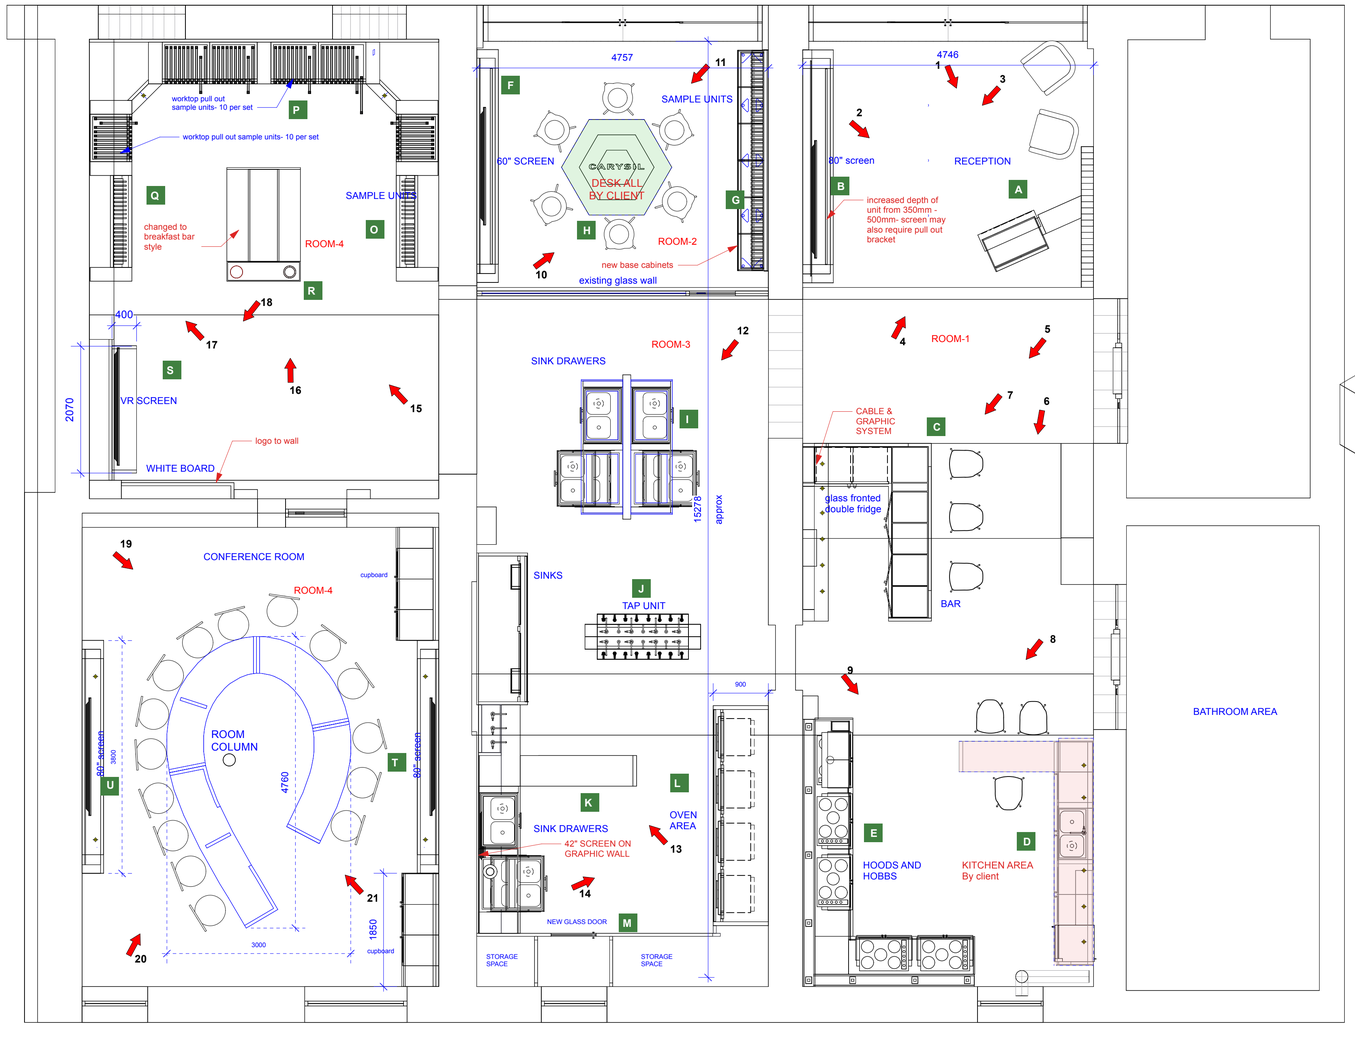

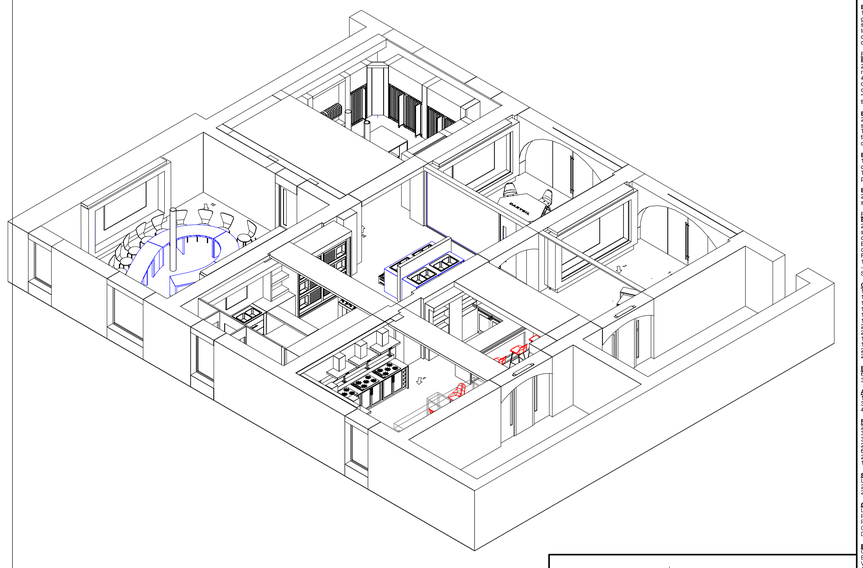

CLIENT / EXHIBITION

Client	
Project	
Dates	
Venue	
Hall Nº	
Stand Nº	
Job Nº	0
Design Ref	Q00

SPECIFICATIONS — BRONZE/SILVER/GOLD

SECTION BREAKDOWN:

RECEPTION:
Element (A):
- Reception Counter
1no angled reception counter constructed from two interconnecting box sections and finished in laminate. The 1m wide side of the counter to accommodate a client-supplied box section with the following:
- Slatted Feature Wall
1no slatted feature wall comprising 12no vertical slats within a top and bottom framed box section. Feature wall to connect directly to the reception counter and be finished in matching laminate.
- Furniture
Supply and position 2no armchairs same/similar as shown on the design visual.

Element (B):
- Media Wall Feature
1no media wall comprising a full-colour printed graphic back wall reinforced to receive a wall-mounted TV. The graphic panel to sit within a recessed box aperture finished in laminate to both internal and external faces, complete with a recessed aluminium LED diffuser and continuous LED light surround. The feature to include a laminate skirting detail below and a laminate picture frame detail above, as shown on the design visual.

ROOM-1:
Element (C):
- Corner Bar
1no right-angled corner bar finished in laminate. The bar frontage to feature recessed stone-effect glass shelving and lighting and a fluted-effect pattern, matching the locker panel and upper feature band. Client to supply and install the bar worktop surface.
- Back Bar Feature/ back Wall
2no laminate-finished vertical box section uprights supporting an overhead canopy feature. Canopy to be finished in matching laminate and incorporate recessed downlights. One upright to include a laminate vinyl graphic panel.
A central column clad in stone-effect laminate to support 4no laminate shelving units. Complete with 2no laminate-finished counter/top surfaces positioned either side of the column as shown on the design visual.
- Furniture
Supply and position 3no high stools, same or similar to those shown on the design visual.

Element (D):
- Kitchen Display
2no laminate-finished vertical box section uprights supporting an overhead canopy feature. Canopy finished in matching laminate and to incorporate recessed downlights.
Premium kitchen base units to be installed between the uprights, providing a display area for the client's own supplied and installed worktops, sink unit and waterfall-end table feature.
2no wall-mounted floating shelves finished in matching laminate.
The rear wall to incorporate a clients own decorative splash back panel as shown on the design visual.
- Furniture
Supply and position 3no high stools, same or similar to those shown on the design visual.

Element (E):
- Hoods & Hobs
Premium kitchen base units arranged in a right-angled configuration and fixed against laminate-finished box section walls. The box sections to be reinforced to support a powder-coated steel framework fixed between reinforced horizontal laminate-finished box sections at high and low level.
High level box sections to feature recessed downlights to shelving.
The display area to accommodate client-supplied and installed hobs and extractor hoods.
The steel framework to support laminate-finished illuminated shelving units as shown on the design visual.

ROOM-2:
Element (F):
- Media Wall Feature
1no media wall comprising a full-colour printed graphic back wall reinforced to receive a wall-mounted TV. The graphic panel to sit within a recessed box aperture finished in laminate to both internal and external faces, complete with a recessed aluminium LED diffuser and continuous LED light surround. The feature to include a laminate skirting detail below and a laminate picture frame detail above, as shown on the design visual.

Element (G):
- Graphic Wall
1no laminate-finished back wall featuring a face-mounted foamex graphic panel with printed and laminated artwork.
2no product display units manufactured from MDF and finished in a spray-applied satin paint. Each display unit to incorporate multiple grooves for the presentation of client-supplied surface sample boards.
The display units to be separated by 1no laminate-finished lockable storage cabinet complete with a spray-applied satin painted top.

Element (H):
1no bespoke meeting table base constructed from timber and MDF, finished in a spray-applied satin paint and reinforced to receive a client-supplied tabletop.
- Furniture
Supply and position 6no chairs, same or similar to those shown on the design visual.

ROOM-3:
Element (I):
Sink display unit comprising 2no double drawer sets positioned either side of a central dividing wall. The unit to be constructed from MDF with laminate-finished tops and side panels. Drawer frontls to be finished in a spray-applied satin paint and fitted with heavy-duty drawer runners.
The central dividing wall to be constructed from MDF and finished in a spray-applied satin paint, complete with a face-mounted full-colour printed SAV graphic with laminated vinyl finish.

Element (J):
1no tap unit/ box display finished in a spray-applied satin paint and a laminated shelf, client to supply taps. ICON to install.

Element (K):
- Sink Display Feature
2no laminate-finished vertical box section uprights supporting an overhead canopy, with an additional third upright creating a display alcove complete with a laminate back panel and glass shelving.
Canopy to be finished in matching laminate and incorporate downlights.
Custom base units to be installed between the uprights, providing a display area for client-supplied and installed worktops, sink units and waterfall-effect table. Units to be constructed from MDF with laminate-finished box sections and lower fronts to be finished in a spray-applied satin paint and fitted with heavy-duty drawer runners.
2no wall-mounted floating shelves finished in matching laminate.
1no sink display wall feature comprising a large laminate-finished box surround with recessed LED lighting housed within aluminium channels and diffusers. Client-supplied sink units to be horizontally recessed into the back wall within the illuminated feature surround.
- Furniture
Supply and position 2no high stools, same or similar to those shown on the design visual.

Element (L):
- Appliance Display Wall
1no appliance display wall comprising a back panel designed to accommodate client-supplied integrated oven and appliance units. The display wall to feature recessed appliance apertures within a laminate-finished box surround, complete with recessed LED lighting housed within aluminium channels and diffusers to create a continuous illuminated perimeter feature.

Element (M):
1no storeroom constructed from two separate walling sections finished with full-colour printed banner graphics. The storeroom to incorporate a glazed door section providing access to the internal storage area.
Internally, the storeroom shall feature 2no supporting partition walls to left and right of the glass door complete with integrated curtain poles and curtains to access the storage openings, as shown on the design visual.

ROOM-4:
Element (O):
2no corner display alcoves finished in laminate, each incorporating an overhead canopy with recessed downlighting and applied vinyl graphics.
4no pull-out sample board display racks designed to allow client sample boards to be viewed and concealed as required. Display racks to be separated by laminate-finished vertical box section cabinets.
Note: Sample board display racks are subject to final weight, size and loading requirements of the client-supplied sample boards.

Elements (N&P):
2no laminate-finished box aperture display units, each incorporating a recessed LED perimeter feature and a face-mounted foamex graphic panel.
The rear of each aperture to feature a full-colour printed banner graphic. Each display to include a face-mounted product display unit and integrated floral trough forming part of the base section, both constructed from MDF and finished in a spray-applied satin paint.

Element (Q):
1no central kitchen island display comprising 3no premium kitchen units arranged back-to-back. The units to be designed to receive a client-supplied worktop surface.
The island unit to be fixed to a central pillar incorporating an integrated floral planter. The pillar and planter surround to be finished in a spray-applied satin paint.

Element (S):
2no banner finished right angled walling sections to house a laminate finished shelving unit and space for clients own VR Screen.

ROOM-5:
Element (U&T):
2no media walls comprising banner-wrapped rear walls reinforced to receive wall-mounted 80" screens. Each display wall to sit within a laminate-finished box aperture incorporating recessed downlights and LED strip lighting to illuminate the display areas.
Client to supply and install the 2" laminate worktop to finish the 2no laminate finished lockable storage cabinets complete with spray-applied satin painted tops. Above each cabinet, will feature a face-mounted Foamex graphic panel with laminated full-colour printed artwork.
1no teardrop shaped conference table manufactured and supplied by client.
- Furniture
Supply and position 15no chairs, same or similar to those shown on the design visual.

GRAPHICS:
1no 3.1m x 1.6m full colour printed banners to media wall (element B)
1no 0.7m x 0.5m SAV laminate finish graphics panel to upright (element C)
1no 3.1m x 1.6m full colour printed banners to media wall (element F)
1no 2.5m x 1.2m 5mm foamex with laminate finished print (element G)
1no 2m x 0.5m SAV laminate finish graphics panel to upright (element I)
1no 2.5m x 1.2m 5mm foamex with laminate finished print (element M)
2no 1.7m x 1.5m full colour printed banners (element N&P)
2no 0.75m x 0.75m SAV laminate finish graphics panel to upright (element N&P)
1no 1.9m x 2.1m full colour printed banners to wall (element S)
1no 2.3m x 2.1m full colour printed banners to wall (element S)
2no 3.2m x 1.4m full colour printed banners to media walls (element U&T)
2no 1.9m x 1m 5mm foamex with laminate finished print (element T)

ELECTRICS:
60m Cool lighting (elements B,F,K,L,N,P)
37no recessed downlights (elements C,D,E,K,O,U,T)

AV:
5no 60" screens to include wallmount, cabling, installation and derig to central structure
3no 80" screens to include wallmount, cabling, installation and derig to central structure
4no SmartDrive, otherwise by client

FURNITURE:
2no arm chairs (elements A&B)
3no bar stools (element C)
3no bar stools (element D)
2no bar stools (element K)
6no chairs (ROOM-2)
2no arm chairs (element S)
15no chairs (ROOM-4)

STOREROOM:
Lockable door with 2x sets of keys
2no curtain poles
2no curtains

OTHER:
Liaison with all on-site services & contractors
Production & submission of all relevant CDM compliance documentation (RAMS, CPP, etc)
Permission to build submission & liaison with show organiser
Clear site
Dispose of waste, where necessary

EXCLUDES:
Organiser imposed, 'inspection/right to build' fees, or similar
Exhibit or stock service requirements or logistics, unless specified
VAT, charged at appropriate rate
Artwork creation where required
VR Area
Surfaces
Floor
Taps
Sinks
Plumbing & floor coverings as seperate costs

1:25 @ A1 | WB | MB | RB | MN | PW | GS | WJ

DRAWING BY: PAUL WILD, GAVIN STEVENS

ORIENTATION - NTS

PLAN

ALL SIZES ARE PROVISIONAL AND WILL REQUIRE PRODUCTION
SITE SURVEYDIMENSIONS PROVIDED MAY NOT BE ACCURATE -10TH JUNE 2026

©

Date: 26/6/26
Time: 8:51:56
File name: Carysil_showroom_opt001_rev001_with meeting room.vwx