


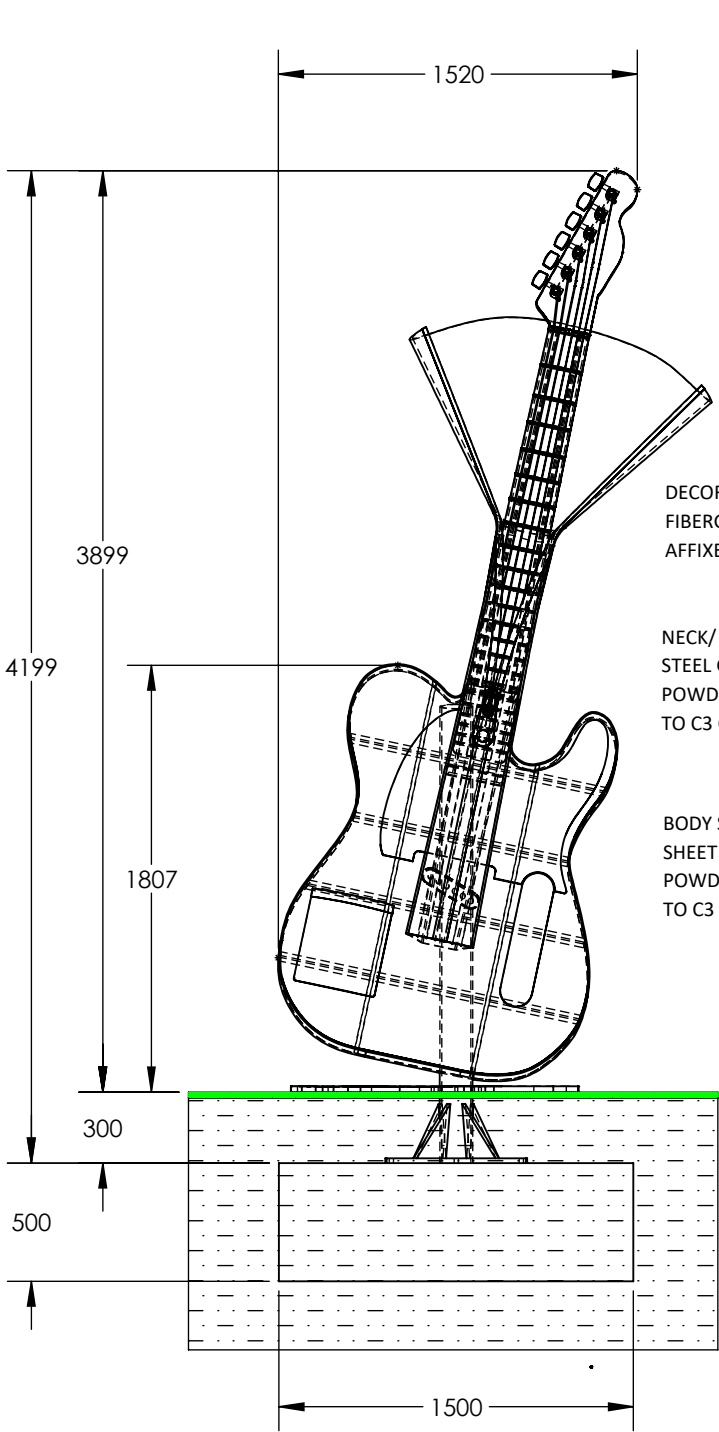

DECORATIVE
FIBERGLASS ITEMS
AFFIXED TO STRUCTURE


NECK/ HEAD STRUCTURE SHEET
STEEL GRADE S355
POWDERCOAT / WET PAINT FINISH
TO C3 CORROSION SPECIFICATION

BODY STRUCTURE/ CENTRAL COLUMN
SHEET STEEL GRADE S355
POWDERCOAT / WET PAINT FINISH
TO C3 CORROSION SPECIFICATION

BOLT POST GRADE S355 or S275
STEEL
8N/O GRADE 8.8 STUDS BZP
FINISH
M24 TYPICAL

FRONT - ELEVATION

RC PAD FOUNDATION
TYPICAL R16 REBAR 200mm
CENTRES OR SIMILAR
MIN 50mm COVER

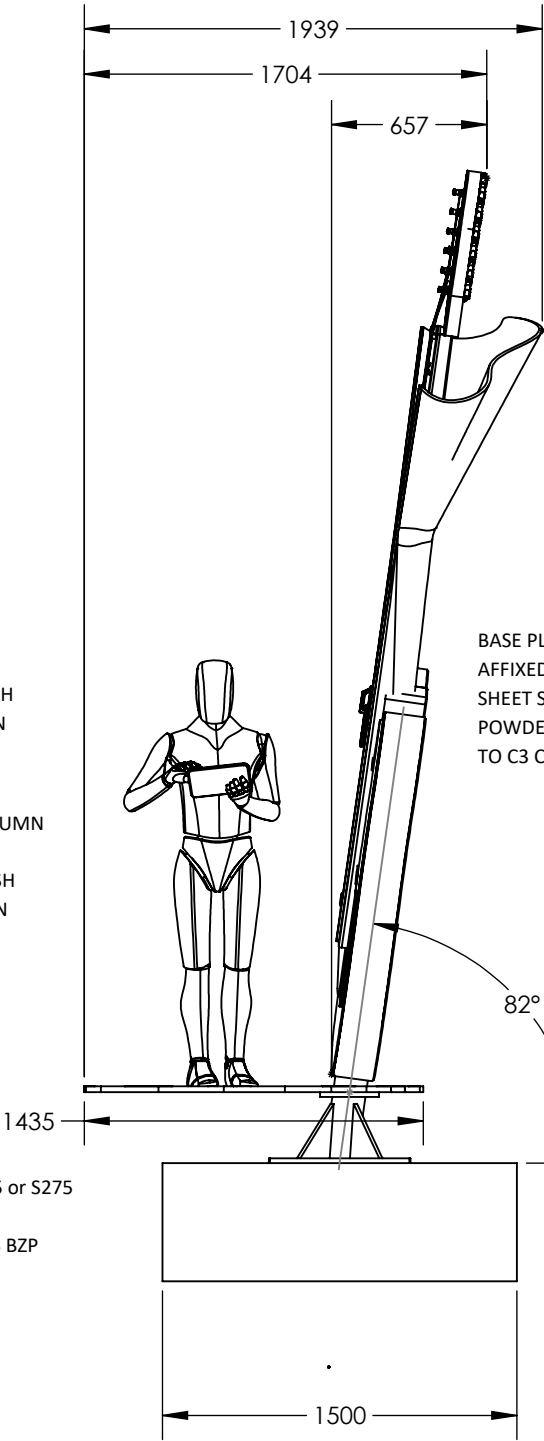


BASE PLATE SELF SUPPORTING
AFFIXED TO CENTRAL COLUMN
SHEET STEEL GRADE S355 BLACK
POWDERCOAT / WET PAINT FINISH
TO C3 CORROSION SPECIFICATION

HEADSTOCK BOLT ON DECORATIVE ITEMS
STEEL GRADE S355 BLACK
POWDERCOAT / WET PAINT FINISH
TO C3 CORROSION SPECIFICATION

GROUND LEVEL
UPLIGHTS

POWER + DATA TO
COLUMN

SIDE - ELEVATION

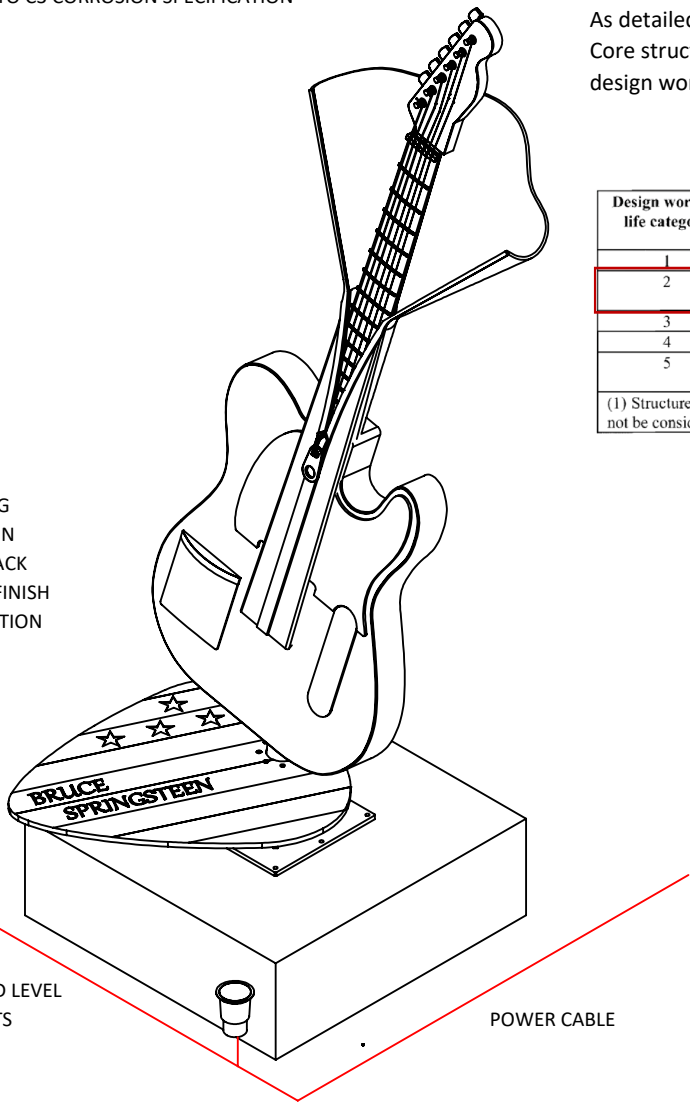

POWER CABLE

Design Notes:

Structures shall be designed and assessed to the following applicable standards Principally;




- Eurocode 0: Basis of structural design (EN 1990)
- Eurocode 1: Actions on structures (EN 1991)
- Eurocode 3: Design of steel structures (EN 1993)
- Eurocode 7: Geotechnical design (EN 1997)
- Eurocode 9 : Design of aluminium structures (EN 1999)

As detailed in EN1990
Core structural elements will be designed with an indicative design working life as shown below

Table 2.1 - Indicative design working life

Design working life category	Indicative design working life (years)	Examples
1	10	Temporary structures ⁽¹⁾
2	10 to 25	Replaceable structural parts, e.g. gantry girders, bearings
3	15 to 30	Agricultural and similar structures
4	50	Building structures and other common structures
5	100	Monumental building structures, bridges, and other civil engineering structures

(1) Structures or parts of structures that can be dismantled with a view to being re-used should not be considered as temporary.

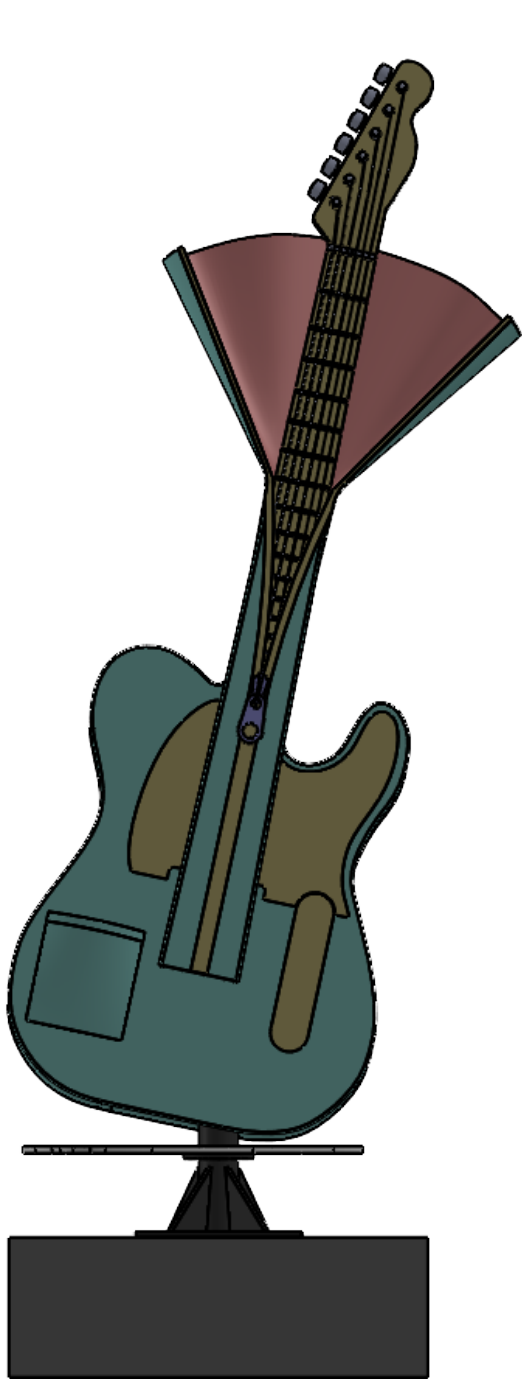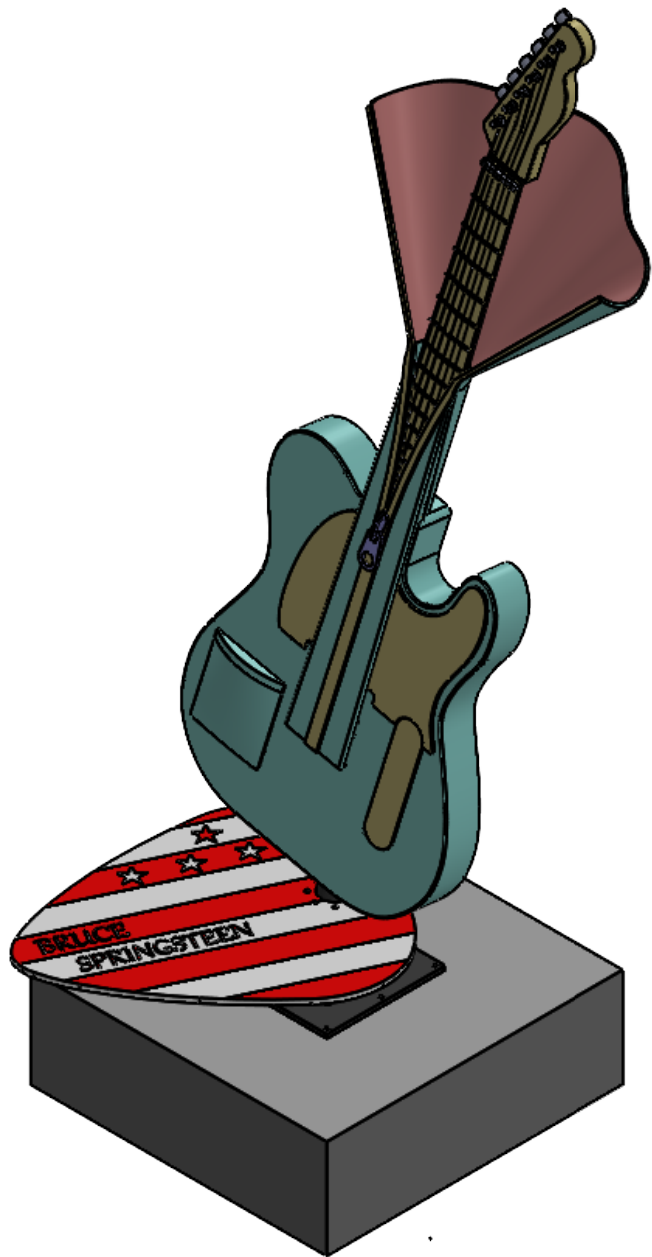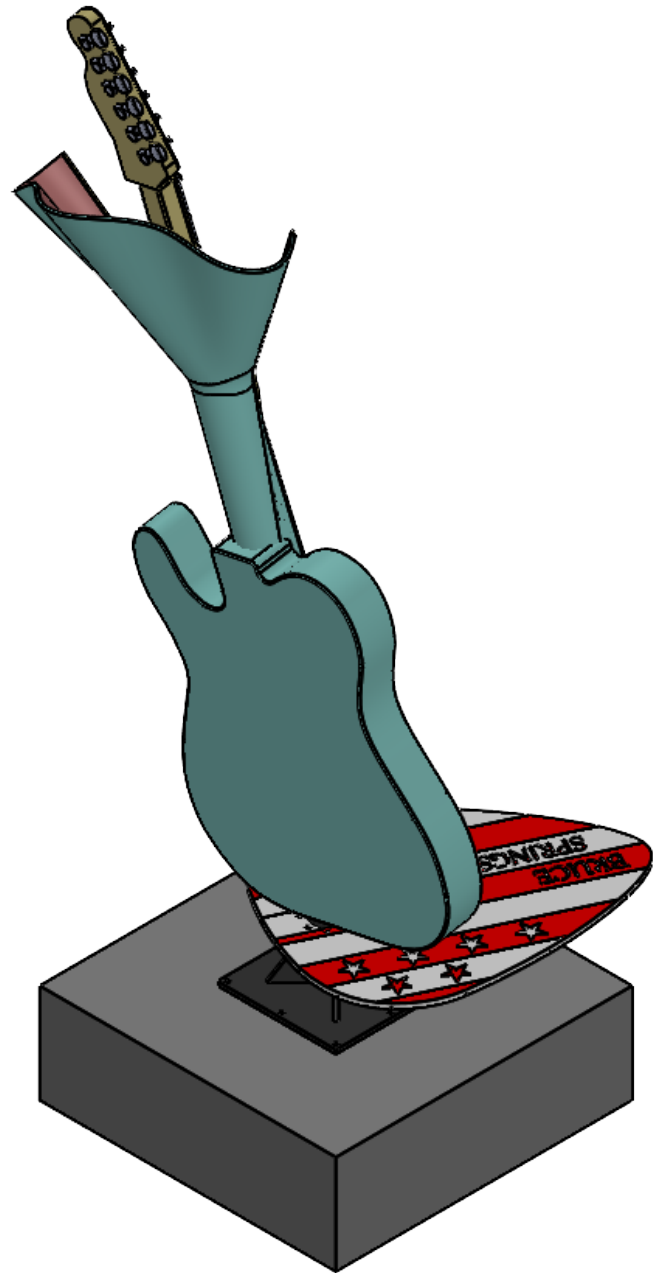

Design Notes:

Structures shall be designed and assessed to the following applicable standards Principally;

- Eurocode 0: Basis of structural design (EN 1990)
- Eurocode 1: Actions on structures (EN 1991)
- Eurocode 3: Design of steel structures (EN 1993)
- Eurocode 7: Geotechnical design (EN 1997)
- Eurocode 9 : Design of aluminium structures (EN 1999)

As detailed in EN1990
Core structural elements will be designed with an indicative design working life as shown below

Table 2.1 - Indicative design working life		
Design working life category	Indicative design working life (years)	Examples
1	10	Temporary structures ⁽¹⁾
2	10 to 25	Replaceable structural parts, e.g. gantry girders, bearings
3	15 to 30	Agricultural and similar structures
4	50	Building structures and other common structures
5	100	Monumental building structures, bridges, and other civil engineering structures
<small>(1) Structures or parts of structures that can be dismantled with a view to being re-used should not be considered as temporary.</small>		

The drawings presented are visual concepts to be used for bidding purposes only and are not to be used for construction.

Any notes on construction or materials are indicative, and are to be used to communicate design or finishing intent only.

The designer will not assume responsibility for improper construction, use or handling of structure, structural or scenery elements.

All materials must comply with applicable local and regional structural, construction and fire and safety codes.

DO NOT SCALE FROM THIS DRAWING.

All dimensions must be checked on site prior to the commencement of installation. Any errors or omissions must be brought to the attention of the designer.

IF IN DOUBT ASK.

PROJECT: NS2515_GUITAR_PARK

CLIENT: COOP_LIVE

VENUE: COOP_LIVE

TITLE:

SCALE: 1:27

ORIGINAL SIZE: A3

DRAWN: JamesMartin

REV:

DRG DATE: 27/05/2025

DWG No: NS2515_02_CONSTRUCTION_DETAIL

A

NEWSUBSTANCE LTD, GREENSAND FOUNDRY, 99 WATER LANE, LEEDS LS11 5QN
WWW.NEWSUBSTANCE.CO.UK

NOT FOR CONSTRUCTION

Lighting Playback Controller

The Pharos LPC (Lighting Playback Controller) is an award-winning, all-in-one control solution for themed entertainment and LED lighting installations. It features individually controllable and independently running timelines and scenes, letting you build dynamic, precise, fully customisable pre-programmed lighting effects with the freedom of real-time manual overrides and the versatility of powerful show control and integration features.




LPC Features



Designer Engine

The intelligent Designer Engine gives you complete control of your installation. Based on individually controllable and independently running timelines and scenes, it lets you build dynamic, precise, fully customisable pre-programmed lighting displays, all while giving you the freedom of real-time manual overrides, flexible multi-zone control, prioritisation and more.



Designer Trigger

Timing is everything. Whatever the stimulus, Designer Trigger can handle it. You can control your lighting with responsive, reactive programming. Designer Trigger is a rules engine that uses conditional logic and a broad range of interfaces and protocols. Send and receive any command, to and from any system. Conditional logic is supported, along with a powerful built-in scripting language for unlimited flexibility.



Flexible

Be limited by your design brief, not your control system. Our products support a vast range of different fixture types and can output multiple DMX-over-Ethernet (eDMX) lighting protocols at the same time. No other system gives you this level of flexibility and control over your project.




Custom Interfaces

Create a custom web interface for your installation that gives your users the control they need and the look they expect. Our built-in web server supports an extensive JavaScript and HTTP API and access control with multiple user levels.



Remote Management

Future-proof your lighting projects by connecting your Designer controllers to Pharos Cloud. This allows direct control of your Controllers from anywhere in the world, letting you check all of your Controllers' statuses, inputs and outputs, firing triggers, scheduling events, uploading new projects and much more. All Pharos Designer Controllers also have their own Web Interface that can be accessed on a local area network that provides real-time statuses, access to the full log and the ability to fire triggers on the controller.



Designer Mapping

Design the big picture; control every pixel. Create a map of your fixtures within the Designer software, then use Designer Mapping to create visually striking effects or play video across the entire array. Powerful controls allow you to build maps fast with pixel-precise adjustment. Multiple maps can be created to support different zones or for modelling different views of your installation.



Scalable

The right fit for every installation. Multiple Pharos Designer Controllers can be seamlessly linked together to work as one via a standard Ethernet network giving impressive scalability. For additional integration options simply add Remote Devices to further extend the network. Whether one Controller or many, it's all easily programmed using our Designer software.



Pharos Designer

Programmed and configured using the free Pharos Designer software – available for Windows or macOS – with upload over Ethernet.




Reliable

Hardware and firmware are self-sufficient, so no PC needs to be left on site. Rugged, compact unit designed for 24/7 operation and reliability.



Installer Friendly

Made for permanent installation, with installer-friendly connectors and easy DIN rail mounting.



Supported Fixtures

LEDs	Any colour configuration e.g. RGB, RGBW, 8-bit, 16-bit, tuneable white
Generic	Downlights, spotlights, uplights, etc. via controllable dimmers, relays or ballasts
Intelligent	Moving and multi-parameter fixtures
Fountain Jets	Fountain jets for fountain animation or other animatronics
Fixture Library	Pharos offers a cloud library with over 30,000 fixture profiles, for easy download of your luminaires

Output

DMX512 RDM	2 ports (max 512 channels each) USITT E1.11-2008 Via local ports or Art-Net, supports discovery and addressing via Designer 2 software
sACN	USITT E1.31 (with per fixture priority) standard
Art-Net	Art-Net I, Art-Net II and Art-Net 3. Configurable broadcast override
KiNET	KiNET V1, V2, V3; PDS/Data Enabler discovery
Pathport	Pathway Connectivity protocol
EDN	Via EDN: natively integrate, and output DMX, with the EDN
SPI	Via EDN+SDI: synchronous and asynchronous serial data output
DALI	Via RIO D
Simultaneous	Multiple protocols can be in operation simultaneously. Limited by patched channels, not universes used
Scalable	Synchronises with up to 40 Pharos Designer Controllers over network

Triggering & Integration

Startup	Commences programmed playback automatically on receiving power
Contact Closures	Connect an external volt-free switch between input and ground (internal 2.2k pull-up to 5V)
Digital In	Connect an external voltage source between input and ground (24V maximum; internal 2MΩ pull-down to 0V); software configurable low/high threshold
Analog In	Connect an external voltage source between input and ground (24V maximum); software-configurable range
Outputs	Via RIO: isolated relay outputs (48V, 250mA)
Clock	Battery-backed real-time clock for calendar and time-based triggers
Astronomical	Sunrise/Sunset/Twilight and Lunar phases
Ethernet	UDP, TCP, Multicast; send/receive any Ethernet message
Serial Data	RS232, RS485; configurable port; send/receive free syntax in ASCII, HEX or decimal
MIDI	MIDI Notes, SysEx or MIDI Time Code
Timecode	Via RIO A: Linear Timecode (SMPTE, Film, EBU, NTSC)
Audio Level	Via RIO A: stereo 30-band spectrum analysis
DMX	Trigger on changes within a range or entering a range
eDMX	sACN or Art-Net (option to pass-thru on local DMX output)
DALI	Via RIO D: transmit and receive DALI commands
Web Interface	Built-in or custom designed
Wall Stations	Integrate with BPS, TPS or TPC
Conditions	Full conditional logic support
Scripting	Lua scripting for total flexibility
IO Modules	Supports our extensive IO Module library for easy integration
Scalable	Supports Pharos Designer Remote Devices


Interfaces

Ethernet	RJ45 socket for 10/100Base-TX Ethernet with Link/Data LEDs; Static IP or DHCP; Dual IP address for eDMX; Supports IEEE 802.1Q VLAN Tagging
DMX512 Serial Inputs	Two isolated DMX ports, RDM compatible * RS232 / RS485 / DMX in *
MIDI In & Out	Eight inputs, individually selectable operating mode for contact closure, digital or analog input *
USB-B socket	MIDI via standard 5-pin DIN USB 1.1 for connection to PC

* Install-friendly 0.200" (5.08mm) plug in rising clamp connectors (included)

Specifications

Power	9-48V DC * or PoE (IEEE802.3af, Class 2), 4W typical
Configuration	Pharos Designer 2
Data Storage	Removable SD Card (supplied)
Temperature	0°C to 50°C (32°F to 122°F)
Humidity	10-50% relative, non-condensing
Ingress	IP40
Physical	8 unit wide DIN rail mounting enclosure (DIN43880 / EN60715 (35/7.5 rail)) 14.4 x 9 x 5.8 cm (5.7 x 3.5 x 2.3 in) 0.5 kg (1.1 lbs)
Shipping	20 x 15 x 12 cm (8 x 6 x 5 in) 0.8 kg (1.8 lbs)
Recovery	Hardware watchdog and recessed reset button

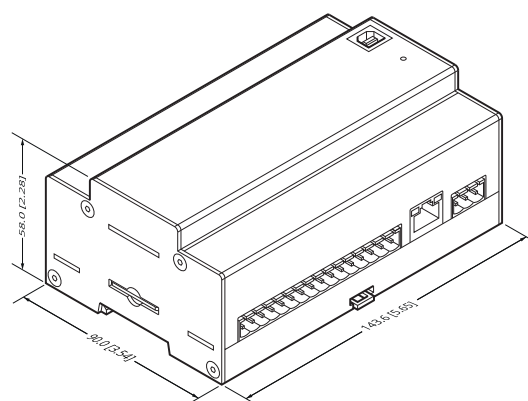

Order Code & Variants

LPC 1	Designer Lighting Playback Controller 1 (512 channels DMX/eDMX)
LPC 2	Designer Lighting Playback Controller 2 (1,024 channels DMX/eDMX)
LPC 4	Designer Lighting Playback Controller 4 (2,048 channels eDMX, 2 local DMX ports)

Warranty & Certifications

Warranty	5 years
Certifications	CE compliant, UKCA compliant, ETL/cETL listed, may be used as part of a Title 24 compliant lighting control system.



Radiis 109

Radiis 109 - 5747828980

The fixture emits even, channelled light. Three types of light systems – zoom, lens and reflectors – together with direction adjustment options and colour and light filters, make it possible to illuminate buildings, vegetation, signs, etc. in an effective and interesting way, while promoting a sense of security.



Product info

Information

An installation sleeve must be used (ordered separately). IP66: Can withstand water pressure of 100 kN/m² from a distance of 3 m for 3 minutes. IP67: Temporary immersion in water (30 minutes at 1m) Holder ring for accessories must be used with the high-output version. Reflector options depend on the fixture type. It is therefore not possible to choose all reflectors for all fixture types. The innovation of the LED technology is constant. The specifications mentioned are based on present technology.

Mounting

An installation sleeve must be used (ordered separately). The IP68 driver box/connection box is pre-mounted with sealed wiring and IP68 connectors. The connecting cable terminates with an IP68 connector (supplied) for cable type H07RN-F Ø7-12mm (2x2.5mm²). Certified to withstand load of up to 2,000 kg.

Finish

Glass, stainless steel.

Materials

Housing: Injection moulded anodised aluminium. Top ring: Brushed stainless steel, 316L. Glass: Extra clear, hardened glass. Driver box: Synthetic. Installation sleeve: Synthetic.

Sizes and weights

Width x Height x Length (mm) | 161 x 2 x 161 Max 1.9 kg | 165 x 2 x 165 Max 1.8 kg

Class

Ingress protection IP66, IP67. IK10. Electric shock protection II wo. ground, III.

Light source

LED 3000K 14W
Lumen: 748

Information

An installation sleeve must be used (ordered separately).


IP66: Can withstand water pressure of 100 kN/m² from a distance of 3 m for 3 minutes.

IP67: Temporary immersion in water (30 minutes at 1m)

Holder ring for accessories must be used with the high-output version.

Reflector options depend on the fixture type. It is therefore not possible to choose all reflectors for all fixture types.

The innovation of the LED technology is constant. The specifications mentioned are based on present technology.

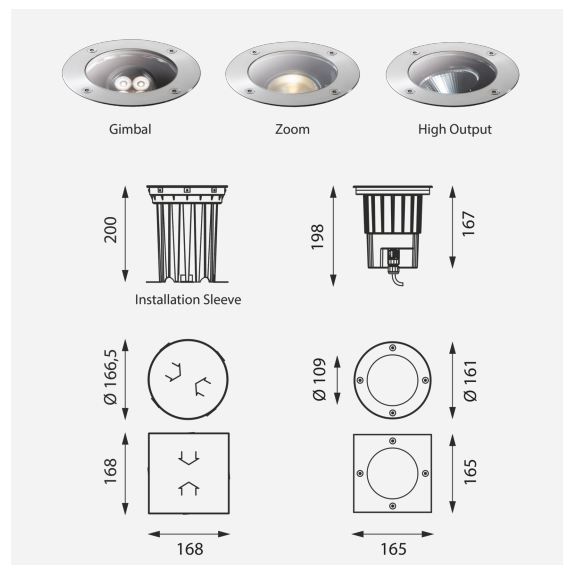


Product family




Radiis 210

Light distribution diagrams


Cartesian

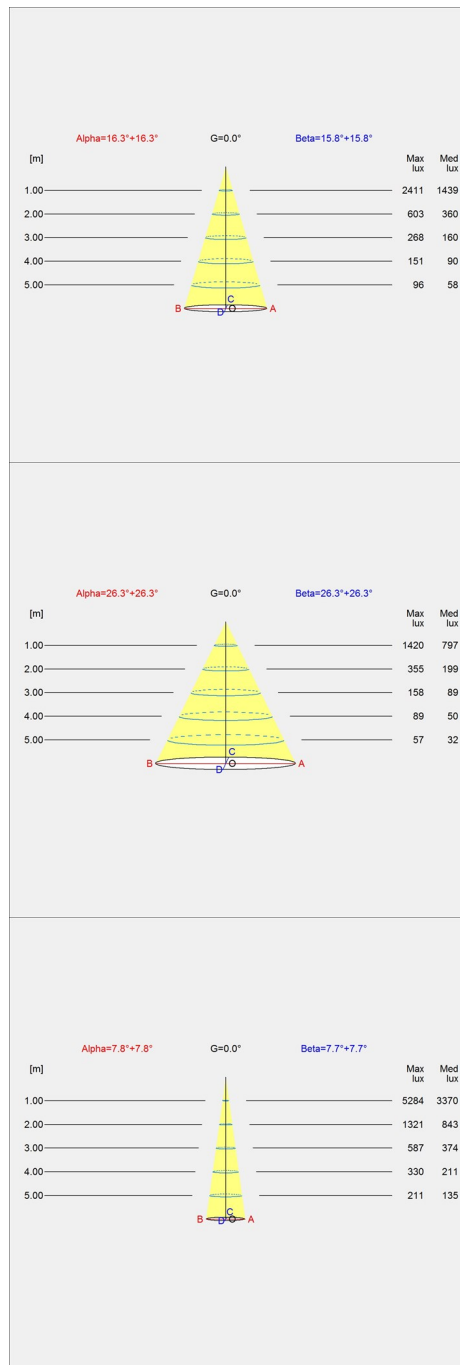


Isolux

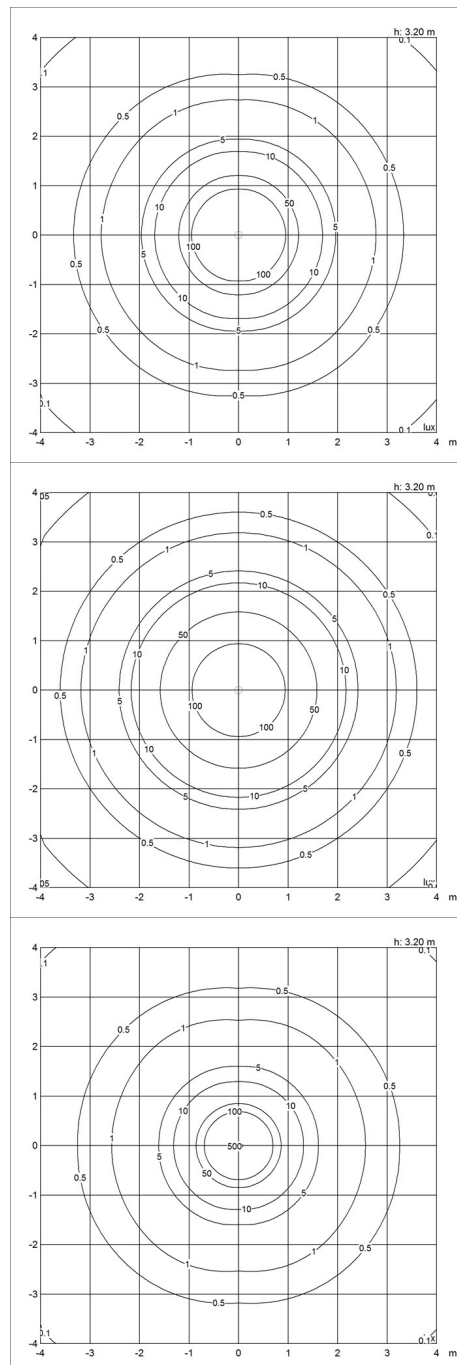


Polar

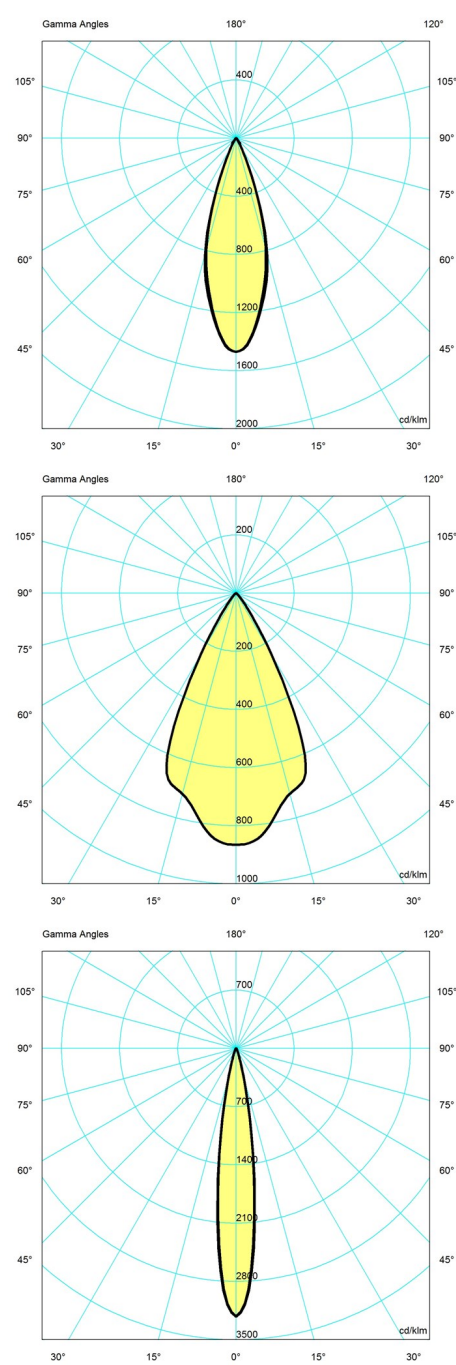


Cartesian

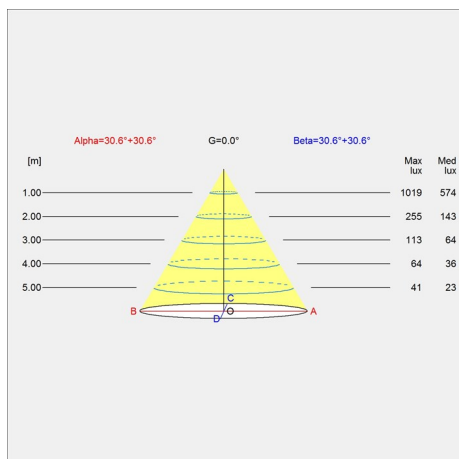

Isolux

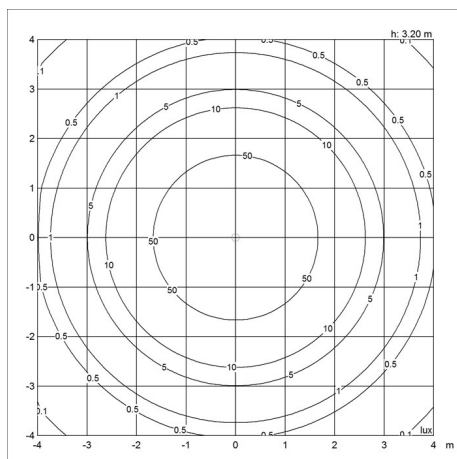

Polar

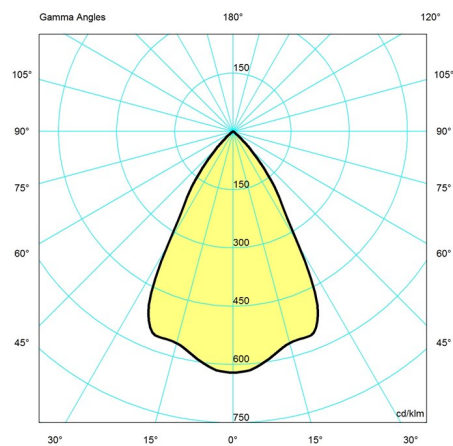

Spare parts & accessories

Product	Variant number
RADIIS 109 INSTALLATION SLEEVE	5747828511
RADIIS 109 INST SLEEVE FOR SQUARED FLUSH	5747828524
RADIIS 109 ANTI GLARE SHADE	5747828537
RADIIS 109 HANDLE FOR FIXTURE REMOVAL	5747828540
Radiis Ø109 round ring brushed steel	5747828553
Radiis Ø109 squared ring brushed steel	5747828566
RADIIS 109 CHROMATIC FILTER RED	5747828773
RADIIS 109 CHROMATIC FILTER GREEN	5747828786
RADIIS 109 CHROMATIC FILTER BLUE	5747828799
RADIIS 109 CHROMATIC FILTER YELLOW	5747828809
RADIIS 109 CHROMATIC FILTER MAGENTA	5747828812
RADIIS 109 CORRECTIVE FILTER COLD	5747828825
RADIIS 109 CORRECTIVE FILTER GOLD	5747828838
RADIIS 109 CORRECTIVE FILTER PEACH	5747828841
RADIIS 109 SPREADING LENS	5747828854
RADIIS 109 BEEHIVE LATTICE	5747828867
RADIIS 109 HE HOLDER RING	5747828870
Radiis torx L-Key T30	5747828896
Radiis connector IP68 4P 15MM	5747828919
Radiis connector IP68 1in-3out 4P 15MM	5747828922
Radiis sucker	5747828935
Radiis Ø109 driver 70W 48V DC	5747828948
Radiis Ø109 driver 150W 48V DC	5747828951
Radiis Ø109 driver 240W 48V DC	5747828964
Radiis Ø109 driver 480W 48V DC	5747828977
RADIIS 109 INST. SLEEVE EXTENSION	5747829471

Data specifications

Colour	Stainless steel
Width	161
IP class	66
Class	II
Wind Load (m2)	-
Power Factor (P = 100 % / P = 50 %)	-
Light source	LED 3000K 14W
CRI	80
Lumen	748
Efficacy	53
Min. Dim Level (%)	-
BUG Rating	B1 U0 G0
Driver life	-

Length	161
Height	2
IK class	10
Net Weight	1.9
Standby (W)	-
Inrush Current	-
Kelvin	3000
SDCM	-
Watt	14
Light control	-
Surge Protection	-
L80B50 (hours)	-