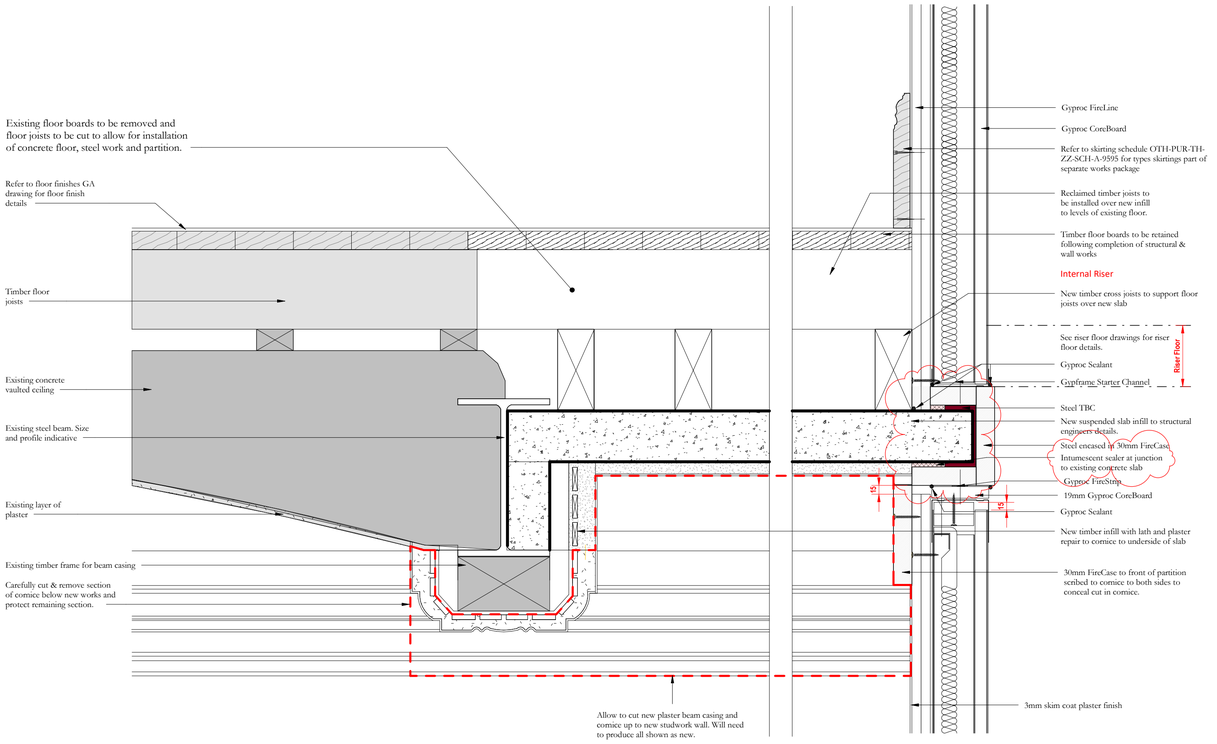

SW- S5a Intermediate floor PFC Trimmers - A

1 : 5

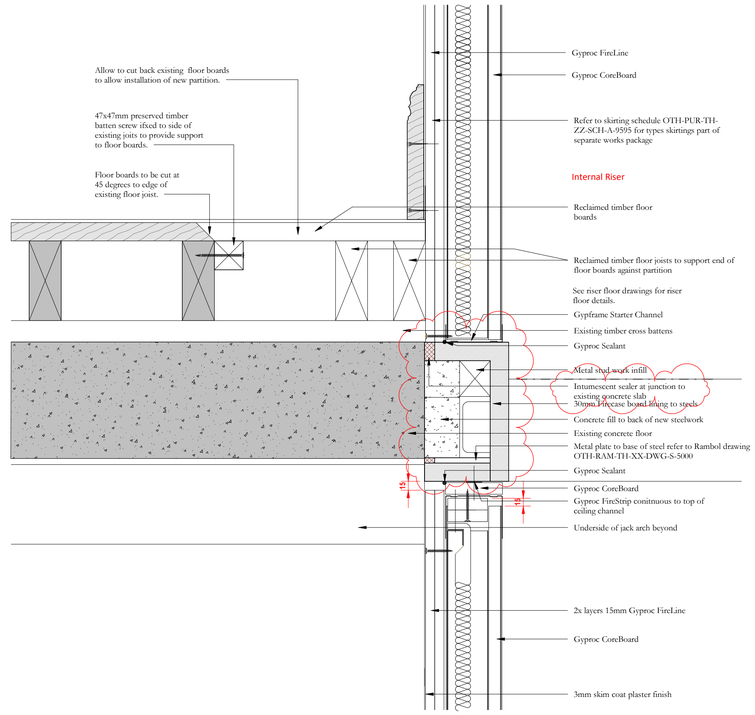

SW-S5b Intermediate floor PFC Trimmers - B

1 : 5

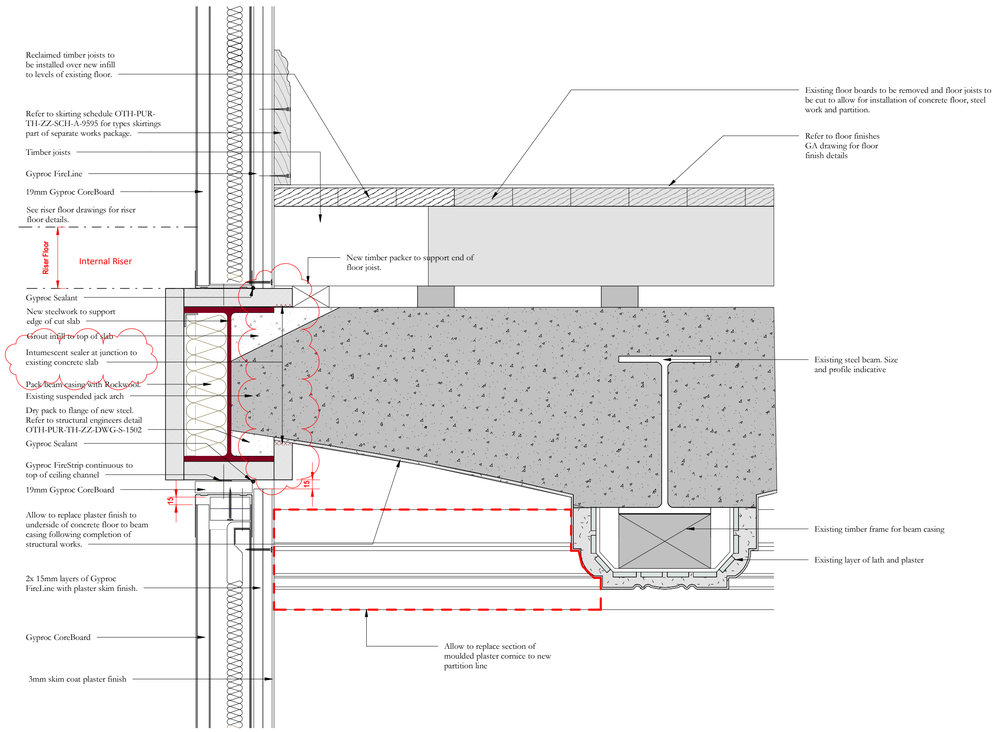

SW- S6a Intermediate floor PFC Trimmers - A

1 : 5

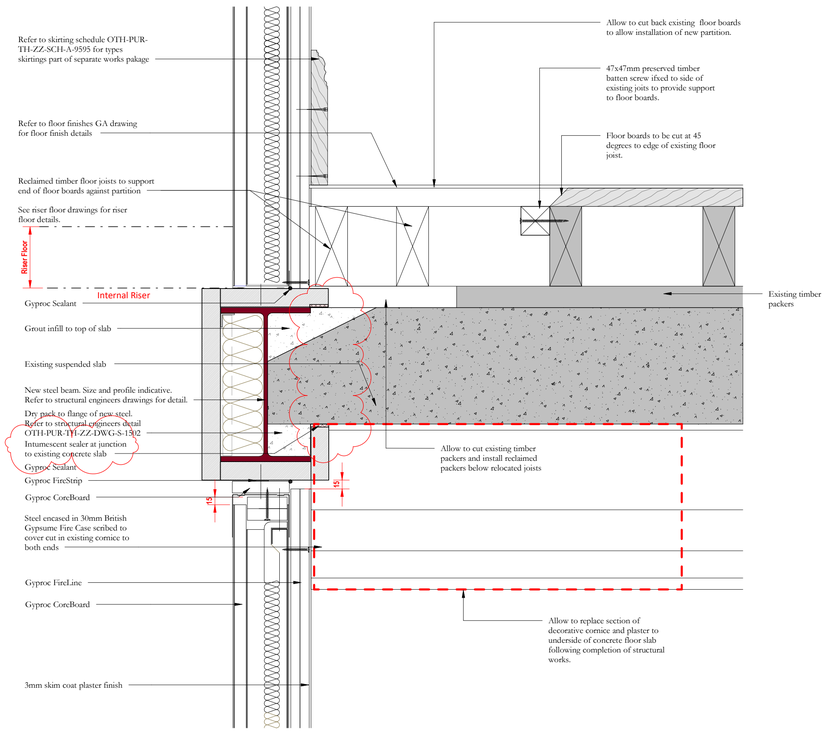

SW-S6b Intermediate floor PFC Trimmers - B

1 : 5

Scale Bars to be used as guidance only - refer to sheet size below

1:100	mm	1000		3000		5000		7000
1:200	mm	5000		8000		12000		16000
1:500	M	5		15		25		35
1:1250	M	10		30		50		70		90

Notes:
Drawings are based on survey data and may not accurately represent what is physically present.
Do not scale from this drawing. All dimensions are to be verified on site before proceeding with the work.
All dimensions are in millimeters unless noted otherwise.
Purcell shall be notified in writing of any discrepancies.

Key Plan

NOTES:
All partitions are to be installed in strict accordance with British Gypsum approved installation details.

Refer to wall types plans and wall build-up drawings for required partition and lining required. The linings as shown on these drawings are to illustrate interface detail only.

Fire resisting partition construction are designed using British Gypsum systems and data tested as BS EN 1364-2:1999

These drawing details are to be read in conjunction with the following information:

Where works are required to floor boards to facilitate installation details refer to drawing OTH-PUR-TH-ZZ-DWG-A-8403

Detail drawings are to show interface and connection details. Partition build ups are identified as 'Varies' as they are dependent on the wall type required.
Refer to Detailed Wall Types Plans and Partition and Lining Types drawings for wall type and location required.

Skirting boards to be secured with minimum 2 screw fixings to each stud fixings to be counter sunk and pelleted. as specification G20/575A. Bottom fixing o be through studwork floor channel other fixings to be into vertieal stud locations.

All joints to unplastered firecase to be sealed with Gyproc Eass-Fill.

Detailed Wall Types Plans:

OTH-PUR-TH-LG-DWG-A-8502
OTH-PUR-TH-LG-DWG-A-8503
OTH-PUR-TH-LG-DWG-A-8504
OTH-PUR-TH-LG-DWG-A-8505
OTH-PUR-TH-GF-DWG-A-8506
OTH-PUR-TH-GF-DWG-A-8507
OTH-PUR-TH-GF-DWG-A-8508
OTH-PUR-TH-GF-DWG-A-8509
OTH-PUR-TH-01-DWG-A-8510
OTH-PUR-TH-01-DWG-A-8511
OTH-PUR-TH-01-DWG-A-8512
OTH-PUR-TH-01-DWG-A-8513
OTH-PUR-TH-02-DWG-A-8514
OTH-PUR-TH-02-DWG-A-8515
OTH-PUR-TH-02-DWG-A-8516
OTH-PUR-TH-02-DWG-A-8517
OTH-PUR-TH-03-DWG-A-8518
OTH-PUR-TH-03-DWG-A-8519
OTH-PUR-TH-04-DWG-A-8520
OTH-PUR-TH-04-DWG-A-8521
OTH-PUR-TH-04-DWG-A-8522
OTH-PUR-TH-04-DWG-A-8523
OTH-PUR-TH-05-DWG-A-8524
OTH-PUR-TH-05-DWG-A-8525
OTH-PUR-TH-06-DWG-A-8526
OTH-PUR-TH-06-DWG-A-8527
OTH-PUR-TH-06-DWG-A-8528
OTH-PUR-TH-07-DWG-A-8529
OTH-PUR-TH-07-DWG-A-8530

Refer to the following drawings for the Wall Types

OTH-PUR-TH-ZZ-DWG-A-5680
OTH-PUR-TH-ZZ-DWG-A-5681

Refer to the Following Details Schedules:

Riser Details Key Matrix - OTH-PUR-TH-ZZ-SCH-A-8220
Studwork Wall Detail List - OTH-PUR-TH-ZZ-SCH-A-8221
Riser Detail List Reference - OTH-PUR-TH-ZZ-SCH-A-8222

Refer to Specification:
OTH-PUR-TH-ZZ-SPE-A-5901 VHS Rooms & Room Type Repairs inc. Methodology
OTH-PUR-TH-ZZ-SPE-A-5935 G20 Internal Carpentry, Timber Framing, First Fix
OTH-PUR-TH-ZZ-SPE-A-5926 K10 Gypsum Board Dry Linings/ Partitions/ Ceilings
OTH-PUR-TH-ZZ-SPE-A-5925 J40 Flexible sheet waterproofing/ damp proofing
OTH-PUR-TH-ZZ-SPE-A-5932 P10 Sundry Insulation/ Proofing Work
OTH-PUR-TH-ZZ-SPE-A-5921 P20 Unframed Isolated Trims/Skirtings/Sundry Items
OTH-PUR-TH-ZZ-SPE-A-5936 Z20 Fixings
OTH-PUR-TH-ZZ-SPE-A-5939 Z22 Sealants

ISSUE	DATE	APPROVED	DRAWN	DESCRIPTION
03	28/06/2021	NW	DR	Update fot Tender - Intumescent sealer, Annotation
02	17/05/2021	NM	MP	Issued for Priority 2 Partitions - Specification references added
01	26/04/2021	DW	MP	Updated following LL Comments
-	26/02/2021	NM	DW	Issued for Priority 1 Partition Package

OUR TOWN HALL PROJECT
PURCELL
Project Office, Room 308, Town Hall, MANCHESTER M60 2L1
+44 (0) 7970 097 432
www.purcelluk.com

PROJECT STATUS	RIBA STAGE 4
CLIENT	Manchester City Council
PROJECT	OUR TOWN HALL
DRAWING TITLE	Risers Interface Details (sheet 2)
SIZE & SCALE	A1: As indicated
DRAWING STATUS	For Tender
JOB NUMBER	236959
DRAWING NO.	OTH-PUR-TH-ZZ-DWG-A-8178
REV	03

© PURCELL 2019. PURCELL ® IS THE TRADING NAME OF PURCELL ARCHITECTURE LTD.

28/06/2021 16:12:02